

A dark-colored SUV is parked on a gravel path in a wooded area at dusk. A modern, cylindrical outdoor lamp on a thin pole stands to the left of the vehicle, casting a warm glow on the surrounding foliage and the gravel. The background is filled with dense trees and bushes under a twilight sky. The text 'davide groppi' and 'LUCE FUORI' is overlaid on the right side of the image.

davide groppi
LUCE FUORI

Luce Fuori è la nostra proposta di
corpi illuminanti per l'esterno.
Sono luci delicate e smaterializzate,
pensate per considerare il giardino o il terrazzo
come a un'altra stanza della casa ...

Luce Fuori is our offer for outdoor lamps.
They are gentle and dematerialized,
thought to consider the garden or the terrace
as another room of the house ...



LIGHT INSTALLATION

Pietrasanta, Italy, 2020








PRIVATE RESIDENCE
Garda Lake, Italy, 2019



DESIGN OMAR CARRAGLIA - 2013
 LAMPADA DA ESTERNO - METALLO
 OUTDOOR LAMP - METAL
 US VERSION AVAILABLE

IMU

CE  IP 65




172300	STANDARD	MAX 350 mA DC - 5,5 W LED - 3000K - 306 lm - CRI > 80 DRIVER LED INCLUSO INPUT 110-240 V - 50/60 Hz - IP68 - NON DIMMERABILE INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - IP68 - NOT DIMMABLE



DESIGN DAVIDE GROPPPI - GIORGIO RAVA - 2020
 LAMPADA DA ESTERNO - FIBRA DI VETRO - METALLO
 OUTDOOR LAMP - FIBERGLASS - METAL
 US VERSION AVAILABLE

CE  IP 65

ORIGINE OUTDOOR

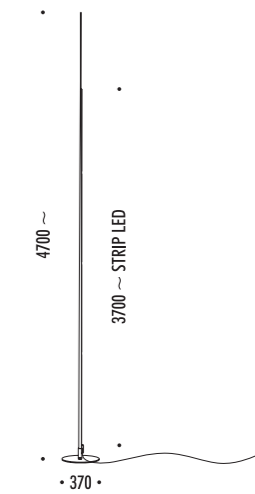


1A08904	NERO OPACO / MATT BLACK	24 V DC - 40 W LED - 3000K - 2380 lm - CRI > 90 CAVO NERO 5 m DRIVER LED INCLUSO INPUT 110-240 V - 50/60 Hz - IP67 - DIMMERABILE 1-10 V BLACK CABLE 5 m INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - IP67 - 1-10 V DIMMABLE



Compasso d'Oro ADI
Award 2014

DESIGN ENZO CALABRESE - DAVIDE GROPPI - 2011
LAMPADA DA ESTERNO - FIBRA DI VETRO - METALLO
OUTDOOR LAMP - FIBERGLASS - METAL
US VERSION AVAILABLE

CE  IP 65

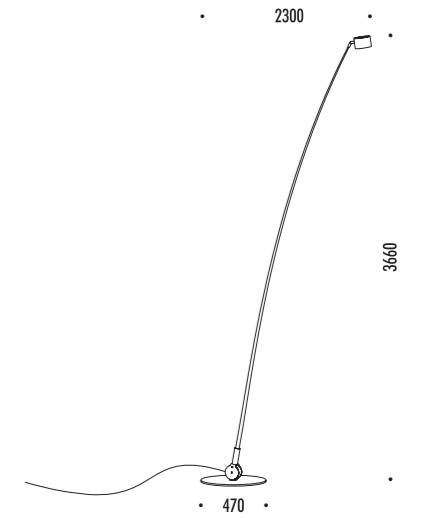

SAMPEI 440 OUTDOOR


179803	BIANCO OPACO / MATT WHITE - 3000K	MAX 700 mA DC - 8,4 W LED - 639 lm - CRI > 90
179803-27	BIANCO OPACO / MATT WHITE - 2700K	CAVO NERO 5 m - ORIENTABILE
179804	NERO OPACO / MATT BLACK - 3000K	DRIVER LED INCLUSO INPUT 220-240 V - 50/60 Hz - IP67 - NON DIMMERABILE
179804-27	NERO OPACO / MATT BLACK - 2700K	BLACK CABLE 5 m - ADJUSTABLE
		INCLUDES LED DRIVER INPUT 220-240 V - 50/60 Hz - IP67 - NOT DIMMABLE



DESIGN MAURIZIO MANCINI - 2012
LAMPADA DA ESTERNO - METALLO
OUTDOOR LAMP - METAL

CE  IP 67


BELLADINOTTE

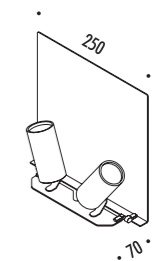

187200	STANDARD	24 V DC - 2 x 4,2 W LED - 3000K - 2 x 282 lm - CRI > 90 ORIENTABILE DRIVER LED NON INCLUSO ADJUSTABLE LED DRIVER NOT INCLUDED

ACCESSORI OBBLIGATORI / COMPULSORY ACCESSORIES

51490120	STANDARD	DRIVER LED INPUT 220-240 V - 50/60 Hz - OUTPUT 24 V DC - 36 W - IP67 NON DIMMERABILE - NOT DIMMABLE

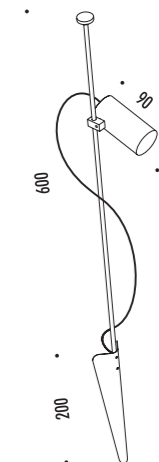

185604	NERO OPACO / MATT BLACK	24 V DC - 4,2 W LED - 3000K - 282 lm - CRI > 90 ORIENTABILE DRIVER LED NON INCLUSO ADJUSTABLE LED DRIVER NOT INCLUDED
--------	-------------------------	---

ACCESSORI OBBLIGATORI / COMPULSORY ACCESSORIES

51490120	STANDARD	DRIVER LED INPUT 220-240 V - 50/60 Hz - OUTPUT 24 V DC - 36 W - IP67 NON DIMMERABILE - NOT DIMMABLE
----------	----------	---


ACCESSORI OPZIONALI / OPTIONAL ACCESSORIES

184904	NERO OPACO / MATT BLACK	TESTA LED SUPPLEMENTARE / ADDITIONAL LED HEAD 24 V DC - 4,2 W LED - 3000K - 282 lm - CRI > 90
--------	-------------------------	--

179900	STANDARD	STELO SUPPLEMENTARE 1 m / ADDITIONAL STEM 1 m
--------	----------	---



CE  IP 65

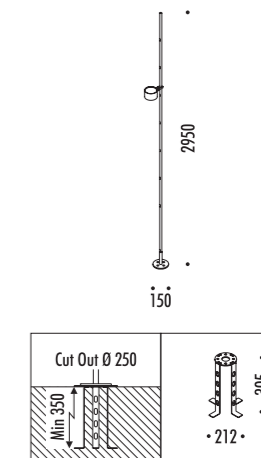

173900	STANDARD - 3000K	MAX 700 mA DC - 8,4 W LED - 639 lm - CRI > 90
173900-27	STANDARD - 2700K	CAVO NERO 7 m - KIT INSTALLAZIONE OPZIONALE NON INCLUSO
		DIMENSIONI TAGLIO Ø 250 mm
		SPAZIO MINIMO PER INCASSO 350 mm
		ORIENTABILE
		DRIVER LED INCLUSO (700 mA DC) INPUT 220-240 V - 50/60 Hz - IP67 - NON DIMMERABILE
		BLACK CABLE 7 m - OPTIONAL INSTALLATION KIT NOT INCLUDED
		CUT-OUT Ø 250 mm
		MINIMUM SPACE FOR MOUNTING 350 mm
		ADJUSTABLE
		INCLUDES LED DRIVER (700 mA DC) INPUT 220-240 V - 50/60 Hz - IP67 - NOT DIMMABLE

KIT INSTALLAZIONE OPZIONALI / OPTIONAL INSTALLATION KITS


177300	STANDARD	TIRAFONDO INSTALLAZIONE / INSTALLATION ANCHORING BOLT
--------	----------	---

ACCESSORI OPZIONALI / OPTIONAL ACCESSORIES

185104	NERO OPACO / MATT BLACK - 3000K	TESTA LED SUPPLEMENTARE / ADDITIONAL LED HEAD
185104-27	NERO OPACO / MATT BLACK - 2700K	MAX 700 mA DC - 8,4 W LED - 639 lm - CRI > 90
		KIT INSTALLAZIONE OBBLIGATORIO NON INCLUSO / COMPULSORY INSTALLATION KIT NOT INCLUDED

KIT INSTALLAZIONE OBBLIGATORIO PER TESTA LED SUPPLEMENTARE / COMPULSORY INSTALLATION KIT FOR ADDITIONAL LED HEAD

51490060	STANDARD	DRIVER LED
		INPUT 220-240 V - 50/60 Hz - OUTPUT 700 mA DC - 14 W - IP67
		NON DIMMERABILE - NOT DIMMABLE

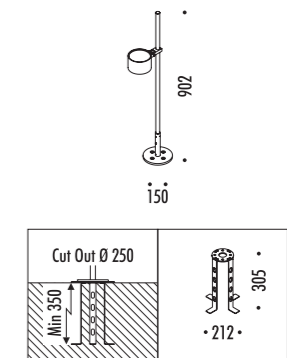

1A14400	STANDARD - 3000K	MAX 700 mA DC - 8,4 W LED - 639 lm - CRI > 90
1A14400-27	STANDARD - 2700K	CAVO NERO 9 m - KIT INSTALLAZIONE OPZIONALE NON INCLUSO
		DIMENSIONI TAGLIO Ø 250 mm
		SPAZIO MINIMO PER INCASSO 350 mm
		ORIENTABILE
		DRIVER LED INCLUSO (350 mA DC) INPUT 110-240 V - 50/60 Hz - IP68 - NON DIMMERABILE
		BLACK CABLE 9 m - OPTIONAL INSTALLATION KIT NOT INCLUDED
		CUT-OUT Ø 250 mm
		MINIMUM SPACE FOR MOUNTING 350 mm
		ADJUSTABLE
		INCLUDES LED DRIVER (350 mA DC) INPUT 110-240 V - 50/60 Hz - IP68 - NOT DIMMABLE

KIT INSTALLAZIONE OPZIONALI / OPTIONAL INSTALLATION KITS


177300	STANDARD	TIRAFONDO INSTALLAZIONE / INSTALLATION ANCHORING BOLT
--------	----------	---

ACCESSORI OPZIONALI / OPTIONAL ACCESSORIES

185104	NERO OPACO / MATT BLACK - 3000K	TESTA LED SUPPLEMENTARE / ADDITIONAL LED HEAD
185104-27	NERO OPACO / MATT BLACK - 2700K	MAX 700 mA DC - 8,4 W LED - 639 lm - CRI > 90
		KIT INSTALLAZIONE OBBLIGATORIO NON INCLUSO / COMPULSORY INSTALLATION KIT NOT INCLUDED

KIT INSTALLAZIONE OBBLIGATORIO PER TESTA LED SUPPLEMENTARE / COMPULSORY INSTALLATION KIT FOR ADDITIONAL LED HEAD

50240880	STANDARD	DRIVER LED
		INPUT 110-240 V - 50/60 Hz - OUTPUT 350 mA DC - 17 W - IP68
		NON DIMMERABILE - NOT DIMMABLE

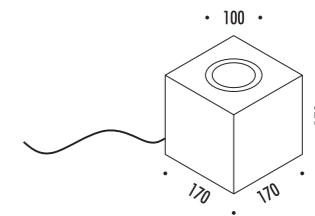


1A11500	STANDARD	MAX 500 mA DC - 20 W LED - 10° - 3000K - 2058 lm - CRI > 90 CAVO NERO 2,5 m DRIVER LED INCLUSO INPUT 110-240 V - 50/60 Hz - IP68 - NON DIMMERABILE CONNETTORI DRIVER 2 PEZZI INCLUSI BLACK CABLE 2,5 m INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - IP68 - NOT DIMMABLE DRIVER CONNECTORS 2 PIECES INCLUDED




DESIGN BESTETTI ASSOCIATI - DAVIDE GROPPI - 2011
 LAMPADA DA ESTERNO - METACRILATO - METALLO - POLICARBONATO
 OUTDOOR LAMP - METHACRYLATE - METAL - POLYCARBONATE
 US VERSION AVAILABLE

LENTA

CE IP 65

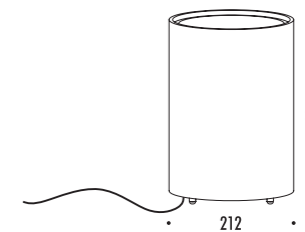


156003	BIANCO OPACO / MATT WHITE	220-240 V - 50/60 Hz - MAX 18 W LED - E27 CAVO NERO 5 m - LAMPADINA LED INCLUSA BLACK CABLE 5 m - LED BULB INCLUDED
		💡 13 W LED - 2700K - 1521 lm - CRI 90 - DIMMABLE - EFFICIENCY A+

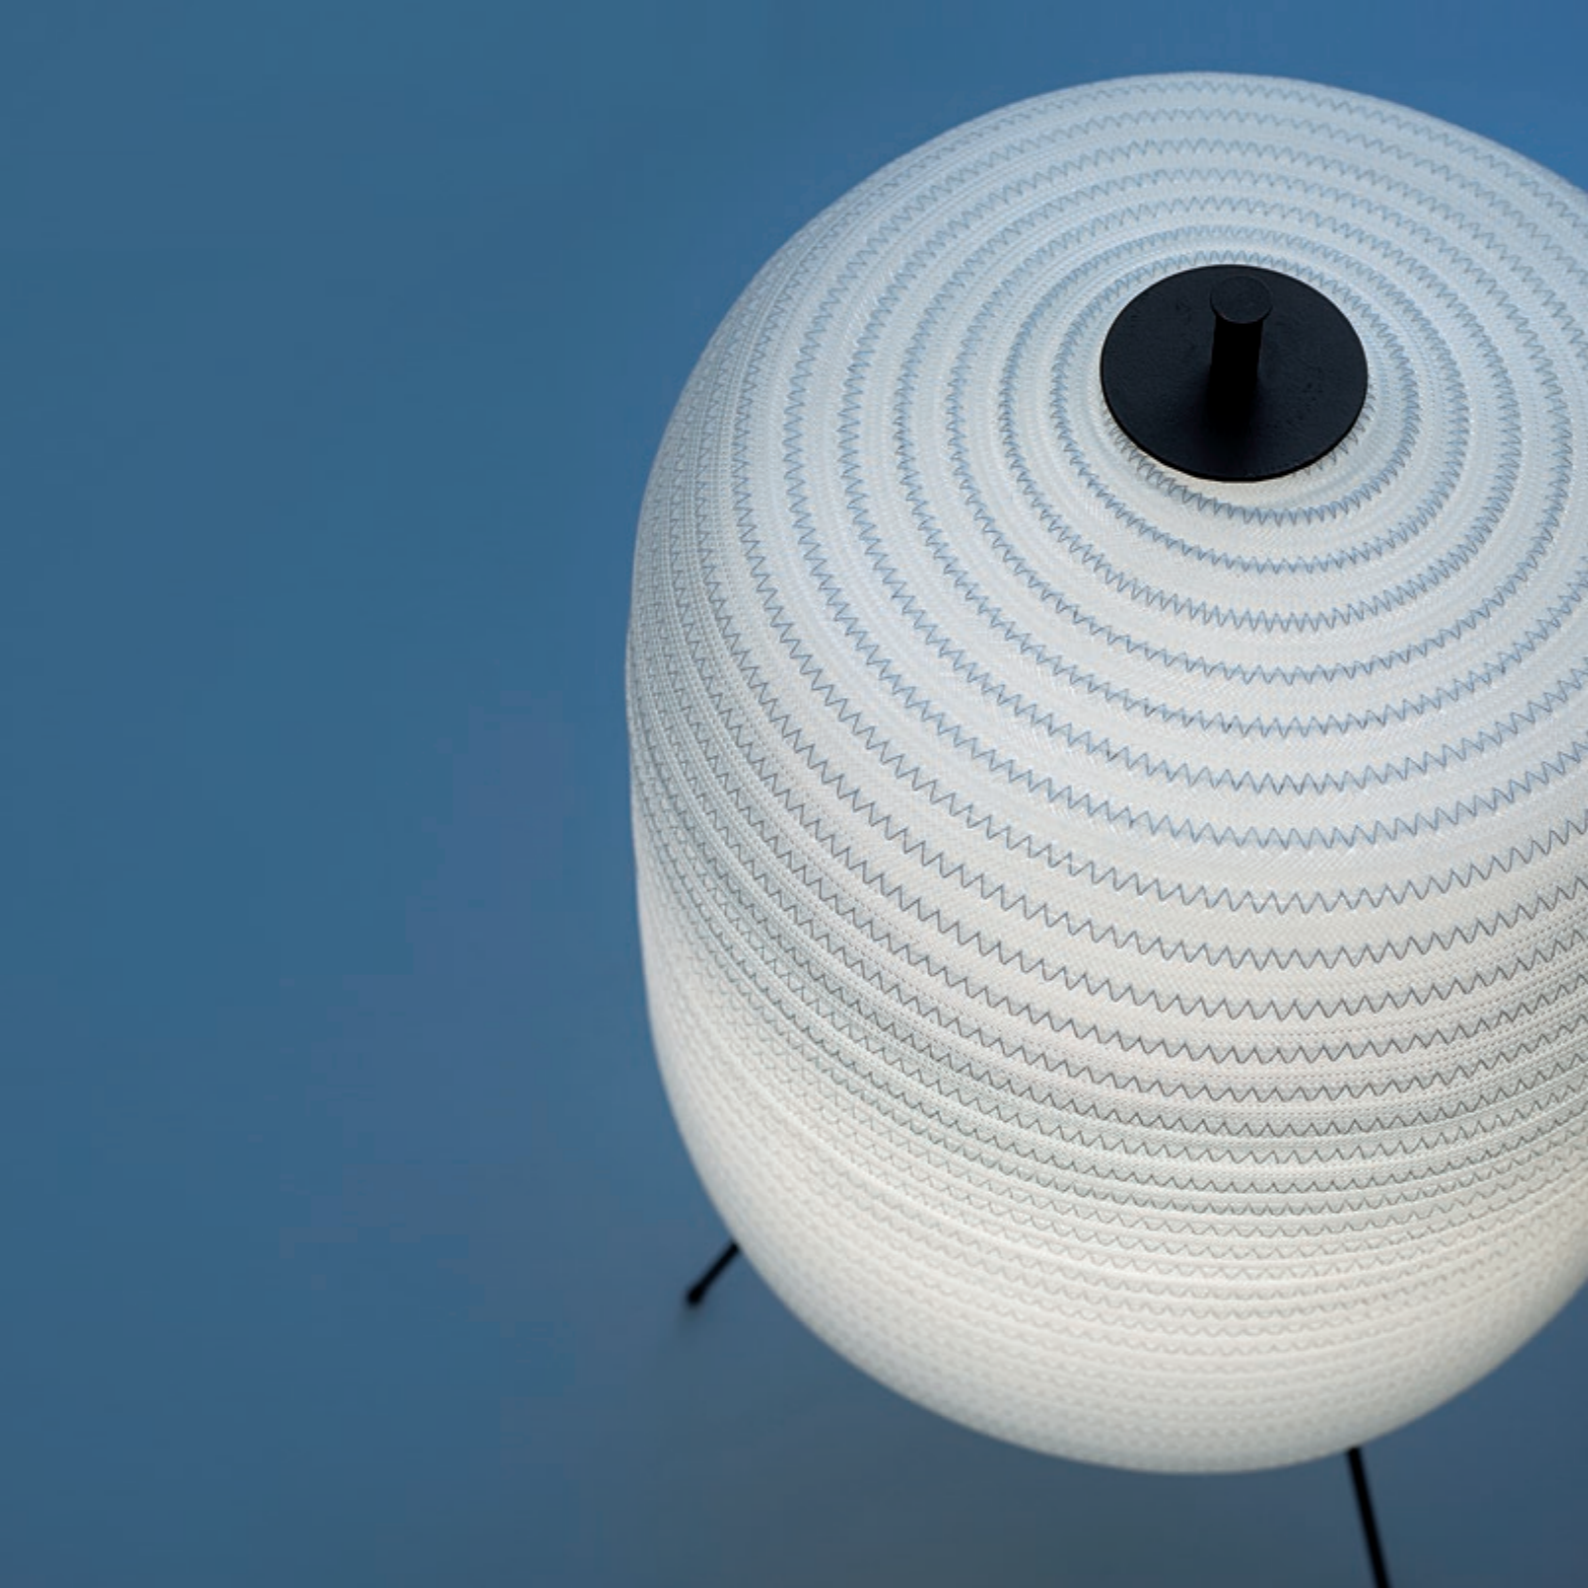


DESIGN DAVIDE GROPPI - PAOLA LENTI - 2013
 LAMPADA DA ESTERNO - METALLO - PBT - POLICARBONATO
 OUTDOOR LAMP - METAL - PBT - POLYCARBONATE


SHOJI OUTDOOR

CE IP 65

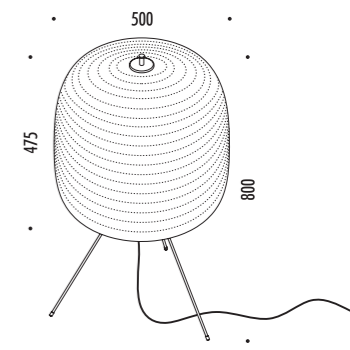


188600	STANDARD	100-240 V - 50/60 Hz - MAX 18 W LED - E27 CAVO NERO 5 m - LAMPADINA LED INCLUSA BLACK CABLE 5 m - LED BULB INCLUDED
		 13 W LED - 2700K - 1521 lm - CRI 90 - DIMMABLE - EFFICIENCY A+

CE  IP 67

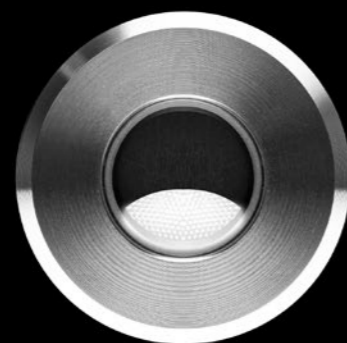

16

• 35 •


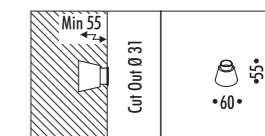


1A15303	BIANCO OPACO / MATT WHITE - 3000K	MAX 350 mA DC - 1 W LED - 3000K - 33 lm - CRI > 90 / 2700K - 31 lm - CRI > 90
1A15303-27	BIANCO OPACO / MATT WHITE - 2700K	KIT INSTALLAZIONE OBBLIGATORIO NON INCLUSO
1A15311	INOX LUCIDO / POLISHED STAINLESS STEEL - 3000K	DIMENSIONI TAGLIO Ø 31 mm
1A15311-27	INOX LUCIDO / POLISHED STAINLESS STEEL - 2700K	SPAZIO MINIMO PER INCASSO 55 mm
		COMPULSORY INSTALLATION KIT NOT INCLUDED
		CUT-OUT Ø 31 mm
		MINIMUM SPACE FOR MOUNTING 55 mm

KIT INSTALLAZIONE OBBLIGATORI / COMPULSORY INSTALLATION KITS

1A15400	STANDARD	CASSAFORMA INSTALLAZIONE / INSTALLATION BOX
50240880	STANDARD	DRIVER LED INPUT 110-240 V - 50/60 Hz - OUTPUT 350 mA DC - 17 W - IP68 NON DIMMERABILE - NOT DIMMABLE
1A16600	STANDARD	CONNETTORI DRIVER IP68 - 2 PEZZI / DRIVER CONNECTORS IP68 - 2 PIECES

CE  IP 67


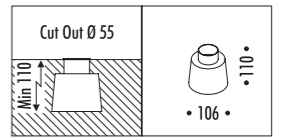
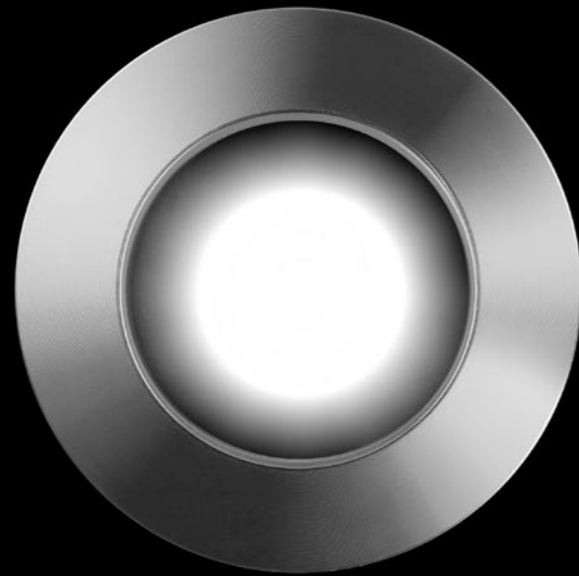


1A15511	INOX LUCIDO / POLISHED STAINLESS STEEL	24 V DC - 7 W LED - 36° - 3000K - 546 lm - CRI > 90 KIT INSTALLAZIONE OBBLIGATORIO NON INCLUSO DIMENSIONI TAGLIO Ø 55 mm - SPAZIO MINIMO PER INCASSO 110 mm COMPULSORY INSTALLATION KIT NOT INCLUDED CUT-OUT Ø 55 mm - MINIMUM SPACE FOR MOUNTING 110 mm
---------	--	--

KIT INSTALLAZIONE OBBLIGATORI / COMPULSORY INSTALLATION KITS

1A15600	STANDARD	CASSAFORMA INSTALLAZIONE / INSTALLATION BOX
51490120	STANDARD	DRIVER LED INPUT 220-240 V - 50/60 Hz - OUTPUT 24 V DC - 36 W - IP67 NON DIMMERABILE - NOT DIMMABLE
1A16600	STANDARD	CONNETTORI DRIVER IP68 - 2 PEZZI / DRIVER CONNECTORS IP68 - 2 PIECES



CE  IP 67

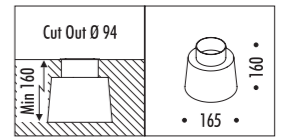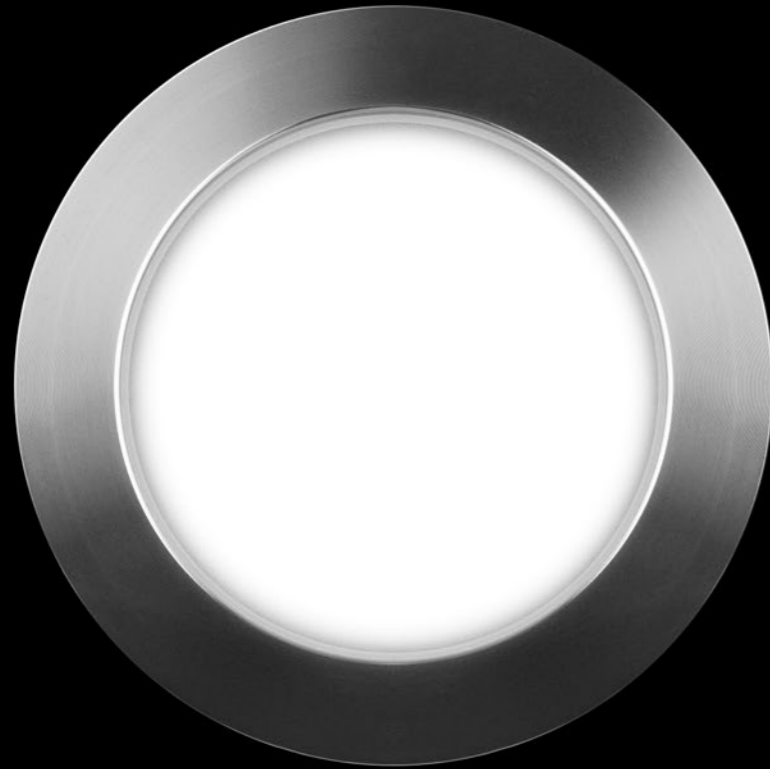

1A15711	INOX LUCIDO / POLISHED STAINLESS STEEL - 10°	MAX 500 mA DC - 20 W LED - 10° - 3000K - 2058 lm - CRI > 90 KIT INSTALLAZIONE OBBLIGATORIO NON INCLUSO DIMENSIONI TAGLIO Ø 94 mm - SPAZIO MINIMO PER INCASSO 160 mm COMPULSORY INSTALLATION KIT NOT INCLUDED CUT-OUT Ø 94 mm - MINIMUM SPACE FOR MOUNTING 160 mm
1A15811	INOX LUCIDO / POLISHED STAINLESS STEEL - 23°	MAX 500 mA DC - 20 W LED - 23° - 3000K - 2058 lm - CRI > 90 KIT INSTALLAZIONE OBBLIGATORIO NON INCLUSO DIMENSIONI TAGLIO Ø 94 mm - SPAZIO MINIMO PER INCASSO 160 mm COMPULSORY INSTALLATION KIT NOT INCLUDED CUT-OUT Ø 94 mm - MINIMUM SPACE FOR MOUNTING 160 mm

KIT INSTALLAZIONE OBBLIGATORI / COMPULSORY INSTALLATION KITS

1A15900	STANDARD	CASSAFORMA INSTALLAZIONE / INSTALLATION BOX
50241070	STANDARD	DRIVER LED INPUT 110-240 V - 50/60 Hz - OUTPUT 500 mA DC - 25 W - IP68 NON DIMMERABILE - NOT DIMMABLE
1A16600	STANDARD	CONNETTORI DRIVER IP68 - 2 PEZZI / DRIVER CONNECTORS IP68 - 2 PIECES



1A16004	NERO OPACO / MATT BLACK - 10°	MAX 500 mA DC - 2 W LED - 3000K - 133 lm - CRI>90 KIT INSTALLAZIONE OBBLIGATORIO NON INCLUSO ORIENTABILE ACCESSORI OPZIONALI NON INCLUSI COMPULSORY INSTALLATION KIT NOT INCLUDED ADJUSTABLE OPTIONAL ACCESSORIES NOT INCLUDED
1A16104	NERO OPACO / MATT BLACK - 25°	



KIT INSTALLAZIONE OBBLIGATORI / COMPULSORY INSTALLATION KITS

50241070	STANDARD	DRIVER LED INPUT 110-240 V - 50/60 Hz - OUTPUT 500 mA DC - 25 W - IP68 NON DIMMERABILE - NOT DIMMABLE
1A16600	STANDARD	CONNETTORI DRIVER IP68 - 2 PEZZI / DRIVER CONNECTORS IP68 - 2 PIECES




ACCESSORI OPZIONALI / OPTIONAL ACCESSORIES


1A16200	STANDARD	PICCHETTO / EARTH SPIKE	

1A16300	STANDARD	BASSETTA PARETE / WALL BACK PLATE	




194603	BIANCO OPACO / MATT WHITE	MAX 700 mA DC - 8,4 W LED - 3000K - 639 lm - CRI>90
194604	NERO OPACO / MATT BLACK	ORIENTABILE
		DRIVER LED INCLUSO INPUT 220-240 V - 50/60 Hz - IP67 - NON DIMMERABILE
		ADJUSTABLE
		INCLUDES LED DRIVER INPUT 220-240 V - 50/60 Hz - IP67 - NOT DIMMABLE

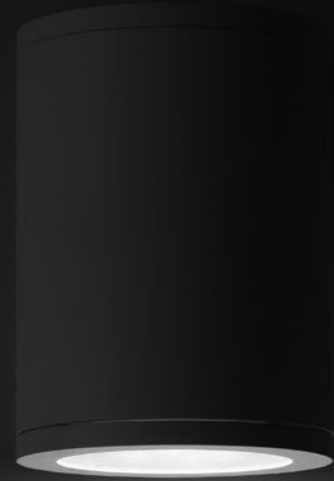


158603	BIANCO OPACO / MATT WHITE	100-240 V - 50/60 Hz - MAX 12 W LED - E27 ORIENTABILE - NON DIMMERABILE - LAMPADINA LED INCLUSA ADJUSTABLE - NOT DIMMABLE - LED BULB INCLUDED
		 9,5 W LED - 3000K - 760 lm - CRI 80 - DIMMABLE - EFFICIENCY A+

CE IP 65



172603	BIANCO OPACO / MATT WHITE - 3000K	220-240 V - 50/60 Hz - 18 W LED - 1000 lm - CRI > 80 DIMMERABILE TRIAC / IGBT TRIAC / IGBT DIMMABLE
172603-27	BIANCO OPACO / MATT WHITE - 2700K	



daidegroppi.com

Le dimensioni sono espresse in millimetri.

La Davide Groppi srl revisiona costantemente i propri prodotti per poter offrire sempre il meglio della tecnologia disponibile.

Per questo motivo i cataloghi e le schede prodotto sono in continua evoluzione.

Le informazioni e i dettagli tecnici più aggiornati sono pubblicati sul nostro sito **www.daidegroppi.com**

The sizes are expressed in millimeters.

Davide Groppi srl is constantly revising its products in order to offer the best and latest technology available.

This is why its catalogues and technical notes are in constant evolution.

You can find the latest information and technical updates on our website **www.daidegroppi.com**

Davide Groppi srl
Via Belizzi 20 / 22
29122 Piacenza - Italia
Ph. +39.0523.571590
info@daidegroppi.com

Davide Groppi srl © 2021
Società soggetta a direzione e coordinamento di Italian Design Brands spa