

davide groppi

HANDBOOK 2025

INDEX

WIRELESS / SENZA FILO	13
35MM	15
BUGIA	19
PoPuP	25
POST PRANDIUM	31
QuiQuoQua	39
TeTaTeT	45
TeTaTeT Flûte	61
VIS À VIS	71

TABLE / TAVOLO	79
ABA	81
ANIMA	85
CALVINO	93
FM	97
MOON T	105
PIGRECO	111
RIBBON	115

FLOOR / TERRA	121
BANNER	123
HASHI	127
MASAI	133
MISTER	141
MOON F	145
MOVIE	151
ORIGINE	155
PABLO	163
Q	169
SAMPEI	175
SHOJI	183
STOP	187

SUSPENSION / SOSPENSIONE	195
CARTESIO	197
CATHODE	201
FOSBURY	211
LED IS MORE	215
LOUIS XIV	219
MAGIA	225
MISS	239
MOON	249
NEURO	263
OVO	273
OVONELPIATTO	277
REFLEX S	281
SHANGHAI	287
SIMBIOSI	291
SOTTILE	301
SOTTOSOPRA	313
SPY	319

WALL / PARETE	323
DOT P	325
DUET	335
EDISON'S NIGHTMARE	339
FILM	343
FOIL	347
FOLDER	351
LINET	359
MIRA	363
MIRA MAGNETIC	371
RAIL	377
REFLEX	381
SHADE	385
SOL 1	389
SOL 2	393
SPOT	397
TOAST	405
VICEVERSA	411

CEILING / SOFFITTO	417
ASINTOTO	419
AURORA	425
DOT PL 51	431
HAKO PL	437
MINI PL 51	441
NULLA PL	445
PUNTO PL	449
PUNTO 2 PL	453
SANMARTINO	457
TRICK TRACK	461

RECESSED / INCASSO	465
BUCO R	467
DOT R	471
MINI 51	477
MINI BIT 51	481
MIRA R	485
NULLA	491
PUNTO	511

SYSTEMS / SISTEMI	517
ENDLESS	519
FLASH	551
INFINITO	571
OHM	591
UTOPIA	607

TRACKS - PROFILES / BINARI - PROFILI	619
BINARIO TRIFASE	621
COLIBRI	637
FRAMELESS	653
LIGHTLINE 0808	661
LIGHTLINE 1010	668
LIGHTLINE 1508	674
LIGHTLINE 2612	681
LIGHTLINE 7454	688

OUTDOOR / ESTERNO	695
BELLADINOTTE	697
BUBKA	701
BUBKA BOLLARD	707
BUIO	711
BUIO - SPOT	721
CHILLOUT	729
GRILLO	733
HAZARD	737
IMU	741
JULIET	745
LENTA	749
NEURO OUTDOOR	753
NUIT	759
ORIGINE OUTDOOR	765
Q²	771
SAMPEI OUTDOOR	775
SHOJI OUTDOOR	783
SPOT OUTDOOR	787
BULBS / LAMPADINE	790
DG111 LED MODULES / MODULI LED DG111	791
DRIVERS / ALIMENTATORI	792
COMMON ACCESSORIES / ACCESSORI COMUNI	796
SUSPENSION KITS / KIT DI SOSPENSIONE	798
COMMERCIAL TERMS / CONDIZIONI COMMERCIALI	801

INDEX

Our codification system consists of a fifteen-digit structure defined as follows:
Il nostro sistema di codifica prevede una struttura a quindici cifre così definita:

1	A	3	0	0	0	3	0	0		2	7		0	0
PRODUCT FAMILY FAMIGLIA PRODOTTO					FINISH FINITURA		INTERNAL USE ONLY SOLO PER USO INTERNO		-	COLOUR TEMPERATURE* TEMPERATURA COLORE*		-	ELECTRIFICATION ELETTRIFICAZIONE	

Finish / Finitura

0	0	Standard
0	1	Polished Chrome / Cromo Lucido
0	3	Matt White / Bianco Opaco
0	4	Matt Black / Nero Opaco
0	8	Brushed Brass / Ottone Spazzolato
1	0	Stainless Steel / Inox
1	3	Black Brushed Stainless Steel / Inox Nero Spazzolato
1	4	Brushed Chrome / Cromo Spazzolato
1	5	Natural Brass / Ottone Naturale
1	8	Matt Gold / Oro Opaco
1	9	Polished Gold / Oro Lucido
2	0	Magic Blue
2	6	Total Black / Nero Totale
2	7	Gravity Black
2	8	Polished Black Chrome/ Cromo Nero Lucido
2	9	Brushed Bronze / Bronzo Spazzolato
3	0	Grey Blue
3	1	Black Red
3	2	Copper Oxide
3	3	Black Green
3	4	Matt White - Black Bicolour / Bianco - Nero Opaco Bicolore
3	5	Grey Green
3	6	Brushed Black / Nero Spazzolato
3	7	Copper Brown
3	8	Blasted Inox / Inox Pallinato
3	9	Matt White - Polished Gold / Bianco Opaco - Oro Lucido
4	0	Grey Beige
4	1	Umbra Grey
4	9	Matt Black - Polished Gold / Nero Opaco - Oro Lucido

Colour temperature / Temperatura di colore

0	0	Light source not included / Sorgente non inclusa
2	2	2200K
2	7	2700K
3	0	3000K
9	6	2700K / 6500K (Tunable White)
9	8	RGBW (Warm White)
9	9	RGB

*Excluding tracks and profiles / Esclusi binari e profili.

Electrification / Elettrificazione

0	0	ON/OFF
0	1	DALI
0	2	TRIAC/IGBT
0	3	1-10V
0	4	PUSH
0	5	DIM (DALI - PUSH - 1-10V - TRIAC)
0	6	Dimmer on board
0	7	DALI - PUSH - 1-10V
2	0	CLASS III
4	0	ENDLESS
4	1	ENDLESS CASAMBI

The Davide Groppi handbook is a confidential document and cannot be disclosed.
In this document the drawings and technical information are to be considered indicative.
All product features and technical measurements are available on our website
davidegroppi.com

Il manuale tecnico Davide Groppi è un documento riservato e non può essere divulgato.
In questo documento i disegni e le informazioni tecniche sono da ritenersi indicative.
Tutte le caratteristiche di prodotto e le misure tecniche sono disponibili sul nostro sito
davidegroppi.com

GUIDELINE TO PROPERLY READ THE CATALOGUE / GUIDA ALLA LETTURA DEL CATALOGO

General data on the product
Informazioni generali sul prodotto

Mounting - Lighting - Use - Material - Finish - Note

Model specifications
Specifiche modello

Technical data - Certifications - Codes

NULLA		Davide Groppi / 2010	
Recessed / Direct / Indoor			
Material	Metal		
Finish	.00 Standard		
Note	Recessed luminaire. Visible 18/25 mm diameter hole. NULLA 18 and NULLA 25: lamp extractable for maintenance. Apparecchio illuminante da incasso. Foro visibile con diametro da 18/25 mm. NULLA 18 e NULLA 25: apparecchio estraibile per manutenzione.		
	NULLA - 23° 14W 24V DC 2700K - 425lm / 3000K - 458lm CRI >90 Beam 23° UGR <19 Driver not included CE 		
	Standard - 2700K	1A4100000.27.20	
	Standard - 3000K	1A4100000.30.20	
	NULLA - 32° 14W 24V DC 2700K - 538lm / 3000K - 579lm CRI >90 Beam 32° UGR <19 Driver not included CE 		
	Standard - 2700K	1A2110000.27.20	
	Standard - 3000K	1A2110000.30.20	

398

Compulsory and optional accessories
Accessori obbligatori e accessori opzionali

Accessories finishes and specifications - Codes

Reference model
Modello di riferimento

NULLA

Davide Groppi / 2010

Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione

Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm

Not included

Matt Black
 Cut-out Ø 21 mm
 Minimum space for mounting 100 mm
 IP65

NULLA 1A2200400.00.00

Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm

Not included

Matt Black
 Cut-out Ø 22 mm
 Minimum space for mounting 190 mm

NULLA 18 1A2210400.00.00

Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm

Not included

Matt Black
 Cut-out Ø 35 mm
 Minimum space for mounting 190 mm

NULLA 25 1A2170400.00.00

Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm

Not included

Matt Black
 Cut-out Ø 35 mm
 Minimum space for mounting 190 mm
 IP65

NULLA 25 1A3980400.00.00

Plasterboard flange (bottom) = 12,5 mm / Flangia (da sotto) per cartongesso = 12,5 mm

Not included

Matt Black
 Cut-out Ø 35 mm
 Minimum space for mounting 190 mm
 IP65

NULLA 25 1A4960400.00.00

Drivers / Alimentatori

Driver / Alimentatore

Not included

220-240V(100-127V) 24V/16W(15W)IP20/DALI

120241180.24

Driver / Alimentatore

Not included

220-240V(100-127V) 24V/20W(15W)IP20/PUSH

120240870.24

Driver / Alimentatore

Not included

220-240V 24V/20W/IP20/TRIAC/IGBT

120240850.24

PICTOGRAPHY / SIMBOLOGIA

 **Class II luminaire:** luminaire whose protection against electric shock is not only relevant to the main insulation, but also includes additional safety measures, such as dual insulation or reinforced insulation. These measures do not include ground devices as protection and do not depend on the installation conditions.

 **Class III luminaire:** luminaire whose safety against electric shock is based on safe extra low voltage power supply. Compliance with legislation is guaranteed only if the luminaire is powered by a SELV safety transformer/driver in compliance with legislation in force. The luminaire must not be connected to ground conductors.

 Degree of protection against access of foreign bodies, dust and water.

 Luminaire with this symbol can only use low pressure bulbs or bulbs with safety glass.

 Do not use cold light lamps.

 To prevent the risk of fire, maintain the minimum distance indicated from the bulb with lighting objects. This distance should be measured along the optical axis of the luminaire to the closest lighting object.

CRI **Color Rendering Index:** the degree of colour distortion under a given light source in comparison with a reference light source. The optimum colour rendition index is Ra=100.

lm The luminous flux, measured in lumen, indicates the quantity of light perceived by the human eye emitted by a light source. In Davide Groppi lights with an integrated module, the delivered lumen flux is obtained from the photometric measurement. In lights with a lightbulb included, the luminous flux is indicated provided by the manufacturer of the lightbulb.

Apparecchio in classe II: apparecchio in cui la protezione contro le scariche elettriche non interessa solamente l'isolamento principale, bensì comprende misure di sicurezza supplementari, come il doppio isolamento o l'isolamento rinforzato. Tali misure non comprendono mezzi di messa a terra come protezione e non dipendono dalle condizioni di installazione.

Apparecchio in classe III: apparecchio in cui la sicurezza contro la scossa elettrica si basa sull'alimentazione a bassissima tensione di sicurezza. La conformità alla normativa è garantita solo se l'apparecchio è alimentato da un trasformatore/driver di sicurezza SELV conforme alla normativa in vigore. L'apparecchio non deve essere collegato a conduttori di messa a terra.

Livello di protezione contro l'accesso di corpi estranei, polvere e acqua.

Apparecchio che può utilizzare solamente lampadine a bassa pressione o con vetro di protezione.

Non utilizzare lampade a luce fredda.

Per prevenire il rischio di incendio, mantenere come minimo la distanza indicata dalla lampadina agli oggetti illuminati. Tale distanza va misurata lungo l'asse ottico dell'apparecchio all'oggetto illuminato più vicino.

Color Rendering Index: grado di alterazione dei colori sotto una data illuminazione in confronto ad una sorgente luminosa di riferimento. L'indice ottimale di resa cromatica Ra è pari a 100.

Il flusso luminoso, misurato in lumen, indica la quantità di luce percepita dall'occhio umano emessa da una sorgente luminosa. Nelle lampade Davide Groppi con modulo integrato è indicato il reale flusso luminoso ricavato dal rilievo fotometrico. Nelle lampade in cui è inclusa una lampadina è indicato il flusso luminoso fornito dal fabbricante della lampadina stessa.

PICTOGRAPHY / SIMBOLOGIA

 Luminaire designed to be powered by ENDLESS conductive tape.

 Luminaire integrated with Casambi, the Bluetooth Low Energy (BLE) technology for lighting control.

 Luminaire with Extradark comfort system. The Extradark system associates an optical TIR PMMA lens to an element that geometrically shields the light beam viewing angle to obtain highly uniform lighting and full beam control. The polished black light shield is used to control the mirror reflection of the light, perfectly controlling the unified glare rating (UGR* <19).

Apparecchio predisposto per essere alimentato dal tape conduttivo ENDLESS.

Apparecchio in cui è integrata la tecnologia Bluetooth Low Energy (BLE), per il controllo dell'illuminazione, Casambi.

Apparecchio dotato di Extradark comfort system. Il sistema Extradark è l'unione di un'ottica TIR in PMMA ottico a un elemento che scherma geometricamente l'angolo di visione del fascio luminoso ottenendo un'elevata uniformità di illuminamento e il pieno controllo dell'emissione. L'elemento ottico schermante, con finitura nero lucido, permette di controllare la riflessione speculare della luce e quindi di controllare in maniera perfetta l'indice di abbagliamento (UGR* <19).

*Unified Glare Rating

All Davide Groppi products, except those specifically indicated,
are equipped with electronic light sources (LED).
The selection of diodes is carried out with the utmost care to guarantee
the highest levels of performance and luminous uniformity.

Tutti i prodotti Davide Groppi, salvo quelli specificamente indicati,
sono equipaggiati con fonti luminose elettroniche (LED).
La selezione dei diodi è eseguita con la massima cura per garantire
i più alti livelli di prestazione e di uniformità luminosa.

WIRELESS / SENZA FILO



35MM

Alessandra Dallagiovanna - Davide Groppi / 2009

Those dear old slides. Nobody pays any attention to them anymore.

It's the smallest lamp in our collection.

It's an idea, a thought, a pendant, something you can wear.

The pulsating light and the images you choose to display on it
make 35MM unique and exceptional.

La vecchia, cara diapositiva. Purtroppo ormai in disuso.

È la più piccola lampada della nostra collezione.

È un'idea, un pensiero, un ciondolo, luce da indossare.

La luce pulsante e le immagini personalizzabili
rendono 35MM un progetto unico ed eccezionale.

35MM


Alessandra Dallagiovanna - Davide Groppi / 2009

Objects / Diffuse / Wireless

Material Metal - Polycarbonate
Finish .00 Standard

Note Battery-operated wearable luminaire. Matt white front. Glossy black back. Customised image not included. Intermittent light.


Apparecchio illuminante da indossare a batteria. Fronte bianco opaco. Retro nero lucido. Immagine personalizzabile non inclusa. Luce intermittente.



35MM
0,3W
ON/OFF
Batteries 2xCR2032 included
CE IP20

Standard - ON/OFF

| 1A2640000.00.00 |

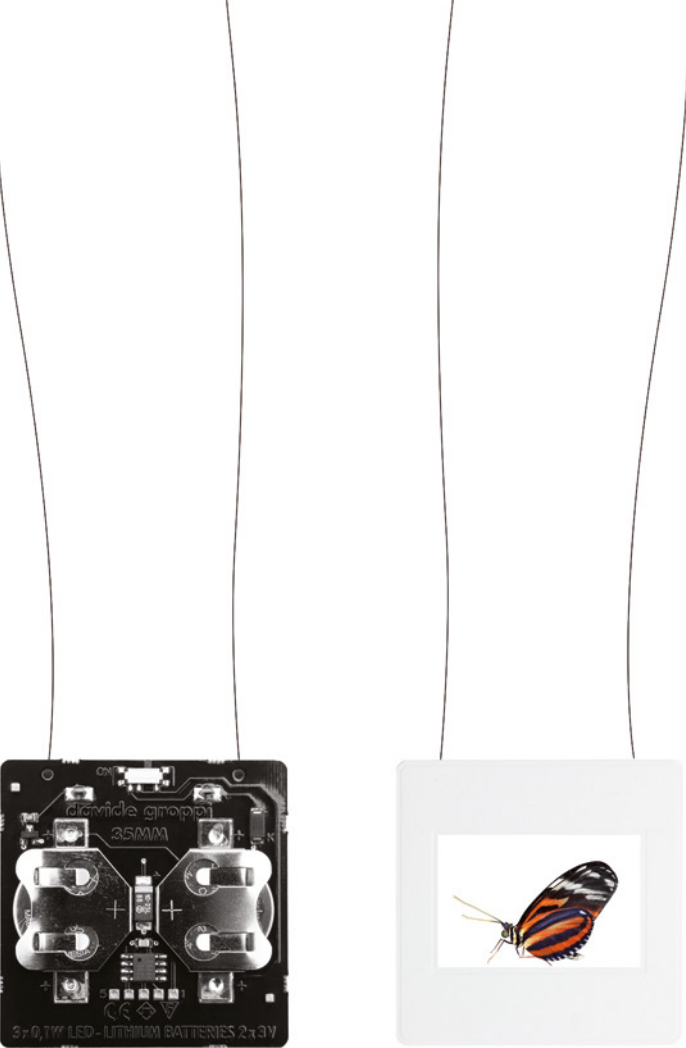



BUGIA

Davide Groppi / 2018

A lightweight and soft light.

A lamp designed to enjoy wonderful diffuse light but without an electrical cable.

Una luce morbida e leggera.

Una lampada pensata per godere di una meravigliosa luce diffusa
senza il vincolo del cavo elettrico.

BUGIA

Davide Groppi / 2018

Table / Diffuse / Wireless

Material

Metal - Methacrylate


Finish

.18 Matt Gold

Note

Rechargeable table luminaire. Matt white diffuser. Gold finish base. Battery life: 9 hours.

Apparecchio illuminante da tavolo a batteria ricaricabile. Diffusore bianco opaco. Base verniciata dorata. Autonomia della batteria: 9 ore.



BUGIA

2W

3000K - 120lm

CRI >90

Driver with plug not included

USB cable included

ON/OFF


CE IP20

Matt Gold - 3000K - ON/OFF

1A2351800.30.00

Optional accessories / Accessori opzionali

Drivers / Alimentatori



Driver with plug / Alimentatore con spina

Not included

Matt Black

Input 110-240V - 50/60Hz

Output 5V DC - 2A - 10W - IP20

1Z0000088

Other accessories / Altri accessori



USB to USB-C cable / Cavo da USB a USB-C

Included

Matt Black

Length 1 m

1Z0000132







Light*Music*Wireless

Created to give you both light and music any place, at any time.

PoPuP accompanies you during your unforgettable moments.

The sounds it produces are dynamic and of excellent quality.

Light and sound can also be enjoyed separately.

Listen to the light.

Light*Music*Wireless

Ideata per ottenere luce e musica in qualsiasi luogo ed in qualunque momento.

PoPuP permette di vivere un'esperienza musicale emozionante

grazie ad un suono ampio e dinamico.


Luce e suono sono utilizzabili separatamente.

Ascolta la luce.

Table / Direct / Wireless

Material Metal - Methacrylate
Finish .03 Matt White

Note Rechargeable table luminaire and speaker. Magnetic fixing stem. *Apparecchio illuminante e diffusore audio da tavolo a batteria ricaricabile. Battery life: 12 hours light only and 30 hours audio only at medium volume. Stelo con fissaggio magnetico. Autonomia della batteria: 12 ore solo luce e 30 ore solo audio a medio volume.*




PoPuP
2W
3000K - 183lm
CRI >80
Driver with plug included
ON/OFF
5W Audio - 50-20000Hz
CE IP20

Matt White - 3000K - ON/OFF

1A2610300.30.00


Optional accessories / Accessori opzionali

Drivers / Alimentatori



Driver with plug / Alimentatore con spina			Included
Matt Black	Input 110-240V - 50/60Hz Output 10000mAh - 4,2-14V DC 18W - IP20	1Z1530030	

Other accessories / Altri accessori



Rechargeable battery / Batteria ricaricabile			Included
Matt White	12V DC - NiMH 3700mAh Battery life 12 hours light only and 30 hours audio only at medium volume	1A2620300.00.00	







POST PRANDIUM

Davide Groppi / 2023


During a meal with friends, a ladle is reused to scoop up the light
and serve it onto the table.
A project from many years ago, today in a new wireless version.
Archiproducts Design Award 2023

Durante una cena tra amici, un mestolo è ri-utilizzato
per raccogliere la luce e servirla al tavolo.
Un progetto di molti anni fa, oggi rieditato in versione wireless.
Archiproducts Design Award 2023


POST PRANDIUM

Davide Groppi / 2023

Table / Direct / Wireless		
Material	Metal - Methacrylate	
Finish	.01 Polished Chrome	
Note	Rechargeable table luminaire. Details with polished gold finish. Matt black base. Battery life: 9 hours.	Apparecchio illuminante da tavolo a batteria ricaricabile. Dettagli con finitura oro lucido. Base nero opaco. Autonomia della batteria: 9 ore.

	POST PRANDIUM 2W 3000K - 171lm CRI >90 Driver with plug not included USB cable included ON/OFF CE IP20	Polished Chrome - 3000K - ON/OFF 1A4550100.30.00
---	---	--

Optional accessories / Accessori opzionali

Drivers / Alimentatori			
	Driver with plug / Alimentatore con spina		Not included
	Matt Black	Input 110-240V - 50/60Hz	1Z0000088
		Output 5V DC - 2A - 10W - IP20	
Other accessories / Altri accessori			
	USB to USB-C cable / Cavo da USB a USB-C		Included
	Matt Black	Length 1 m	1Z0000132





Al Gatto Verde Restaurant
Modena





QuiQuoQua

Davide Groppi / 2017

The light where you want it.

A unique suspension lamp with a rechargeable battery. The light source is applied magnetically to a metal dish that hangs from the ceiling using a very thin steel wire. The effect is delicately elegant. QuiQuoQua takes light where it is needed, without the limitation of electric wires.

La luce dove vuoi.

Un'inedita lampada a sospensione a batteria ricaricabile. La parte ottica è applicata magneticamente ad una parabola e sospesa attraverso un sottilissimo cavo in acciaio. L'effetto è delicatamente elegante. QuiQuoQua offre la possibilità di portare la luce dove si desidera senza il vincolo del cavo elettrico.

QuiQuoQua

Davide Groppi / 2017

Suspension / Direct / Wireless

Material

Metal - Methacrylate


Finish

.03 Matt White

Note

Rechargeable suspension luminaire. Magnetic fixing LED module. Matt white rose. AISI 304 stainless steel suspension cable. Battery life: 8 hours.

Apparecchio illuminante a sospensione a batteria ricaricabile. Modulo LED con fissaggio magnetico. Rosone bianco opaco. Cavo di sospensione in inox AISI 304. Autonomia della batteria: 8 ore.




QuiQuoQua	
5W	
3000K - 345lm	
CRI >80	
Driver with plug included	
ON/OFF	
CE  IP20	
Matt White - 3000K - ON/OFF	1A2630300.30.00

QuiQuoQua

Davide Groppi / 2017

Optional accessories / Accessori opzionali

LED modules / Moduli LED




LED module / Modulo LED		Included
Matt Black	5W - 3000K - 345lm - CRI >80	1A0570400.30.00
	Rechargeable lithium battery 9V DC	
	Li-Ion 5800mAh - Battery life 8 hours	

Suspension kits / Kit di sospensione



Sloped ceiling suspension kit / Kit di sospensione per soffitto inclinato		Not included
Nickel plated - 1 Piece		1A0510000.00.00

Drivers / Alimentatori



Driver with plug / Alimentatore con spina		Included
Matt Black	Input 110-240V - 50/60Hz	1Z1120710
	Output 9V DC - 3A - 30W - IP20	






A timeless icon with an eye on the future.
Portable and rechargeable, the greatest expression of freedom.
With TeTaTeT, every table becomes a meeting place, a complete dining experience.
Its light caresses those it illuminates with pure emotion.
Equipped with Touch technology and a magnetic fixing base.
Mention of Honour XXIV Compasso d'Oro ADI 2016

Un'icona senza tempo, con lo sguardo rivolto al futuro.
Portatile e ricaricabile, la massima espressione della libertà.
Grazie a TeTaTeT, ogni tavola diventa un luogo d'incontro, ogni cena un'emozione.
La sua luce accarezza i volti e amplifica le sensazioni.
Dotata di accensione touch, il fissaggio alla base è magnetico.
Menzione d'Onore XXIV Compasso d'Oro ADI 2016




Table / Direct / Wireless				
Material	ABS - Metal - Methacrylate			
Finish	.03	Matt White	.18	Matt Gold
	.31	Black Red	.33	Black Green
			.27	Gravity Black
			.35	Grey Green
			.30	Grey Blue
			.40	Grey Beige
Note	Rechargeable table luminaire. Magnetic fixing stem. Touch ON/OFF. Battery life: 12 hours.			
	Apparecchio illuminante da tavolo a batteria ricaricabile. Stelo con fissaggio magnetico. ON/OFF touch. Autonomia della batteria: 12 ore.			

	TeTaTeT 2W 2700K - 165lm / 3000K - 178lm CRI >90 Driver with plug included ON/OFF CE IP20	Matt White - 2700K - ON/OFF	1A0310300.27.00
		Matt White - 3000K - ON/OFF	1A0310300.30.00
		Matt Gold - 2700K - ON/OFF	1A0311800.27.00
		Matt Gold - 3000K - ON/OFF	1A0311800.30.00
		Gravity Black - 2700K - ON/OFF	1A0312700.27.00
		Gravity Black - 3000K - ON/OFF	1A0312700.30.00
		Grey Blue - 2700K - ON/OFF	1A0313000.27.00
		Grey Blue - 3000K - ON/OFF	1A0313000.30.00
		Black Red - 2700K - ON/OFF	1A0313100.27.00
		Black Red - 3000K - ON/OFF	1A0313100.30.00
		Black Green - 2700K - ON/OFF	1A0313300.27.00
		Black Green - 3000K - ON/OFF	1A0313300.30.00
		Grey Green - 2700K - ON/OFF	1A0313500.27.00
		Grey Green - 3000K - ON/OFF	1A0313500.30.00
		Grey Beige - 2700K - ON/OFF	1A0314000.27.00
		Grey Beige - 3000K - ON/OFF	1A0314000.30.00


Optional accessories / Accessori opzionali

Drivers / Alimentatori




Driver with plug / Alimentatore con spina			Included
Matt Black	Input 110-240V - 50/60Hz Output 6V DC - 1A - 6W - IP20	1Z0000073	


Other accessories / Altri accessori



Rechargeable battery / Batteria ricaricabile			Included
Matt White	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0430300.00.00	
Matt Gold	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0431800.00.00	
Gravity Black	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0432700.00.00	
Grey Blue	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0433000.00.00	
Black Red	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0433100.00.00	
Black Green	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0433300.00.00	
Grey Green	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0433500.00.00	
Grey Beige	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0434000.00.00	

Table / Tavolino			Not included
Matt White	1A4020300.00.00		
Matt Black	1A4020400.00.00		



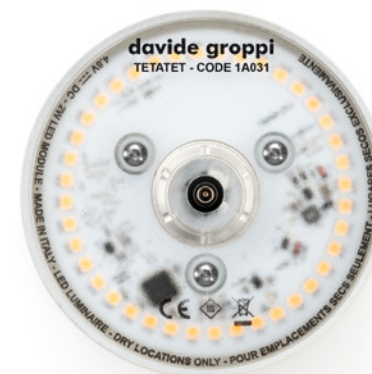



Matt White



Matt Gold



Gravity Black



Grey Blue




Black Red




Black Green



Grey Green

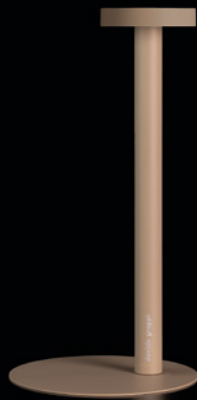

Grey Beige

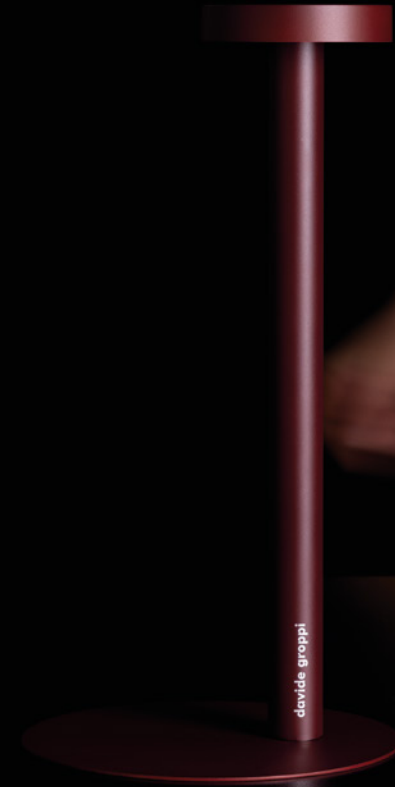

Hosteria in Certosa Restaurant
Venezia



Torre del Saracino Restaurant
Vico Equense







TeTaTeT Flûte

Davide Groppi / 2017

This is an evolution of our TeTaTeT lamp.
The lamp head is lightweight and appears to be floating in air.
The transparent stem brings to mind the glasses used in the classic "mise en place".
Magnetic fixing base.

L'evoluzione del nostro modello TeTaTeT.
La testa appare leggera e sospesa nel vuoto.
Lo stelo trasparente evoca i bicchieri utilizzati nelle classiche "mise en place".
Il fissaggio alla base è magnetico.

Table / Direct / Wireless				
Material	ABS - Metal - Methacrylate			
Finish	.03 Matt White			
Note	Rechargeable table luminaire. Magnetic fixing transparent stem. Magnetic LED module. Battery life: 9 hours.	stem.	Apparecchio illuminante da tavolo a batteria ricaricabile. Stelo trasparente con fissaggio magnetico. Modulo LED con fissaggio magnetico. Autonomia della batteria: 9 ore.	


	TeTaTeT Flûte			
	2W 2700K - 167lm / 3000K - 180lm CRI >90 Driver with plug not included USB cable included ON/OFF CE IP20		Matt White - 2700K - ON/OFF Matt White - 3000K - ON/OFF	1A2360300.27.00 1A2360300.30.00

Davide Groppi / 2017			
Optional accessories / Accessori opzionali			
Drivers / Alimentatori			
	Driver with plug / Alimentatore con spina		Not included
	Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

LED modules / Moduli LED			
	LED module / Modulo LED		Included
	Matt White	2W - 2700K - 167lm - CRI >90 Rechargeable lithium battery 5V DC Li-Ion 4800mAh - Battery life 9 hours	1A5360300.27.00
		2W - 3000K - 180lm - CRI >90 Rechargeable lithium battery 5V DC Li-Ion 4800mAh - Battery life 9 hours	1A5360300.30.00

Other accessories / Altri accessori			
	USB to USB-C cable / Cavo da USB a USB-C		Included
	Matt Black	Length 1 m	1Z0000132

Table / Tavolino			Not included
Matt White			1A4020300.00.00
Matt Black			1A4020400.00.00





Identità Golose Milano Restaurant
Milano

TeTaTeT Flûte





VIS À VIS

Michele Groppi / 2023



Vis à Vis is a magic trick, between technique and illusion.
Once again, we decided to take away, seeking only the light.
Transparency is the main feature of this battery-powered lamp.

German Design Award 2025

Elle Deco International Design Award 2024

Archiproducts Design Award 2023

Vis à Vis è un gioco di prestigio, tra la tecnica e l'illusione.
Abbiamo pensato, ancora una volta, di togliere, cercando solo la luce.
La trasparenza è la caratteristica principale di questa lampada a batteria.

German Design Award 2025


Premio Elle Deco International Design 2024

Archiproducts Design Award 2023

VIS À VIS

Michele Groppi / 2023

Table / Direct / Wireless		
Material	ABS - Methacrylate	
Finish	.00 Standard	
Note	Rechargeable table luminaire. Transparent disc with refractive effect.	Apparecchio illuminante da tavolo a batteria ricaricabile. Disco trasparente con effetto rifrattivo.
	Magnetic fixing LED module and transparent stem. Battery life: 9 hours.	Stelo trasparente e modulo LED con fissaggio magnetico. Autonomia della batteria: 9 ore.

	VIS À VIS		
	2W 2700K - 110lm / 3000K - 113lm CRI >90 Driver with plug not included USB cable included ON/OFF CE IP20	Standard - 2700K - ON/OFF Standard - 3000K - ON/OFF	1A4530000.27.00 1A4530000.30.00

Optional accessories / Accessori opzionali

Drivers / Alimentatori



Driver with plug / Alimentatore con spina		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

LED modules / Moduli LED



LED module / Modulo LED		Included
Standard	2W - 2700K - 110lm - CRI >90 Rechargeable lithium battery 5V DC Li-Ion 4800mAh - Battery life 9 hours	1A5370000.27.00
	2W - 3000K - 113lm - CRI >90 Rechargeable lithium battery 5V DC Li-Ion 4800mAh - Battery life 9 hours	1A5370000.30.00

Other accessories / Altri accessori



USB to USB-C cable / Cavo da USB a USB-C		Included
Matt Black	Length 1 m	1Z0000132



Mies van der Rohe Pavilion
Barcelona





TABLE / TAVOLO



ABA

Omar Carraglia / 2007

Inspired by the shape of a traditional lampshade.
The bulb is not shielded but displayed, and it peeks out from the shade.

Ispirata alla forma di un'abat-jour tradizionale.
La lampadina non è schermata, ma esibita, e fa capolino dal paralume.

ABA


Omar Carraglia / 2007

Table / Diffuse / Indoor

Material	Metal - Methacrylate
Finish	.03 Matt White

Note Table lumineaire. Dimmer on the cable. White cable.

Apparecchio illuminante da tavolo. Dimmer lungo il cavo. Cavo bianco.



ABA

Max 10W - E27
100-240V - 50/60Hz
Dimmer on board
Bulb not included
CE IP20 0.5 m

Matt White - Dimmer on board

1A2700300.00.06

Optional accessories / Accessori opzionali

Bulbs / Lampadine



LED - E27 - G125

220-240V - 7W - 360°
2700K - 806lm - CRI >80
Energy Efficiency E - Dimmable

1Y2080010

Not included





ANIMA

Davide Groppi - Giorgio Rava / 2021

A slender, light, ephemeral and abstract sculpture, it is a weightless ideogram.
It's the emotion of an indirect light with an aesthetic poised between Scandinavian and Japanese design, two apparently distant cultures but, actually, very close.
At the top, an open circle, almost a hook for fishermen of the soul.

XXVIII Compasso d'Oro ADI Award 2024

AZ Award 2022

Archiproducts Design Award 2021

Sculptura filiforme, leggera, effimera, astratta, è un ideogramma senza peso.
È l'emozione di una luce indiretta con un'estetica in bilico tra la Scandinavia e il Giappone, due culture apparentemente lontane, ma in realtà molto vicine tra loro.
In cima, un cerchio non chiuso, quasi un amo per pescatori d'anime.

XXVIII Premio Compasso d'Oro ADI 2024

Premio AZ Award 2022

Premio Archiproducts Design Award 2021




Compasso d'Oro ADI
Award 2024

ANIMA

Davide Groppi - Giorgio Rava / 2021

Table-Floor / Indirect / Indoor

Material	ABS - Carbon fiber - Metal		
Finish	.04 Matt Black		
Note	Table luminaire. Touch ON/OFF and adjustment. Black cable.		
	Apparecchio illuminante da tavolo. ON/OFF e regolazione touch. Cavo nero.		




ANIMA 4W 5V DC 2700K - 575lm / 3000K - 589lm CRI >80 Driver with plug not included USB cable included Dimmer on board CE IP20	Matt Black - 2700K - Dimmer on board Matt Black - 3000K - Dimmer on board	1A1090400.27.06 1A1090400.30.06
--	--	------------------------------------

Optional accessories / Accessori opzionali

Drivers / Alimentatori



Other accessories / Altri accessori










CALVINO

Davide Groppi / 2018


Full and empty, shadow and light.
A circular mirror to be positioned as you please,
to both light and capture the surrounding space.
Born Series Award 2019

Pieni e vuoti, ombra e luce.
Uno specchio circolare può essere orientato a piacimento
per illuminare e nello stesso tempo cogliere lo spazio circostante.
Premio Born Series Award 2019

Table / Indirect / Indoor		
Material	Brass - Metal - Methacrylate - Mirror	
Finish	.00 Standard	
Note	Table luminaire. Disc with mirror finish adjustable in all directions.	Apparecchio illuminante da tavolo. Disco con finitura a specchio
	Matt blue rear disc. Matt black base. Brass stem. Dimmer on the cable.	orientabile in tutte le direzioni. Retro del disco blu opaco. Base nero opaco. Stelo in ottone. Dimmer lungo il cavo. Cavo nero.
Black cable.		

	CALVINO	
	11W	
	24V DC	
	2700K - 1275lm / 3000K - 1372lm	
	CRI >90	
	Driver with plug included	
	Dimmer on board	
	CE IP20	
	Standard - 2700K - Dimmer on board	1A2710000.27.06
	Standard - 3000K - Dimmer on board	1A2710000.30.06

Optional accessories / Accessori opzionali

Drivers / Alimentatori		
	Driver with plug / Alimentatore con spina	Included
	Matt Black	Input 110-240V - 50/60Hz Output 24V DC - 18W - IP20 1Z0431020





An antenna of light.

Antennas are mysterious, absolute and intrinsically beautiful,
because their essentialness expresses nothing more than their function.

A performing, adjustable and extremely comfortable light.

Mention of Honour XXVIII Compasso d'Oro ADI 2024

Archiproducts Design Award 2022

Un'antenna di luce.

Le antenne sono misteriose, assolute e intrinsecamente belle perché esprimono,
con la loro essenzialità, null'altro che la loro funzione.

Una luce prestante, orientabile ed estremamente confortevole.

Menzione d'Onore XXVIII Compasso d'Oro ADI 2024


Archiproducts Design Award 2022



FM

Davide Groppi / 2022

Table / Direct / Indoor		
Material	Carbon fiber - Metal	
Finish	.04 Matt Black	
Note	Table luminaire. Adjustable along the vertical axis. ON/OFF and push control. Black cable.	Apparecchio illuminante da tavolo. Orientabile lungo l'asse verticale. ON/OFF e regolazione push. Cavo nero.


	FM 1,5W 5V DC 2700K - 154lm / 3000K - 179lm CRI >90 UGR <19 Driver with plug not included USB cable included Dimmer on board CE IP20	Matt Black - 2700K - Dimmer on board Matt Black - 3000K - Dimmer on board	1A2440400.27.06 1A2440400.30.06
---	--	---	---

Optional accessories / Accessori opzionali

Drivers / Alimentatori

	Driver with plug / Alimentatore con spina Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20 1Z0000088

Other accessories / Altri accessori

	USB to USB-C cable / Cavo da USB a USB-C Included
Matt Black	Length 1 m 1Z0000132
	Power bank Not included
	10000mAh/36Wh Output 5V DC Battery life 10 hours 1A1990000.00.00





Private Residence
Amsterdam

MOON T

Davide Groppi / 2019



Moon was created from the dream of bringing the moon inside your own home.
The hand-made Japanese paper surface makes every lamp unique.
Suspension and floor versions also available.

Moon nasce da un sogno, quello di portare la luna dentro casa.
La superficie di carta giapponese, fatta a mano, rende unico ogni pezzo.
Disponibile anche nelle versioni a sospensione e da terra.

Table / Diffuse / Indoor		
Material	Japanese paper - Metal - PE	
Finish	.00 Standard	
Note	Table luminaire. PE and Japanese paper shade. Gold finish base. Dimmer on the cable. White cable. Compulsory moisture barrier bag packaging for air and sea shipping. A deliberate feature of MOON design is the creased, glued and overlapping effect of the paper. The used material is sensitive to humidity. This product is not suitable for use in high humidity environments.	
	Apparecchio illuminante da tavolo. Paralume in PE e carta giapponese. Base verniciata dorata. Dimmer lungo il cavo. Cavo bianco. Sacco barriera obbligatorio per spedizioni aerea e via nave. Una caratteristica voluta del design di MOON è l'effetto stropicciato, incollato e sovrapposto della carta. Il materiale utilizzato è sensibile all'umidità. Questo prodotto non è adatto all'uso in ambienti ad alta umidità.	

	MOON T Max 15W - E27 100-240V - 50/60Hz Dimmer on board Bulb not included CE □ IP20	
	Standard - Dimmer on board	1A2690000.00.06
Optional accessories / Accessori opzionali		
	Bulbs / Lampadine	
	LED - E27 - A60	Not included
	220-240V - 11,2W - 360° 2700K - 1521lm - CRI >90 Energy Efficiency D - Dimmable	1Y0330790
Other accessories / Altri accessori		
	Moisture barrier bag / Sacco barriera	Not included
	Packaging for air and sea shipping	4A2690010





A rigorous project in its design.

A dialogue between two essential, concrete and tangible materials: wood and glass.

Part frosted and part transparent, it moves feely on the base,
functioning both as diffuser and convex lens.

Un progetto dalle linee rigorose.

Un dialogo tra due materiali primari, concreti e tangibili: il legno e il vetro.

Satinata e in parte trasparente, si muove liberamente sulla base,
diventando a volte diffusore, a volte lente convessa.



PIGRECO

Omar Carraglia / 2019

Table / Diffuse / Indoor

Material

Glass - Oak wood


Finish

.00 Standard

Note

Table luminaire. Sanded glass ball. Oak wood base. Dimmer on the cable. Black cable.

Apparecchio illuminante da tavolo. Sfera in vetro sabbiato. Base in legno di rovere. Dimmer lungo il cavo. Cavo nero.



PIGRECO

6,5W

24V DC

3000K - 450lm

CRI >90

Driver with plug included


Dimmer on board

CE IP20

Standard - 3000K - Dimmer on board

1A2600000.30.06

Optional accessories / Accessori opzionali

Drivers / Alimentatori			Included
Driver with plug / Alimentatore con spina			
	Matt Black	Input 110-240V - 50/60Hz	1Z0431020
		Output 24V DC - 18W - IP20	





RIBBON

Maurici Ginés / 2024

The ribbon is a symbol of union and continuity.

The light reaches the table spontaneously,
almost as if a continuation of the electric cable.

Ribbon is the result of research into simple and intuitive graphic gestures.

A project that brings light to the table, in a certain formal sense.

Il nastro è un simbolo di unione e di continuità.

La luce arriva sul tavolo con spontaneità, quasi come prosecuzione del cavo elettrico.

Ribbon è il risultato della ricerca di un gesto grafico, semplice e intuitivo.

Un progetto per portare la luce sul tavolo, con un certo senso formale.

RIBBON

Table / Direct / Indoor

Material

Brass - Metal - Silicone


Finish

.04 Matt Black

Note

Table luminaire. Adjustable in all directions. Touch ON/OFF and adjustment. Black cable.

Maurici Ginés / 2024



RIBBON

6W

5V DC

2700K - 230lm / 3000K - 230lm

CRI >90

Driver with plug not included

USB cable included

Dimmer on board

CE IP20

Matt Black - 2700K - Dimmer on board	1A5850400.27.06
Matt Black - 3000K - Dimmer on board	1A5850400.30.06

Optional accessories / Accessori opzionali

Drivers / Alimentatori




Driver with plug / Alimentatore con spina			Not included
Matt Black	Input 110-240V - 50/60Hz	1Z0000088	
	Output 5V DC - 2A - 10W - IP20		

Other accessories / Altri accessori



USB to USB-C cable / Cavo da USB a USB-C			Included
Matt Black	Length 1 m	1Z0000132	



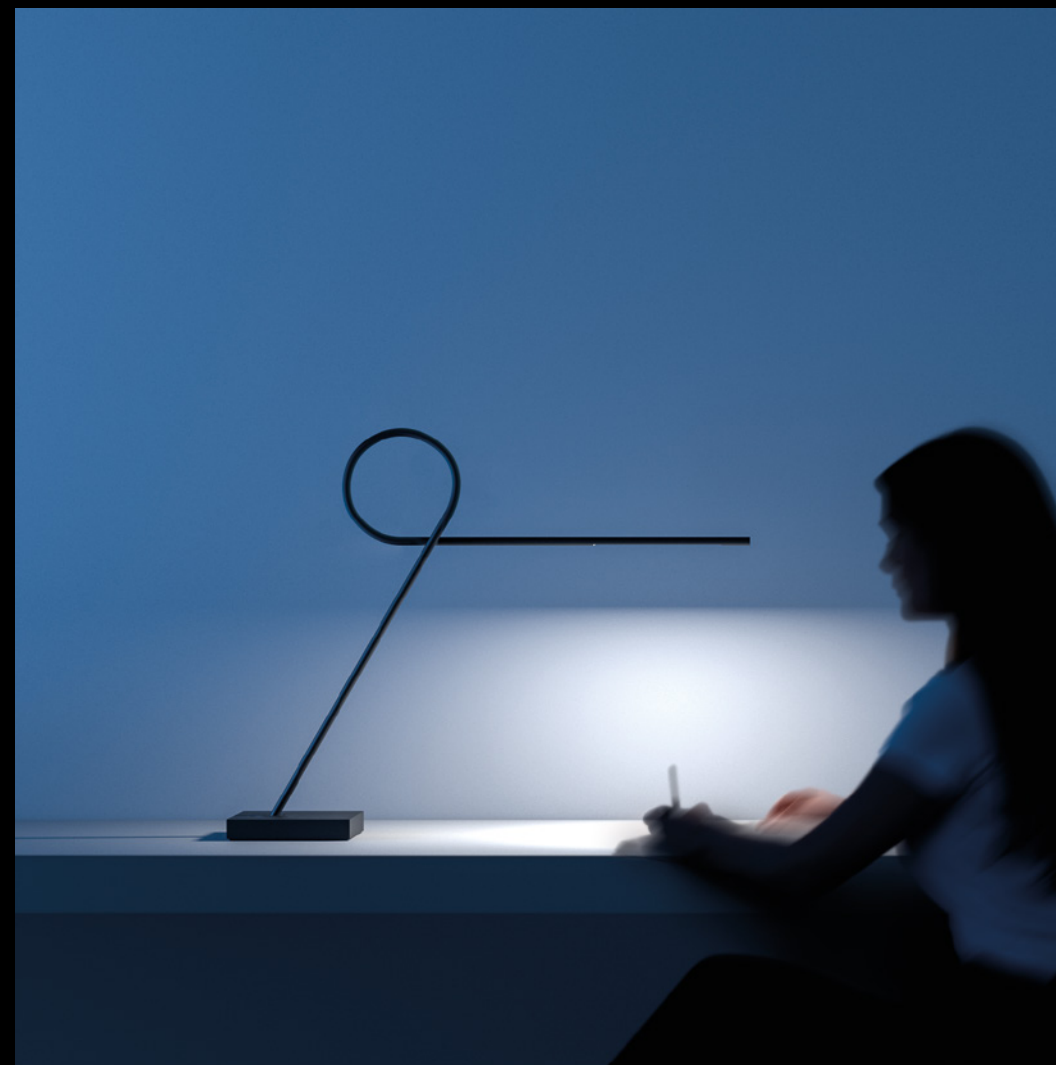

FLOOR / TERRA



BANNER

Mauro Ferrari / 2004

A solution that is part fixed and part mobile.
The lamp is fixed to the wall, but is powered by a cable and normal electrical plug.
Banner is one of our many solutions for bringing light where you need it,
with the greatest freedom.

Una soluzione fissa ma anche mobile.
La lampada è fissata a parete, ma viene alimentata attraverso un cavo
e una normale spina elettrica. Banner è una delle nostre tante soluzioni
per portare la luce dove si desidera con la massima libertà.

BANNER

Floor / Indirect / Indoor

Material

Metal - Polycarbonate

Finish

.03 Matt White

Note

Floor lamp with wall fixing. Connection cable not included.

Mauro Ferrari / 2004

Apparecchio illuminante da terra con fissaggio a parete. Cavo di connessione non incluso.

BANNER
90W
110-240V - 50/60Hz
2700K - 11083lm / 3000K - 11918lm
CRI >80
Driver integrated
DALI
CE IP20

Matt White - 2700K - DALI
Matt White - 3000K - DALI

1A1840300.27.01
1A1840300.30.01

BANNER
90W
110-240V - 50/60Hz
2700K - 11083lm / 3000K - 11918lm
CRI >80
Driver integrated
Dimmer on board
CE IP20

Matt White - 2700K - Dimmer on board
Matt White - 3000K - Dimmer on board

1A1840300.27.06
1A1840300.30.06

124

125



HASHI

Federico Delrosso / 2017


A floor lamp conceived to provide direct light in a simple and flexible manner. Its principle component is the pivot point between two “chopsticks” (Hashi) that serve as light sources which, positioned in different ways, create a strong, graphic effect in space. Particular care has been given to the proportions. The sticks always appear lightweight and balanced.

Lampada da terra pensata per fare luce d'accento con purezza e flessibilità. La componente fondamentale di progetto è lo snodo che, grazie alla sua energica tenacia, permette di posizionare le “bacchette” (Hashi) nello spazio in modo grafico e deciso. La particolare attenzione per le proporzioni rende il gesto molto libero, ma sempre equilibrato.

HASHI

Federico Delrosso / 2017

Floor / Direct / Indoor		
Material	Metal - Methacrylate	
Finish	.04 Matt Black	.18 Matt Gold
Note		
Floor luminaire. Adjustable along the vertical axis. Dimmer on the cable. <i>Apparecchio illuminante da terra. Orientabile lungo l'asse verticale. Dimmer lungo il cavo. Cavo nero.</i>		



HASHI
15,5W
110-240V - 50/60Hz
2700K - 765lm / 3000K - 823lm
CRI >90
UGR <19
Driver integrated
Dimmer on board
CE IP20

Matt Black - 2700K - Dimmer on board
Matt Black - 3000K - Dimmer on board
Matt Gold - 2700K - Dimmer on board
Matt Gold - 3000K - Dimmer on board

1A2510400.27.06
1A2510400.30.06
1A2511800.27.06
1A2511800.30.06








A tribute to Alberto Giacometti and to his thin fellows...
A lamp for lighting pictures, powered by an ordinary electrical socket.
The lamp has an adjustable light and it can be oriented.
The lamp section is reduced to a minimum.

Un omaggio ad Alberto Giacometti e alle sue figure sottili...
Una lampada per illuminare i quadri prendendo corrente da una normale presa elettrica.
La lampada è regolabile in altezza ed il flusso luminoso orientabile.
La sezione del corpo illuminante è ridotta ai minimi termini.

Floor-Suspension / Indirect / Indoor			
Material	Brass - Methacrylate		
Finish	.03 Matt White	.04 Matt Black	.08 Brushed Brass
Note	Floor luminaire with ceiling fixing. Adjustable along the vertical axis. Matt white rose. AISI 304 stainless steel suspension cable. Dimmer on the cable. Transparent cable. MASAI 2: version with power cable only and without driver.		
	<i>Apparecchio da terra con fissaggio a soffitto. Orientabile lungo l'asse verticale. Rosone bianco opaco. Cavo di sospensione in inox AISI 304. Dimmer lungo il cavo. Cavo trasparente. MASAI 2: versione con solo il cavo di alimentazione e senza driver.</i>		




MASAI 1

Driver with plug version
15,5W
110-240V - 50/60Hz
2700K - 600lm / 3000K - 619lm
CRI >90
Driver integrated
Dimmer on board

CE IP20

Matt White - 2700K - Dimmer on board
Matt White - 3000K - Dimmer on board
Matt Black - 2700K - Dimmer on board
Matt Black - 3000K - Dimmer on board
Brushed Brass - 2700K - Dimmer on board
Brushed Brass - 3000K - Dimmer on board

1A2720300.27.06
1A2720300.30.06
1A2720400.27.06
1A2720400.30.06
1A2720800.27.06
1A2720800.30.06



MASAI 2

Remote driver version
13W
24V DC - 50/60Hz
2700K - 600lm / 3000K - 619lm
CRI >90
Driver not included


CE IP20

Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K
Brushed Brass - 2700K
Brushed Brass - 3000K


1A2720300.27.20
1A2720300.30.20
1A2720400.27.20
1A2720400.30.20
1A2720800.27.20
1A2720800.30.20

Compulsory accessories / Accessori obbligatori


Drivers / Alimentatori



Driver / Alimentatore				Not included
220-240V(100-127V)	24V/16W(15W)/IP20/DALI	MASAI 2	1Z0241180.24	



Driver / Alimentatore				Not included
220-240V(100-127V)	24V/20W(15W)/IP20/PUSH - 1-10V	MASAI 2	1Z0240870.24	



Driver / Alimentatore				Not included
220-240V	24V/20W/IP20/TRIAC/IGBT	MASAI 2	1Z0240850.24	

Optional accessories / Accessori opzionali

Suspension kits / Kit di sospensione



Sloped ceiling suspension kit / Kit di sospensione per soffitto inclinato			Not included
Nickel plated - 1 Piece			1A0510000.00.00



Recessed suspension kit for 12,5 mm plasterboard / Kit di sospensione da incasso per cartongesso 12,5 mm			Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000300.03.00	
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000400.03.00	



Ceiling suspension kit / Kit di sospensione da soffitto			Not included
Matt White	For suspension cables - 1 Piece	1X0010300.03.00	
Matt Black	For suspension cables - 1 Piece	1X0010400.03.00	



Wall adapter plate / Piastra di adattamento da parete			Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00	




304 Stainless steel suspension cable / Cavo di sospensione in acciaio inox AISI 304			Not included
Lenght 10 m			1A1680000.00.00





Marconi Restaurant
Sasso Marconi

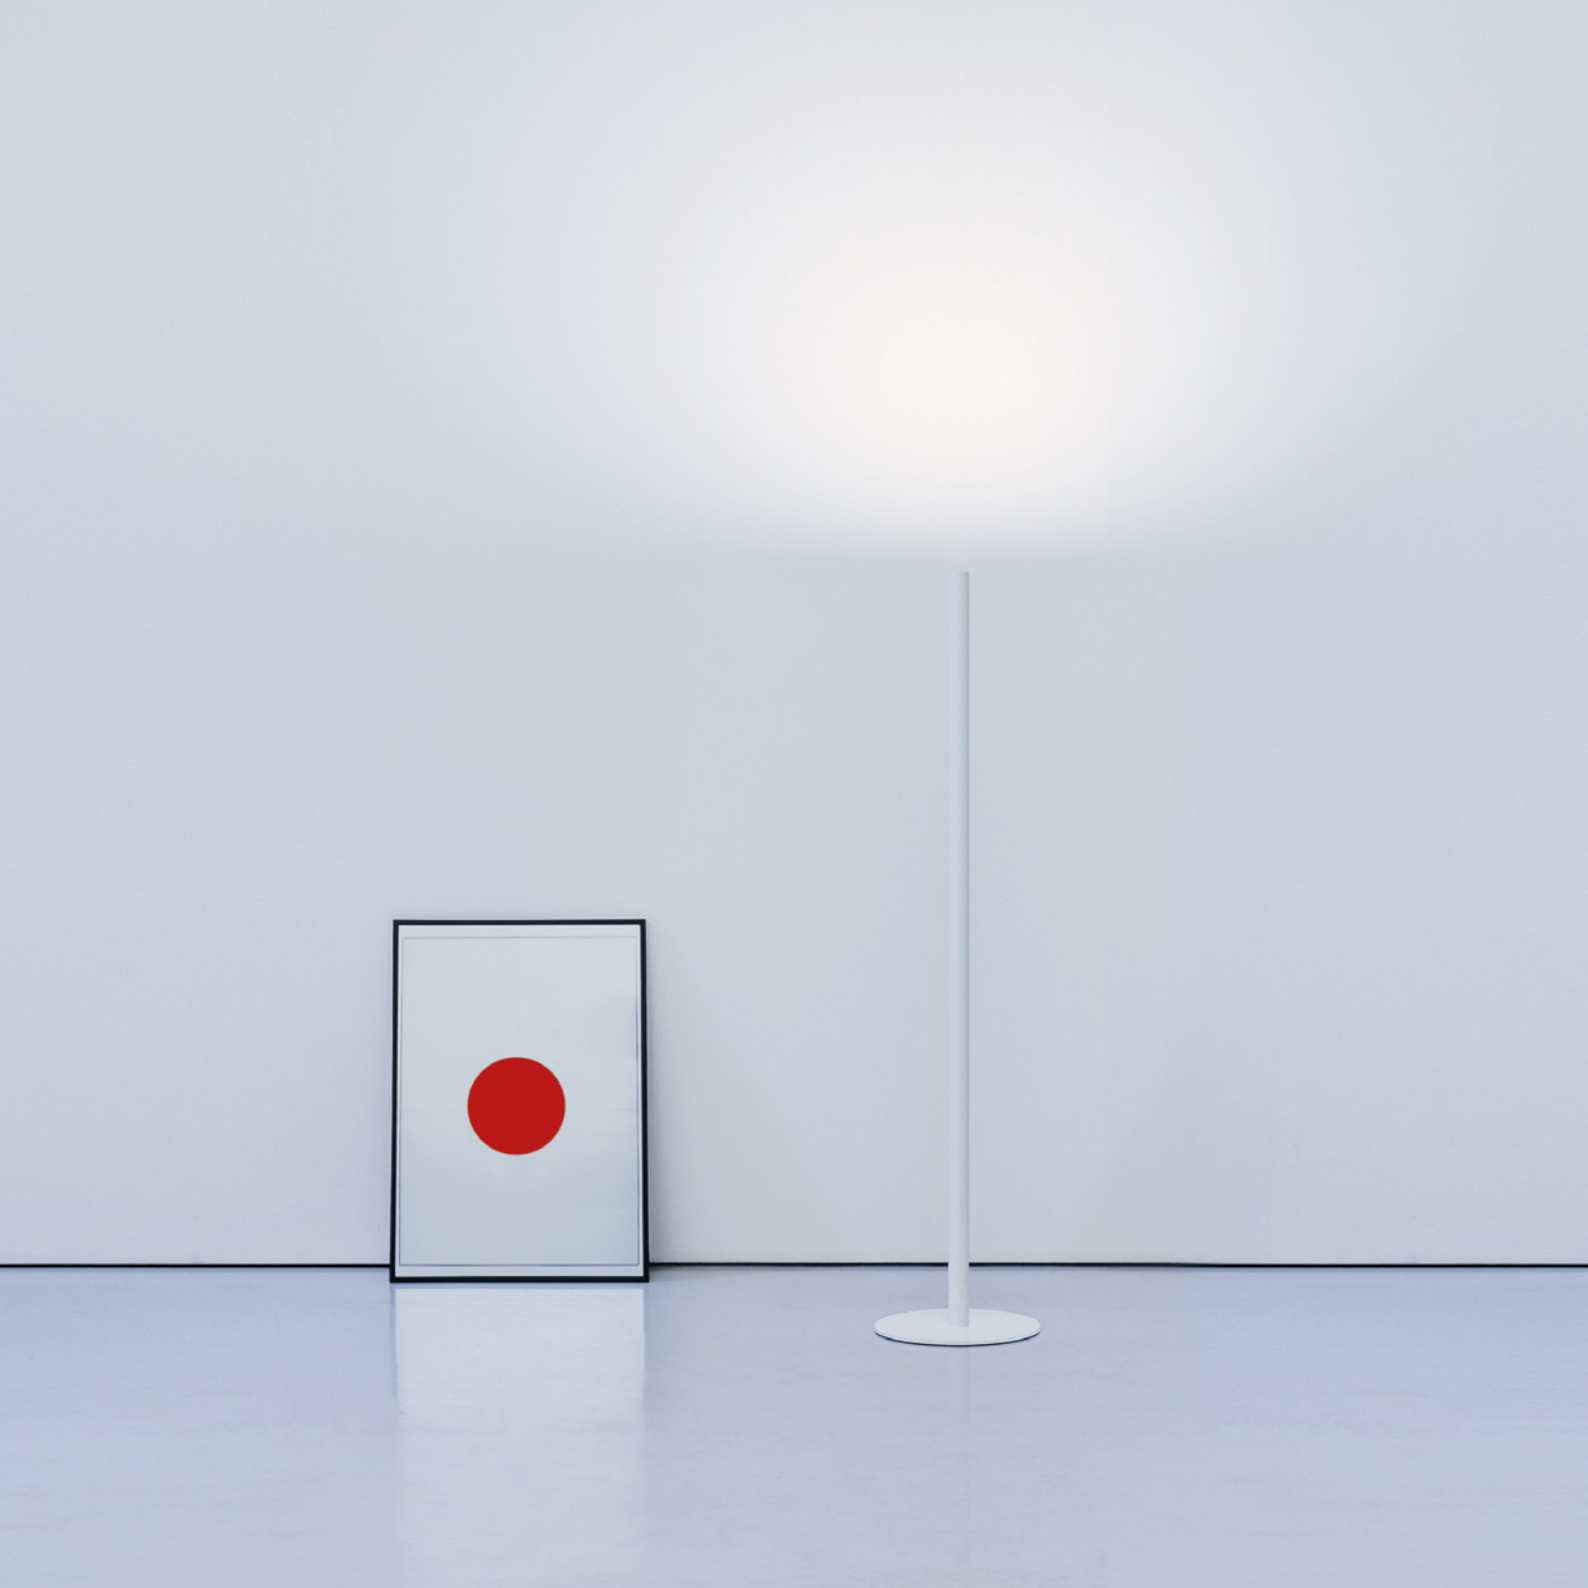

MISTER

Omar Carraglia / 2013

Portable light.

A floor tool to grant a wonderful indirect light in the purest possible way.

Luce mobile.

Un elemento da terra per garantire nel modo più puro possibile
una meravigliosa luce indiretta.

Floor / Indirect / Indoor		
Material	Metal - Methacrylate	
Finish	.03 Matt White	.04 Matt Black
Note		
Floor luminaire. Dimmer on the cable. White cable for the matt white finish, black cable for the matt black finish.		Apparecchio illuminante da terra. Dimmer lungo il cavo. Cavo bianco per la finitura bianco opaco e cavo nero per la finitura nero opaco.





MOON F

Davide Groppi / 2023

Moon was created from the dream of bringing the moon inside your own home.
The hand-made Japanese paper surface makes every lamp unique.
Suspension and table versions also available.

Moon nasce da un sogno, quello di portare la luna dentro casa.
La superficie di carta giapponese, fatta a mano, rende unico ogni pezzo.
Disponibile anche nelle versioni a sospensione e da tavolo.

MOON F

Floor / Diffuse / Indoor

Material

Japanese paper - PE



Finish

.00 Standard

Note

Floor luminaire. PE and Japanese paper shade. Matt white base. Dimmer on the cable. White cable. For air and sea shipping: moisture barrier bag packaging compulsory for all models and wooden crate compulsory for MOON 120 F model. A deliberate feature of MOON design is the creased, glued and overlapping effect of the paper. The used material is sensitive to humidity. This product is not suitable for use in high humidity environments.

Apparecchio illuminante da terra. Paralume in PE e carta giapponese. Base bianco opaco. Dimmer lungo il cavo. Cavo bianco. Per spedizioni aerea e via nave: sacco barriera obbligatorio per tutti i modelli e cassa in legno obbligatoria per il modello MOON 120 F. Una caratteristica voluta del design di MOON è l'effetto stropicciato, incollato e sovrapposto della carta. Il materiale utilizzato è sensibile all'umidità. Questo prodotto non è adatto all'uso in ambienti ad alta umidità.

	MOON 80 F Max 15W - E27 100-240V - 50/60Hz Dimmer on board Bulb not included CE IP20	Standard - Dimmer on board	1A4880000.00.06
	MOON 120 F Max 2x25W - E27 100-240V - 50/60Hz Dimmer on board Bulb not included CE IP20	Standard - Dimmer on board	1A4890000.00.06

MOON F

David

David Groppi / 2023

Optional accessories / Accessori opzionali

Bulbs / Lampadine



LED - E27 - A60

220-240V - 11,2W - 360°

2700K - 1521lm - CRI >90

Energy Efficiency D - Dimmable

MOON 80 F

1Y0330790

Not included



LED - E27 - A150

220-240V - 20W - 200°

2700K - 2452lm - CRI >80

Energy Efficiency E - Dimmable

MOON 120 F

1Y2160020

Not included

Other accessories / Altri accessori

Moisture barrier bag / Sacco barriera

Packaging for air and sea shipping

MOON 80 F

4A2840010

Not included

Moisture barrier bag / Sacco barriera

Packaging for air and sea shipping

MOON 120 F

49860020

Not included

Wooden crate / Cassa in legno

Packaging for air and sea shipping

MOON 120 F

49860010

Not included





MOVIE

Omar Carraglia / 2005


To “play” with the light.
A RGBW system lets you create all the light of the world.
To feel the light and to live it in all its spectrum.

Per giocare con i colori della luce.
Un sistema RGBW permette di creare tutta la luce del mondo.
Per sentire la luce e viverla in tutto il suo spettro.

MOVIE


Omar Carraglia / 2005

Floor / Indirect / Indoor		
Material	Metal - Polycarbonate	
Finish	.03 Matt White	.13 Black Brushed Stainless Steel
Note	Floor luminaire. RGBW wireless control. Black cable.	Apparecchio illuminante da terra. RGBW wireless control. Cavo nero.



MOVIE
80W
100-240V - 50/60Hz
2832lm
CRI >90
Driver integrated
Dimmer on board
RGBW wireless control
CE □ IP20

Matt White - RGBW - Dimmer on board	1A2740300.98.06
Black Brushed Stainless Steel - RGBW - Dimmer on board	1A2741300.98.06

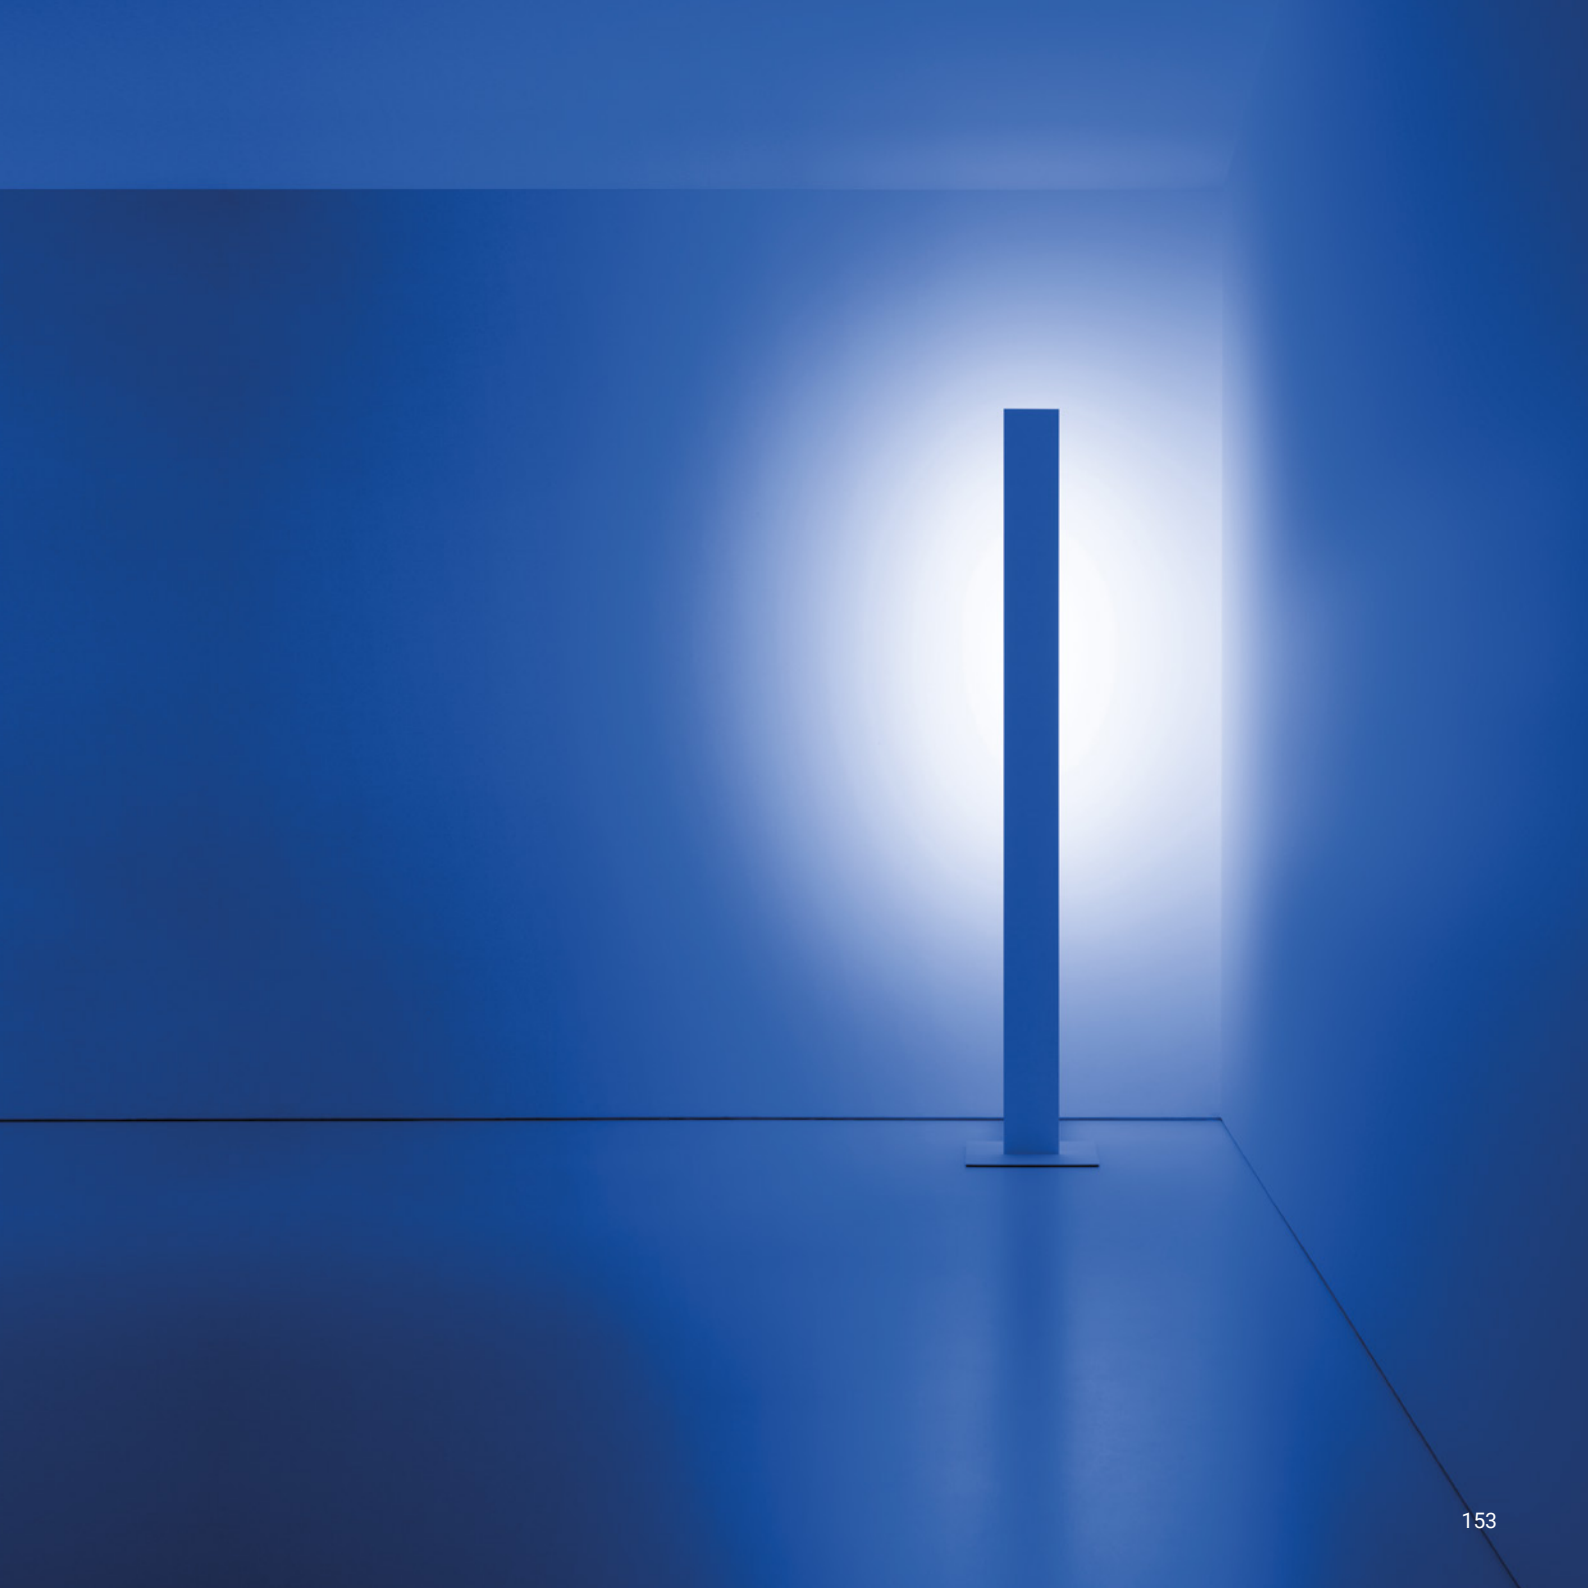



ORIGINE

Davide Groppi - Giorgio Rava / 2020


From the Latin “origo”, start, birth, source.
It appears like a bud emerging from the ground and soaring upwards towards the sky,
a stem that becomes increasingly thinner.
Mysterious and enigmatic, it combines the fascination of the unknown
with the pleasure of a sophisticated and elegant ambient light.
Origine sculpts and enhances every environment with its indirect light,
which is intentionally non-invasive, graphic and fascinating.
Available in 3 different heights and in an outdoor version.

**AZ Award 2021 and People's Choice
Archiproducts Design Award 2020**

Dal latino “origo”, inizio, nascita, fonte.
Evoca un germoglio che emerge dalla terra e si slancia verso il cielo,
lo stelo che diventa sempre più sottile.
Misteriosa ed enigmatica, unisce il fascino dell’incognito
al piacere di una luce d’ambiente sofisticata ed elegante.
Origine scolpisce e valorizza ogni ambiente con la sua luce indiretta,
volutamente non invasiva, grafica e affascinante.
Disponibile in 3 altezze differenti e nella versione outdoor.

**Premio AZ Award 2021 e People's Choice
Premio Archiproducts Design Award 2020**


Floor / Indirect / Indoor		
Material	Glass fiber - Metal	
Finish	.04 Matt Black	
Note	Floor luminaire. Dimmer on the cable. Black cable.	Apparecchio illuminante da terra. Dimmer lungo il cavo. Cavo nero.



ORIGINE 290
25W
24V DC
2700K - 1926lm / 3000K - 2075lm
CRI >80
Driver included
Dimmer on board
CE IP20

- Matt Black - 2700K - Dimmer on board
- Matt Black - 3000K - Dimmer on board


1A2300400.27.06
1A2300400.30.06



ORIGINE 390
30W
24V DC
2700K - 2843lm / 3000K - 3063lm
CRI >80
Driver included
Dimmer on board
CE IP20

- Matt Black - 2700K - Dimmer on board
- Matt Black - 3000K - Dimmer on board

1A2310400.27.06
1A2310400.30.06




ORIGINE 490
35W
24V DC
2700K - 3760lm / 3000K - 4051lm
CRI >80
Driver included
Dimmer on board
CE IP20

- Matt Black - 2700K - Dimmer on board
- Matt Black - 3000K - Dimmer on board

1A2320400.27.06
1A2320400.30.06







PABLO

Davide Groppi / 2015

The light is elevated to a work of art and contemplation.
A luminous panel without a frame leans against the wall as if waiting to be hung.
The colour and brightness can be controlled from the remote control.

La luce è elevata a oggetto d'arte e di contemplazione.
Un pannello luminoso senza cornice è appoggiato alla parete
come se aspettasse di essere appeso.
È possibile scegliere il colore e l'intensità della luce agendo sul telecomando.

PABLO

Floor / Diffuse / Indoor

Material

Metal - Methacrylate


Finish

.00 Standard

Note

Floor luminaire. Matt white diffuser. RGB wireless control. Transparent cable.

Apparecchio illuminante da terra. Diffusore bianco opaco. RGB wireless control. Cavo trasparente.



PABLO

60W

220-240V - 50/60Hz

Driver integrated

Dimmer on board

RGB wireless control

CE IP20

Standard - RGB - Dimmer on board

1A2730000.99.06






A piece of architecture to be used in space.
A concrete cube that allows you to understand volumes
and architecture in an unusual and unprecedented way.
Outdoor version also available.

Un pezzo di architettura da utilizzare nello spazio.
Un cubo realizzato in cemento che permette di interpretare i volumi
e le architetture in modo inconsueto e inedito.
Disponibile anche nella versione outdoor.

Q		Alberto Zattin / 2000	
Floor / Direct / Indoor			
Material	Cement - Metal		
Finish	.00 Standard		
Note	Floor luminaire. Concrete body. Orange cable.		Apparecchio illuminante da terra. Corpo in cemento. Cavo arancione.

	Q		
	Max 10W - GU10 100-240V - 50/60Hz ON/OFF Bulb not included CE IP20		
		Standard - ON/OFF	1A2760000.00.00

Optional accessories / Accessori opzionali

	Bulbs / Lampadine		
LED - GU10 - PAR16		Not included	
		220-240V - 4,9W - 120° 3000K - 550lm - CRI >80 Energy Efficiency E	1Y0330740







A special project, an authentic ready-made.
 Obtained from a flexible fishing rod, it is a delicate and elegant sign,
 which brings to mind the subtle branches of a willow tree
 or bamboo canes floating on a light breeze.
 Sampei is an unexpected gift, it is the magic of looking up, using light as a hook,
 and being amazed by so much weightlessness.
 The light is the fisherman's line, catching faces, gazes, people.
 Available in 4 different heights and also in an outdoor version.



XXIII Compasso d'Oro ADI Award 2014
Elle Deco International Design Award 2011



Un progetto speciale, un autentico ready-made.
 Ricavata da una canna da pesca flessibile, è un segno delicato ed elegante,
 che fa pensare a effimeri rami di salice, a canne di bambù mosse da un debole vento.
 Sampei è un regalo inaspettato, è la magia di guardare in alto,
 usando la luce come amo, e stupirsi di tanta leggerezza.
 La luce è la lenza del pescatore, pronta per catturare volti, sguardi, persone.
 Disponibile in 4 altezze differenti e anche nella versione outdoor.

XXIII Premio Compasso d'Oro ADI 2014
Premio Elle Deco International Design Award 2011



Floor / Direct / Indoor				
Material	Glass fiber - Metal			
Finish	.03 Matt White	.04 Matt Black	.20 Magic Blue	.37 Copper Brown
	.41 Umbra Grey			
Note	Floor luminaire. Adjustable in all directions. Dimmer on the cable. White cable for the matt white finish, black cable for the other finishes.			
	Apparecchio illuminante da terra. Orientabile in tutte le direzioni. Dimmer lungo il cavo. Cavo bianco per la finitura bianco opaco e cavo nero per le altre finiture.			

	SAMPEI 230 Max 21W 220-240V - 50/60Hz 2700K - 1795lm / 3000K - 1890lm CRI >90 Driver integrated Dimmer on board C E IP20	Matt White - 2700K - Dimmer on board Matt White - 3000K - Dimmer on board Matt Black - 2700K - Dimmer on board Matt Black - 3000K - Dimmer on board Magic Blue - 2700K - Dimmer on board Magic Blue - 3000K - Dimmer on board Copper Brown - 2700K - Dimmer on board Copper Brown - 3000K - Dimmer on board Umbra Grey - 2700K - Dimmer on board Umbra Grey - 3000K - Dimmer on board	1A3730300.27.06 1A3730300.30.06 1A3730400.27.06 1A3730400.30.06 1A3732000.27.06 1A3732000.30.06 1A3733700.27.06 1A3733700.30.06 1A3734100.27.06 1A3734100.30.06
	SAMPEI 260 Max 21W 220-240V - 50/60Hz 2700K - 1795lm / 3000K - 1890lm CRI >90 Driver integrated Dimmer on board C E IP20	Matt White - 2700K - Dimmer on board Matt White - 3000K - Dimmer on board Matt Black - 2700K - Dimmer on board Matt Black - 3000K - Dimmer on board Magic Blue - 2700K - Dimmer on board Magic Blue - 3000K - Dimmer on board Copper Brown - 2700K - Dimmer on board Copper Brown - 3000K - Dimmer on board Umbra Grey - 2700K - Dimmer on board Umbra Grey - 3000K - Dimmer on board	1A3740300.27.06 1A3740300.30.06 1A3740400.27.06 1A3740400.30.06 1A3742000.27.06 1A3742000.30.06 1A3743700.27.06 1A3743700.30.06 1A3744100.27.06 1A3744100.30.06

	SAMPEI 290 Max 21W 220-240V - 50/60Hz 2700K - 1795lm / 3000K - 1890lm CRI >90 Driver integrated Dimmer on board C E IP20	Matt White - 2700K - Dimmer on board Matt White - 3000K - Dimmer on board Matt Black - 2700K - Dimmer on board Matt Black - 3000K - Dimmer on board Magic Blue - 2700K - Dimmer on board Magic Blue - 3000K - Dimmer on board Copper Brown - 2700K - Dimmer on board Copper Brown - 3000K - Dimmer on board Umbra Grey - 2700K - Dimmer on board Umbra Grey - 3000K - Dimmer on board	1A3750300.27.06 1A3750300.30.06 1A3750400.27.06 1A3750400.30.06 1A3752000.27.06 1A3752000.30.06 1A3753700.27.06 1A3753700.30.06 1A3754100.27.06 1A3754100.30.06
	SAMPEI 440 Max 21W 220-240V - 50/60Hz 2700K - 1859lm / 3000K - 1943lm CRI >90 Driver integrated Dimmer on board C E IP20	Matt White - 2700K - Dimmer on board Matt White - 3000K - Dimmer on board Matt Black - 2700K - Dimmer on board Matt Black - 3000K - Dimmer on board Magic Blue - 2700K - Dimmer on board Magic Blue - 3000K - Dimmer on board Copper Brown - 2700K - Dimmer on board Copper Brown - 3000K - Dimmer on board Umbra Grey - 2700K - Dimmer on board Umbra Grey - 3000K - Dimmer on board	1A3760300.27.06 1A3760300.30.06 1A3760400.27.06 1A3760400.30.06 1A3762000.27.06 1A3762000.30.06 1A3763700.27.06 1A3763700.30.06 1A3764100.27.06 1A3764100.30.06

Optional accessories / Accessori opzionali

Other accessories / Altri accessori



Accessory holder + Soft filter + Honeycomb louvre / Porta accessori + Filtro soft + Frangiluce nido d'ape		Not included
Matt Black		1X0070400.04.00



Accessory holder + Elliptical filter / Porta accessori + Filtro ellittico		Not included
Matt Black		1X0070400.05.00



Blue filter / Filtro blu		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.06.00



Red filter / Filtro rosso		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.07.00



Yellow filter / Filtro giallo		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.08.00





Magic Blue



Copper Brown



Umbra Grey





A nylon lampshade, strictly hand-stitched and hand-made.
Outdoor version also available.

Un paralume in nylon rigorosamente cucito e confezionato a mano.
Disponibile anche nella versione outdoor.

SHOJI

Davide Groppi - Paola Lenti / 2013

Floor / Diffuse / Indoor

Material

Metal - PBT - Polycarbonate


Finish

.00 Standard

Note

Floor luminaire. Hand-stitched shade. Matt black stems. Dimmer on the cable. Black cable.

Apparecchio illuminante da terra. Paralume cucito a mano. Steli nero opaco. Dimmer lungo il cavo. Cavo nero.



SHOJI

Max 18W - E27

100-240V - 50/60Hz

Dimmer on board

Bulb not included

C E IP20

Standard - Dimmer on board

1A2780000.00.06

Optional accessories / Accessori opzionali

Bulbs / Lampadine		LED - E27 - A60	Not included
		220-240V - 11,2W - 360° 2700K - 1521lm - CRI >90 Energy Efficiency D - Dimmable	





STOP

Davide Groppi / 2024

Technology has allowed us to rethink the classic floor lamp,
seeking the essence of its function.

A base, a stem, a head, STOP.

A circle in space, an ideographic project in which idea becomes form and function.

The disc can be oriented, while the luminous flux is extremely generous.

Archiproducts Design Award 2024

La tecnologia ci ha permesso di ripensare alla classica lampada da terra
cercando l'essenza della sua funzione.

Una base, uno stelo, una testa, STOP.

Un cerchio nello spazio, un progetto ideografico in cui l'idea diventa forma e funzione.


Il disco è orientabile e il flusso luminoso estremamente generoso.

Archiproducts Design Award 2024


STOP

Davide Groppi / 2024

Floor / Indirect / Indoor			
Material	Brass - Metal		
Finish	.01 Polished Chrome	.19	Polished Gold
Note	Floor luminaire. Adjustable Gravity Black matt black head. Matt black base. Dimmer on the cable. Black cable.		
	Apparecchio illuminante da terra. Testa orientabile nero opaco Gravity Black. Base nero opaco. Dimmer lungo il cavo. Cavo nero.		

	STOP		
	28W		
	24V DC		
	2700K - 3335lm / 3000K - 3500lm		
	CRI >90		
	Driver with plug included		
	Dimmer on board		
	CE  IP20		
	Polished Chrome - 2700K - Dimmer on board	1A4760100.27.06	
	Polished Chrome - 3000K - Dimmer on board	1A4760100.30.06	
	Polished Gold - 2700K - Dimmer on board	1A4761900.27.06	
	Polished Gold - 3000K - Dimmer on board	1A4761900.30.06	

Optional accessories / Accessori opzionali

Drivers / Alimentatori			
	Driver with plug / Alimentatore con spina		
	Included		
	Matt Black	Input 110-240V - 50/60Hz Output 24V DC - 36W - IP20	1Z0431300





Mies van der Rohe Pavilion
Barcelona

SUSPENSION / SOSPENSIONE

CARTESIO

Davide Groppi / 2018



A thin, circular mirror is suspended to provide light,
combining both direct and indirect lighting.
A sophisticated clamping system is used to position the disc wherever you want,
without the need for wall or ceiling wires.

Uno specchio circolare sospeso e sottile per illuminare,
coniugando la luce diretta e quella indiretta.
Il sofisticato sistema di fissaggio permette di posizionare il disco dove si desidera
senza il vincolo della posizione dei cavi di alimentazione a soffitto o a parete.

CARTESIO

Suspension / Direct-Indirect / Indoor

Material

Metal - Methacrylate

Finish

.00 Standard

Note

Suspension luminaire. Disc with mirror finish. Matt red rear disc. Matt white rose. AISI 304 stainless steel suspension cables. Dual emission. White cable.

Apparecchio illuminante a sospensione. Disco con finitura a specchio. Retro del disco rosso opaco. Rosone bianco opaco. Cavi di sospensione in inox AISI 304. Doppia emissione. Cavo bianco.

	CARTESIO 60 19W 110-240V - 50/60Hz 3000K - Down 350lm - Up 1050lm CRI >80 / >90 Driver integrated PUSH CE IP20	Standard - 3000K - PUSH	1A3190000.30.04
	CARTESIO 90 19W 110-240V - 50/60Hz 3000K - Down 350lm - Up 1050lm CRI >80 / >90 Driver integrated PUSH CE IP20	Standard - 3000K - PUSH	1A0070000.30.04





CATHODE


Omar Carraglia / 2015

A scientific looking bulb made from mouth blown glass.
The shape brings to mind a light bulb that was never born.
Think steampunk: situations in which instruments were inspired by
the rudiments of electricity. The classic light bulb that has no future
becomes a wonderful device made of luminous diodes.
What would the past have looked like if the future had arrived first?
Luminaire available also in ENDLESS version.

Un'ampolla di vetro soffiato a bocca dall'aspetto scientifico.
La forma evoca quella di una lampadina mai nata, atmosfere steampunk,
situazioni in cui le strumentazioni erano attivate dalle prime forme di elettricità.
La classica lampadina senza più futuro diventa un apparecchio a diodi luminosi.
Come sarebbe stato il passato se il futuro fosse arrivato prima?
Apparecchio illuminante disponibile anche nella versione ENDLESS.

Suspension / Diffuse / Indoor

Material	Blown glass - Metal		
Finish	.03 Matt White	.08 Brushed Brass	.28 Polished Black Chrome
Note			
	Suspension luminaire. Blown glass diffuser. Matt white rose and white cable for the matt white finish. Matt black rose and black cable for the other finishes. Single rose for more than one lamp on request. CATHODE 2: version with power cable only and without rose. CATHODE ENDLESS: luminaire dedicated to ENDLESS system (Max 48V DC - Max 150W - Max 4A). It can be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.	Apparecchio illuminante a sospensione. Diffusore in vetro soffiato. Rosone bianco opaco e cavo bianco per la finitura bianco opaco. Rosone nero opaco e cavo nero per le altre finiture. Rosone unico per più apparecchi su richiesta. CATHODE 2: versione con solo il cavo di alimentazione e senza rosone. CATHODE ENDLESS: apparecchio illuminante dedicato al sistema ENDLESS (Max 48V DC - Max 150W - Max 4A) ed utilizzabile, sullo stesso circuito, con i modelli ENDLESS. Vedi pagina ENDLESS.	



CATHODE 1

Ceiling driver version
5,6W
100-240V - 50/60Hz
2700K - 264lm / 3000K - 284lm
CRI >90
Driver integrated
ON/OFF

CE IP20

Matt White - 2700K - ON/OFF
Matt White - 3000K - ON/OFF
Brushed Brass - 2700K - ON/OFF
Brushed Brass - 3000K - ON/OFF
Polished Black Chrome - 2700K - ON/OFF
Polished Black Chrome - 3000K - ON/OFF

1A2980300.27.00
1A2980300.30.00
1A2980800.27.00
1A2980800.30.00
1A2982800.27.00
1A2982800.30.00




CATHODE 1

Ceiling driver version
6W
110-240V - 50/60Hz
2700K - 264lm / 3000K - 284lm
CRI >90
Driver integrated
DALI

CE IP20

Matt White - 2700K - DALI
Matt White - 3000K - DALI
Brushed Brass - 2700K - DALI
Brushed Brass - 3000K - DALI
Polished Black Chrome - 2700K - DALI
Polished Black Chrome - 3000K - DALI

1A2980300.27.01
1A2980300.30.01
1A2980800.27.01
1A2980800.30.01
1A2982800.27.01
1A2982800.30.01




CATHODE 1

Ceiling driver version
6W
110-240V - 50/60Hz
2700K - 264lm / 3000K - 284lm
CRI >90
Driver integrated
PUSH

CE IP20

Matt White - 2700K - PUSH
Matt White - 3000K - PUSH
Brushed Brass - 2700K - PUSH
Brushed Brass - 3000K - PUSH
Polished Black Chrome - 2700K - PUSH
Polished Black Chrome - 3000K - PUSH

1A2980300.27.04
1A2980300.30.04
1A2980800.27.04
1A2980800.30.04
1A2982800.27.04
1A2982800.30.04




CATHODE 1

Ceiling driver version
6W
110-240V - 50/60Hz
2700K - 264lm / 3000K - 284lm
CRI >90
Driver integrated
1-10V

CE IP20

Matt White - 2700K - 1-10V
Matt White - 3000K - 1-10V
Brushed Brass - 2700K - 1-10V
Brushed Brass - 3000K - 1-10V
Polished Black Chrome - 2700K - 1-10V
Polished Black Chrome - 3000K - 1-10V

1A2980300.27.03
1A2980300.30.03
1A2980800.27.03
1A2980800.30.03
1A2982800.27.03
1A2982800.30.03




CATHODE 1

Ceiling driver version
6W
110-240V - 50/60Hz
2700K - 264lm / 3000K - 284lm
CRI >90
Driver integrated
TRIAC/IGBT

CE IP20

Matt White - 2700K - TRIAC/IGBT
Matt White - 3000K - TRIAC/IGBT
Brushed Brass - 2700K - TRIAC/IGBT
Brushed Brass - 3000K - TRIAC/IGBT
Polished Black Chrome - 2700K - TRIAC/IGBT
Polished Black Chrome - 3000K - TRIAC/IGBT

1A2980300.27.02
1A2980300.30.02
1A2980800.27.02
1A2980800.30.02
1A2982800.27.02
1A2982800.30.02




CATHODE 2

Remote driver version
4W
Max 350mA DC
2700K - 264lm / 3000K - 284lm
CRI >90
Driver not included

CE IP20

Matt White - 2700K
Matt White - 3000K
Brushed Brass - 2700K
Brushed Brass - 3000K
Polished Black Chrome - 2700K
Polished Black Chrome - 3000K

1A2980300.27.20
1A2980300.30.20
1A2980800.27.20
1A2980800.30.20
1A2982800.27.20
1A2982800.30.20



CATHODE ENDLESS

ENDLESS version only
6,3W - 0,16A
48V DC
2700K - 264lm / 3000K - 284lm
CRI >90
Driver not included
See page ENDLESS


CE IP20 ENEC

Matt White - 2700K
Matt White - 3000K
Brushed Brass - 2700K
Brushed Brass - 3000K
Polished Black Chrome - 2700K
Polished Black Chrome - 3000K


1A2980300.27.40
1A2980300.30.40
1A2980800.27.40
1A2980800.30.40
1A2982800.27.40
1A2982800.30.40

Compulsory accessories / Accessori obbligatori


Drivers / Alimentatori



Driver / Alimentatore				Not included
220-240V(100-127V)	350mA/17W(15W)/IP20/DALI	CATHODE 2	1Z0241180.350	



Driver / Alimentatore				Not included
220-240V(100-127V)	350mA/18W(15W)/IP20/PUSH - 1-10V	CATHODE 2	1Z0240870.350	




Driver / Alimentatore				Not included
220-240V	350mA/17W/IP20/TRIAC/IGBT	CATHODE 2	1Z0240850.350	

Optional accessories / Accessori opzionali


Suspension kits / Kit di sospensione




Decentralization kit / Kit decentratore			Not included
	CATHODE 1	1A0360000.00.00	




Kit ceiling rose and decentralizer / Kit rosone e decentratore				Not included
Matt White	Transparent cable 3 m included	CATHODE 1	1A0770300.00.00	
Matt Black	Transparent cable 3 m included	CATHODE 1	1A0770400.00.00	



Recessed suspension kit for 12,5 mm plasterboard / Kit di sospensione da incasso per cartongesso 12,5 mm				Not included
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	CATHODE 2	1X0000300.06.00	
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	CATHODE 2	1X0000400.06.00	




Ceiling suspension kit / Kit di sospensione da soffitto				Not included
Matt White	For electrical cables - 1 Piece	CATHODE 2	1X0010300.06.00	
Matt Black	For electrical cables - 1 Piece	CATHODE 2	1X0010400.06.00	



Wall adapter plate / Piastra di adattamento da parete			Not included
Matt White	For mounting on brick masonry walls	CATHODE 2	1X0050300.01.00



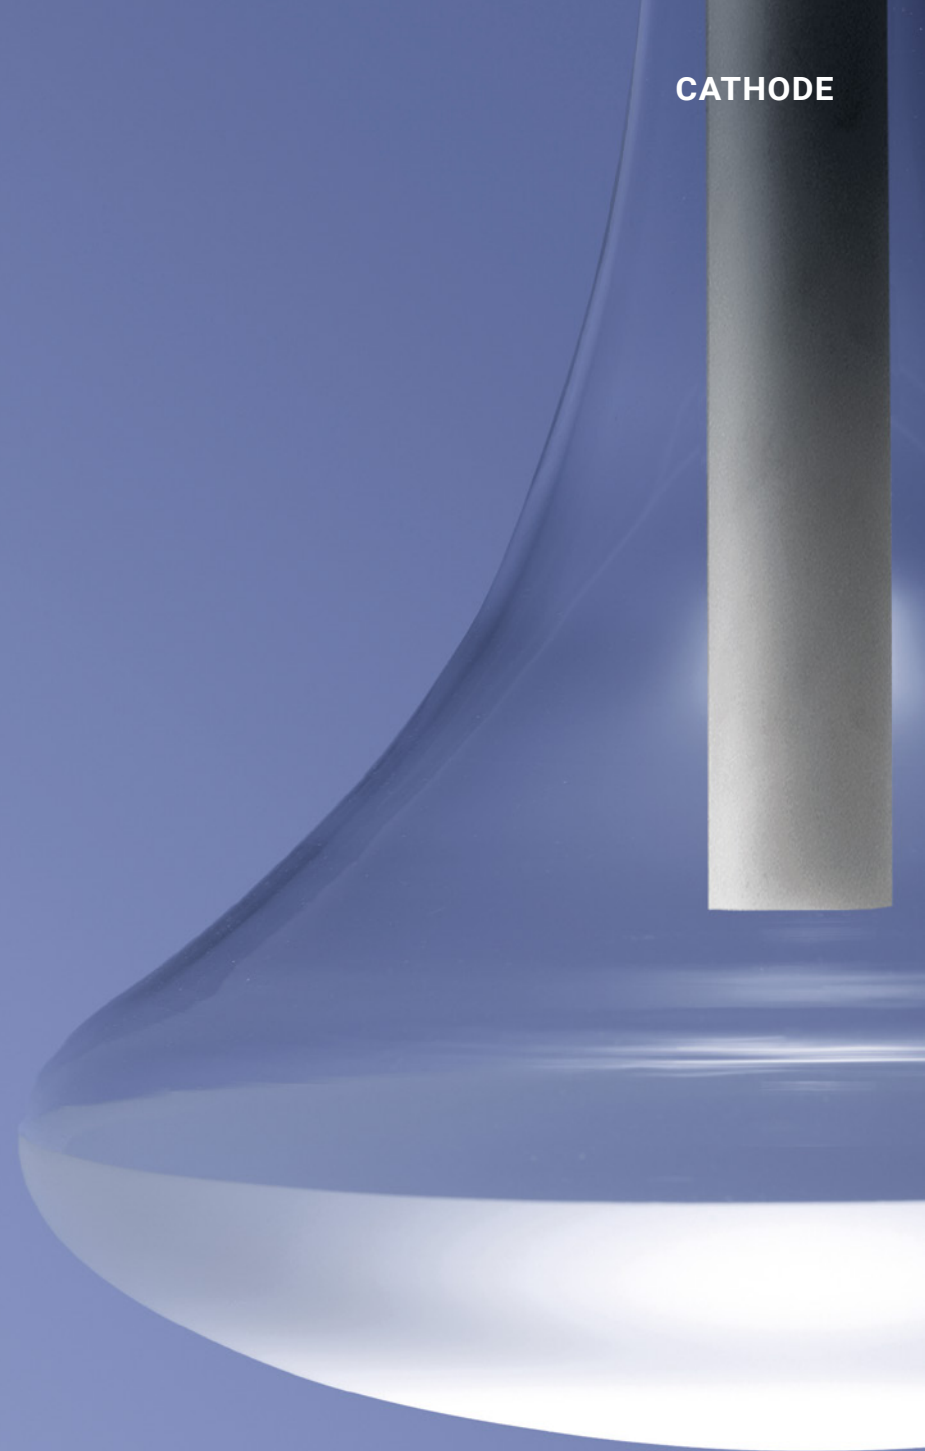

FOSBURY

Davide Groppi / 2014



A lamp that interprets the classic theme of decentralization.
An acrobatic and apparently precarious presence, bringing light where you prefer it,
starting from a simple wall socket.
AZ Award 2016

Una lampada che interpreta il classico tema del decentramento.
Una presenza funambolica e apparentemente instabile per portare la luce
dove si desidera partendo da una semplice presa elettrica.
Premio AZ Award 2016


Suspension / Direct-Indirect / Indoor

MaterialMetal
Finish.04 Matt Black

Note

Suspension luminaire with floor support. Matt white rose. AISI 304 stainless steel suspension cable. Dual emission. Indirect blue light. Transparent cable.

Apparecchio illuminante a sospensione con appoggio a terra. Rosone bianco opaco. Cavo di sospensione in inox AISI 304. Doppia emissione. Luce indiretta blu. Cavo trasparente.



FOSBURY
23W
220-240V - 50/60Hz
2700K - Down 765lm - Up 59lm /
3000K - Down 823lm - Up 59lm
CRI >90
UGR <19
Driver integrated
ON/OFF
CE IP20

Matt Black - 2700K - ON/OFF	1A2590400.27.00
Matt Black - 3000K - ON/OFF	1A2590400.30.00

Optional accessories / Accessori opzionali

Suspension kits / Kit di sospensione



Sloped ceiling suspension kit / Kit di sospensione per soffitto inclinato	Not included
Nickel plated - 1 Piece	1A0510000.00.00





LED IS MORE

Davide Groppi / 2011

A tribute to Mies van der Rohe and his Less is More.
The project represents a light icon in a LED key,
with a peculiar attention to energy savings and the quality of light.

Un omaggio a Mies van der Rohe e al suo Less is More.
Il progetto rappresenta un'icona della luce, rivisitata in chiave LED,
con una particolare attenzione al risparmio energetico e alla qualità della luce stessa.


Suspension / Diffuse / Indoor

MaterialMetal - Methacrylate
Finish.03 Matt White

Note

Suspension luminaire. Sanded methacrylate diffuser. Matt white rose. White cable. Single rose for more than one lamp on request. LED IS MORE 2: version with power cable only and without rose.

Apparecchio illuminante a sospensione. Diffusore in metacrilato sabbiato. Rosonebiancoopaco.Cavobianco.Rosoneunicoperpiùapparechchisurichiasta. LED IS MORE 2: versione con solo il cavo di alimentazione e senza rosone.



LED IS MORE 1

Ceiling driver version
5,6W
100-240V - 50/60Hz
3000K - 354lm
CRI >90
Driver integrated
ON/OFF

CE IP20

Matt White - 3000K - ON/OFF

1A2790300.30.00




LED IS MORE 2

Remote driver version
4W
Max 350mA DC
3000K - 354lm
CRI >90
Driver not included


CE IP20

Matt White - 3000K


1A2790300.30.20



Driver / Alimentatore				Not included
220-240V(100-127V)	350mA/17W(15W)/IP20/DALI	LED IS MORE 2	1Z0241180.350	




Driver / Alimentatore				Not included
220-240V(100-127V)	350mA/18W(15W)/IP20/PUSH - 1-10V	LED IS MORE 2	1Z0240870.350	




Driver / Alimentatore				Not included
220-240V	350mA/17W/IP20/TRIAC/IGBT	LED IS MORE 2	1Z0240850.350	

Optional accessories / Accessori opzionali


Suspension kits / Kit di sospensione




Decentralization kit / Kit decentratore			Not included
	LED IS MORE 1	1A0360000.00.00	




Kit ceiling rose and decentralizer / Kit rosone e decentratore				Not included
Matt White	Transparent cable 3 m included	LED IS MORE 1	1A0770300.00.00	
Matt Black	Transparent cable 3 m included	LED IS MORE 1	1A0770400.00.00	



Recessed suspension kit for 12,5 mm plasterboard / Kit di sospensione da incasso per cartongesso 12,5 mm				Not included
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	LED IS MORE 2	1X0000300.06.00	
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	LED IS MORE 2	1X0000400.06.00	



Ceiling suspension kit / Kit di sospensione da soffitto				Not included
Matt White	For electrical cables - 1 Piece	LED IS MORE 2	1X0010300.06.00	
Matt Black	For electrical cables - 1 Piece	LED IS MORE 2	1X0010400.06.00	



Wall adapter plate / Piastra di adattamento da parete				Not included
Matt White	For mounting on brick masonry walls	LED IS MORE 2	1X0050300.01.00	



LOUIS XIV

Davide Groppi / 2023

Louis XIV is the freakiest letter of our light alphabet.
It's a disobedient design that translates a certain rebellion
to common lamp models into light.
I wanted to investigate the idea of the chandelier: in line with our poetics,
Louis XIV is the only possible solution for lightness and irony.
Dimmable suspension lamp with dual emission.

Louis XIV è la lettera più "freak" del nostro alfabeto luminoso.
È un progetto disobbediente, che traduce in luce
una certa ribellione ai modelli comuni di fare lampade.
Volevo affrontare il tema del lampadario a gocce:
Louis XIV è l'unica soluzione possibile, secondo le nostre poetiche, tra leggerezza e ironia.
Lampada a sospensione dimmerabile a doppia emissione.

LOUIS XIV


Davide Groppi / 2023

Suspension / Direct-Indirect / Indoor

Material	Glass - Metal
Finish	.19 Polished Gold

Note Suspension luminaire. Seventy-five crystal drops and two birds. Natural brass branches. Structure with polished gold finish. Matt white rose. Dual emission and on/off. White cable. LOUIS XIV 2: version with power cable only and without rose.

Apparecchio illuminante a sospensione. Settantacinque gocce in cristallo e due uccellini. Rami in ottone naturale. Struttura con finitura oro lucido. Rosone bianco opaco. Doppia emissione ed accensione. Cavo bianco. LOUIS XIV 2: versione con solo il cavo di alimentazione e senza rosone.




LOUIS XIV 1

Ceiling driver version
17W
220-240V - 50/60Hz
2700K - Up 842lm - Down 198lm /
3000K - Up 842lm - Down 198lm
CRI >90
UGR <19
Driver integrated
TRIAC/IGBT
CE IP20

Polished Gold - 2700K - TRIAC/IGBT
Polished Gold - 3000K - TRIAC/IGBT

1A4361900.27.02
1A4361900.30.02



LOUIS XIV 1


Ceiling driver version
18W
110-240V - 50/60Hz
2700K - Up 842lm - Down 198lm /
3000K - Up 842lm - Down 198lm
CRI >90
UGR <19
Driver integrated
DALI - PUSH - 1-10V
CE IP20 

Polished Gold - 2700K - DALI - PUSH - 1-10V
Polished Gold - 3000K - DALI - PUSH - 1-10V

1A4361900.27.07
1A4361900.30.07

LOUIS XIV

Davide Groppi / 2023



LOUIS XIV 2

Remote driver version
14W
Max 250mA DC
2700K - Up 842lm - Down 198lm /
3000K - Up 842lm - Down 198lm
CRI >90
UGR <19
Driver not included
2 Drivers required




CE  IP20 

Polished Gold - 2700K
Polished Gold - 3000K

1A4361900.27.20
1A4361900.30.20

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver for uplight emission / Alimentatore per emissione uplight

Not included

220-240V	250mA/12,5W/IP20/TRIAC/IGBT	LOUIS XIV 2	1Z0241280
----------	-----------------------------	-------------	-----------

Driver for downlight emission / Alimentatore per emissione downlight

Not included

100-277	250mA/3W/IP20/TRIAC/IGBT	LOUIS XIV 2	1Z0400900
---------	--------------------------	-------------	-----------

Driver / Alimentatore

Not included

220-240V(110-127V)	250mA/13,5W(13,5W)/IP20/DALI - PUSH LOUIS XIV 2 - 1-10V	1Z0241270.250
--------------------	--	---------------

Optional accessories / Accessori opzionali

Suspension kits / Kit di sospensione



Recessed suspension kit for 12,5 mm plasterboard / Kit di sospensione da incasso per cartongesso 12,5 mm

Not included

Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	LOUIS XIV 2	1X0000300.05.00
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	LOUIS XIV 2	1X0000400.05.00






MAGIA

Michele Groppi / 2023


Light and transparency are the true stars of this project. We have always liked to think heretically, evoking mystery, magic and seduction. Magia is a modular suspension lighting system for indirect light that can be adapted to suit different heights of the rooms. In this case, the lens is not used to focus, but to modify the vision and perception of the object. The effect of the convex lens conceals the part of the light beam and produces the lightest effect of suspension and inconsistency. Luminaire designed also to be powered by ENDLESS conductive tape. **Archiproducts Design Award 2023**

La luce e la trasparenza sono le vere protagoniste di questo progetto. Da sempre ci piace pensare in modo eretico, evocando mistero, magia e seduzione. Magia è un sistema d'illuminazione a luce indiretta e a sospensione, componibile e adattabile a seconda delle diverse altezze degli ambienti. In questo caso, la lente non è usata per focalizzare, ma per modificare la visione e la percezione dell'oggetto. L'effetto della lente convessa permette di celare la parte di emissione della luce e produrre un leggerissimo effetto di sospensione e inconsistenza. Apparecchio illuminante alimentabile anche con il tape conduttivo ENDLESS. **Archiproducts Design Award 2023**


Single installation
with ceiling driver

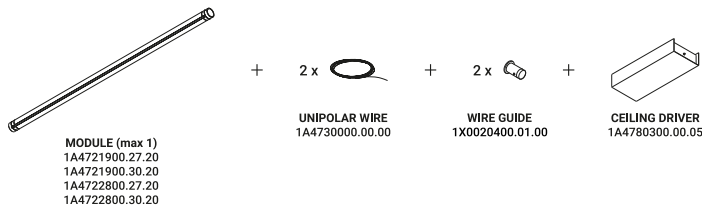


Multiple installation
with ceiling driver

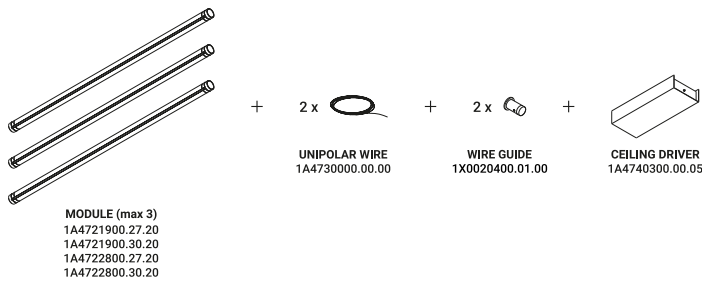

Single installation
with recessed or ceiling
suspension kit

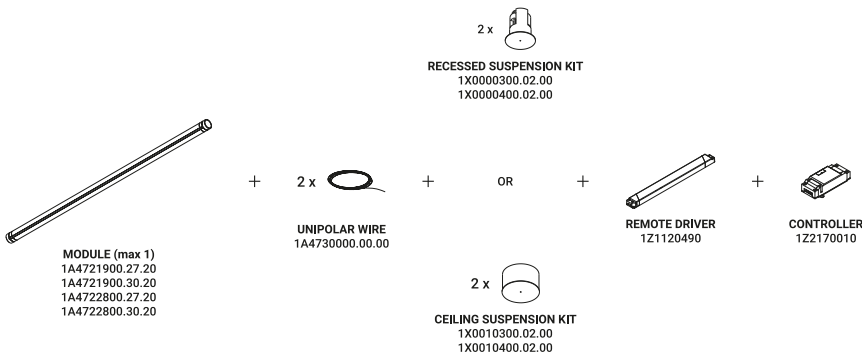

Multiple installation
with recessed or ceiling
suspension kit

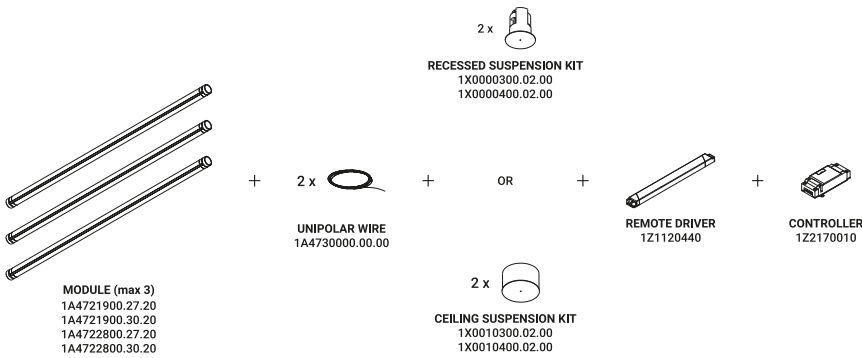

MAGIA

Michele Groppi / 2023

Suspension / Direct-Indirect / Indoor

Material

Metal - PMMA

Finish


.19 Polished Gold

.28 Polished Black Chrome

Note

Modular suspension luminaire. Adjustable along the horizontal axis. Transparent bar with refractive effect. LED module profile with matt black finish. Details with polished gold or black chrome finish. Matt white rose. Possibility for the luminaire to be powered by ENDLESS conductive tape and by dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS.

Apparecchio illuminante a sospensione componibile. Orientabile lungo l'asse orizzontale. Barra trasparente con effetto rifrattivo. Profilo del modulo LED con finitura nero opaco. Dettagli con finitura oro lucido o cromo nero. Rosone bianco opaco. Alimentabile anche con il tape conduttivo ENDLESS e tensione/corrente dedicata (Max 48V DC - Max 150W - Max 4A). Vedi pagina ENDLESS.

	MAGIA - MODULE			
	19W			
	24V DC			
	2700K - 1272lm / 3000K - 1312lm			
	CRI >90			
	Driver not included			
	  IP20 			

Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione

	Wire guide / Guidacavo			Not included
	Matt Black	1 Piece		1X0020400.01.00
	Unipolar wire - 6 m / Cavo unipolare - 6 m			Not included
		1 Piece - Max 60V DC	Max 3 modules	1A4730000.00.00

Suspension kits / Kit di sospensione


	Recessed suspension kit for 12,5 mm plasterboard / Kit di sospensione da incasso per cartongesso 12,5 mm			Not included
	Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000300.02.00
	Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000400.02.00
	Ceiling suspension kit / Kit di sospensione da soffitto			Not included
	Matt White	For electrical cables - 1 Piece		1X0010300.02.00
	Matt Black	For electrical cables - 1 Piece		1X0010400.02.00

Michele Groppi / 2023


MAGIA

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Ceiling driver / Driver da soffitto				Not included
Matt White	Input 220-240V - 50/60Hz Output 24V - 21W - IP20 DALI - PUSH - 1-10V - TRIAC	Max 1 module		1A4780300.00.05



Ceiling driver / Driver da soffitto				Not included
Matt White	Input 110-240V - 50/60Hz Output 24V - 60W - IP20 DALI - PUSH - 1-10V - TRIAC	Max 3 modules		1A4740300.00.05

Driver / Alimentatore				Not included
100-240V	24V/50W/IP20/ON/OFF	Max 1 module		1Z1120490


Driver / Alimentatore				Not included
100-240V	24V/80W/IP20/ON/OFF	Max 3 modules		1Z1120440

Driver / Alimentatore				Not included
100-240V	24V/150W/IP67/1-10V	Max 6 modules		1Z1120500


Controller				Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20			1Z2170010

Optional accessories / Accessori opzionali


Suspension kits / Kit di sospensione

	Wall adapter plate / Piastra di adattamento da parete			Not included
	Matt White	For mounting on brick masonry walls		1X0050300.01.00




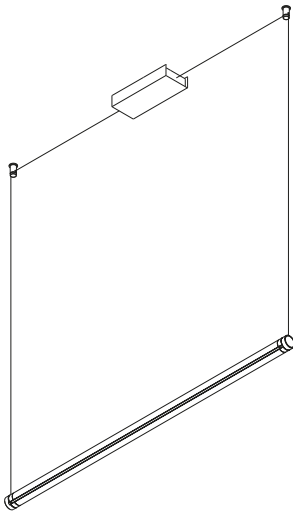


Example of single installation with ceiling driver

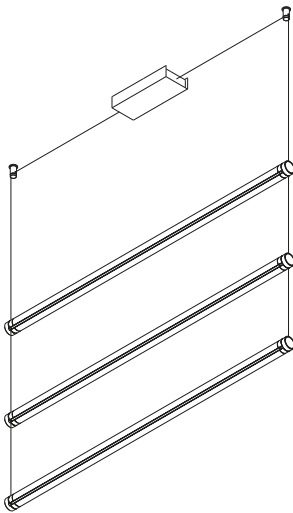


Example of multiple installation with ceiling driver

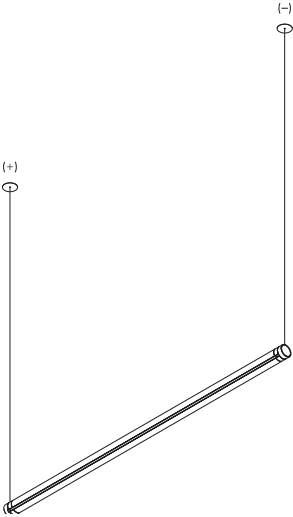


Example of single installation with recessed suspension kit

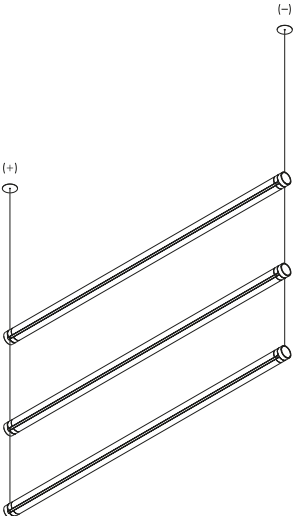


Example of multiple installation with recessed suspension kit

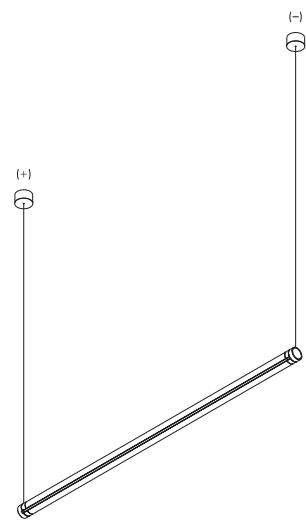

Example of single installation with ceiling suspension kit

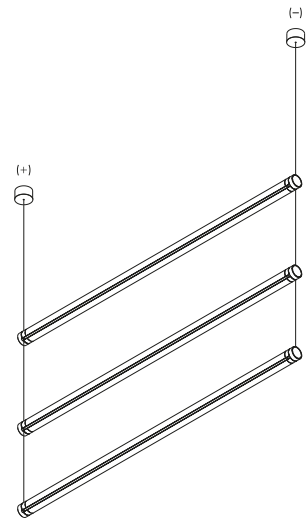


Example of multiple installation with ceiling suspension kit

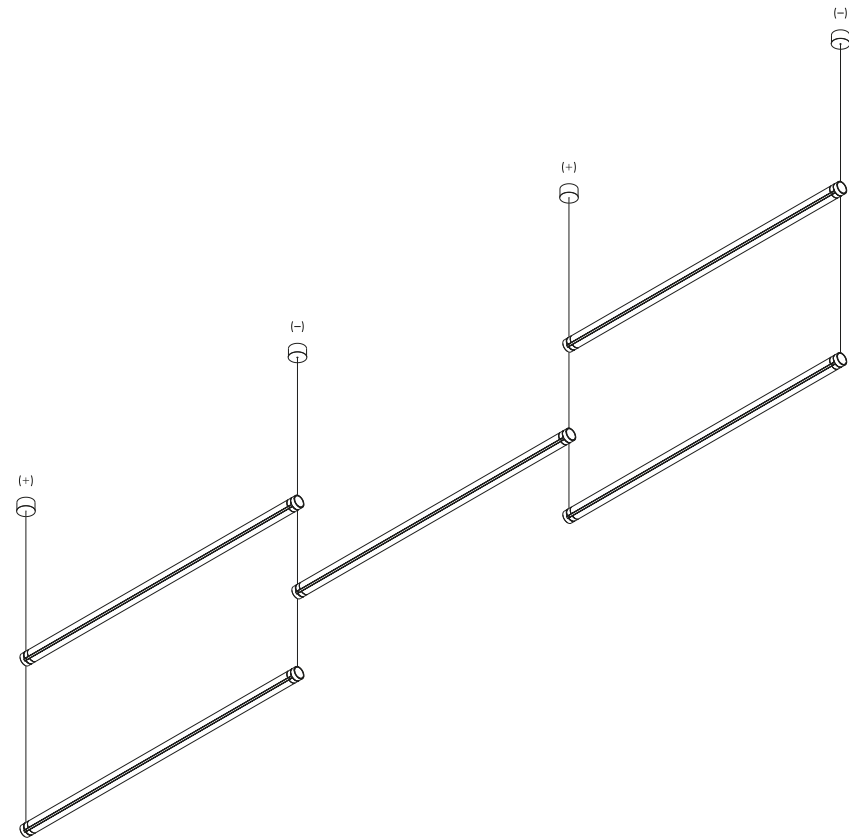

Example of multiple installation | **Max 3 modules for cable**



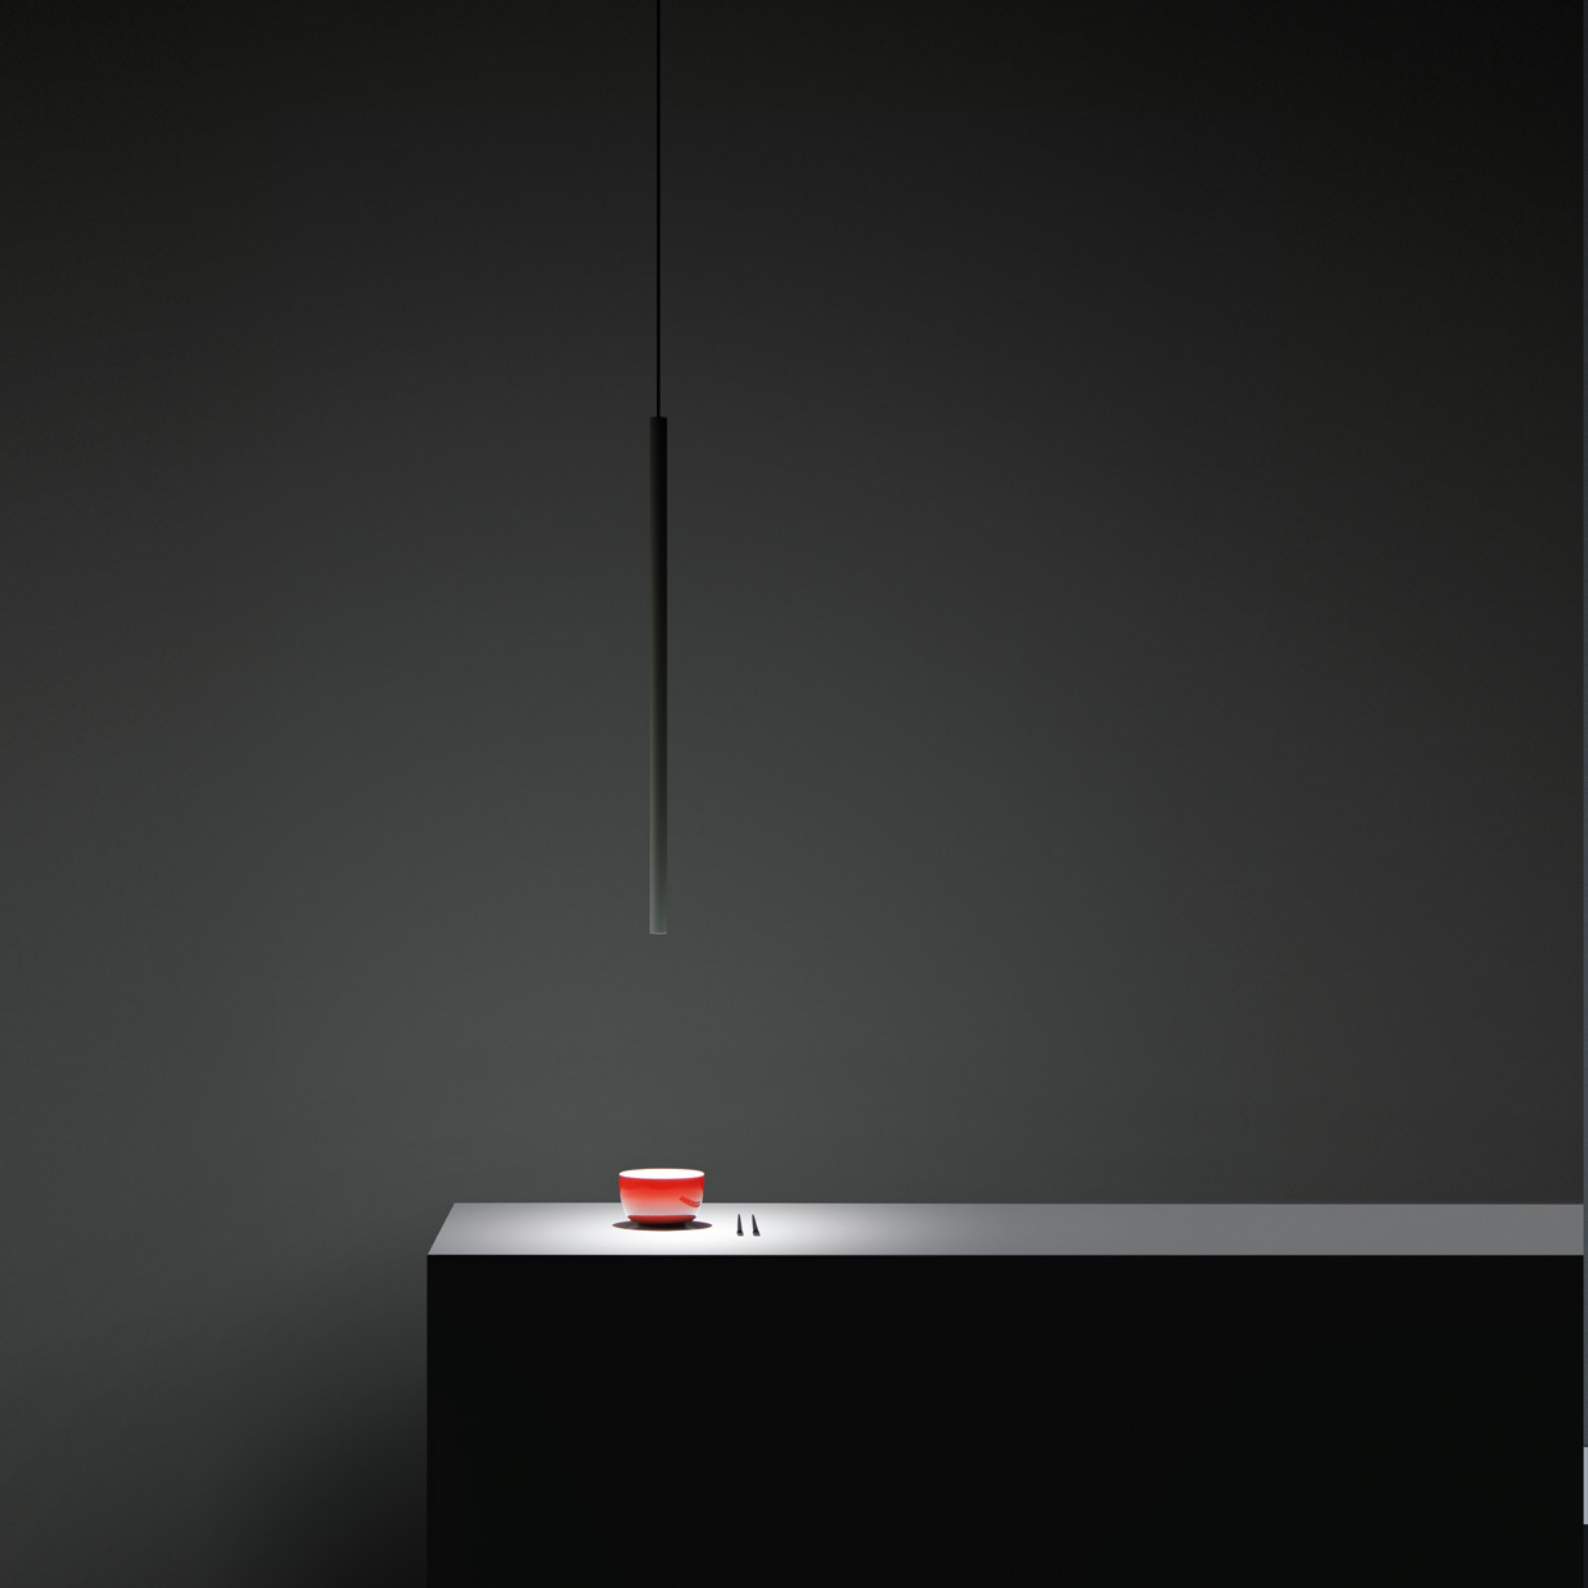

MISS

Omar Carraglia / 2006

So slim and essential...

The fundamental concept of this project is minimalism.

A small tube that lights the table with wonder.

A real dual project: sign and light.

Luminaire available also in ENDLESS version.

Così esile ed essenziale...

L'essenzialità è la componente fondamentale di progetto.

Un piccolo tubo in metallo per fare una meravigliosa luce sul tavolo.

Un vero progetto duale: segno e luce.

Apparecchio illuminante disponibile anche nella versione ENDLESS.

Suspension / Direct / Indoor

Material	Metal			
Finish	.03 Matt White	.04 Matt Black	.08 Brushed Brass	.26 Total Black
	.28 Polished Black Chrome			
Note	Suspension luminaire. Matt white rose and white cable for the matt white and matt black finish. Matt black rose and black cable for the other finishes. Single rose for more than one lamp on request. MISS 2: version with power cable only and without rose. MISS ENDLESS: luminaire dedicated to ENDLESS system (Max 48V DC - Max 150W - Max 4A). It can be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.			

Apparecchio illuminante a sospensione. Rosone bianco opaco e cavo bianco per la finitura bianco opaco e nero opaco. Rosone nero opaco e cavo nero per le altre finiture. Rosone unico per più apparecchi su richiesta. MISS 2: versione con solo il cavo di alimentazione e senza rosone. MISS ENDLESS: apparecchio illuminante dedicato al sistema ENDLESS (Max 48V DC - Max 150W - Max 4A) ed utilizzabile, sullo stesso circuito, con i modelli ENDLESS. Vedi pagina ENDLESS.



MISS 1

Ceiling driver version
5,6W
100-240V - 50/60Hz
2700K - 290lm / 3000K - 310lm
CRI >90
Driver integrated
ON/OFF

CE IP20

Matt White - 2700K - ON/OFF	1A2960300.27.00
Matt White - 3000K - ON/OFF	1A2960300.30.00
Matt Black - 2700K - ON/OFF	1A2960400.27.00
Matt Black - 3000K - ON/OFF	1A2960400.30.00
Brushed Brass - 2700K - ON/OFF	1A2960800.27.00
Brushed Brass - 3000K - ON/OFF	1A2960800.30.00
Total Black - 2700K - ON/OFF	1A2962600.27.00
Total Black - 3000K - ON/OFF	1A2962600.30.00
Polished Black Chrome - 2700K - ON/OFF	1A2962800.27.00
Polished Black Chrome - 3000K - ON/OFF	1A2962800.30.00




MISS 1

Ceiling driver version
6W
110-240V - 50/60Hz
2700K - 290lm / 3000K - 310lm
CRI >90
Driver integrated
DALI

CE IP20

Matt White - 2700K - DALI	1A2960300.27.01
Matt White - 3000K - DALI	1A2960300.30.01
Matt Black - 2700K - DALI	1A2960400.27.01
Matt Black - 3000K - DALI	1A2960400.30.01
Brushed Brass - 2700K - DALI	1A2960800.27.01
Brushed Brass - 3000K - DALI	1A2960800.30.01
Total Black - 2700K - DALI	1A2962600.27.01
Total Black - 3000K - DALI	1A2962600.30.01
Polished Black Chrome - 2700K - DALI	1A2962800.27.01
Polished Black Chrome - 3000K - DALI	1A2962800.30.01




MISS 1

Ceiling driver version
6W
110-240V - 50/60Hz
2700K - 290lm / 3000K - 310lm
CRI >90
Driver integrated
PUSH

CE IP20

Matt White - 2700K - PUSH	1A2960300.27.04
Matt White - 3000K - PUSH	1A2960300.30.04
Matt Black - 2700K - PUSH	1A2960400.27.04
Matt Black - 3000K - PUSH	1A2960400.30.04
Brushed Brass - 2700K - PUSH	1A2960800.27.04
Brushed Brass - 3000K - PUSH	1A2960800.30.04
Total Black - 2700K - PUSH	1A2962600.27.04
Total Black - 3000K - PUSH	1A2962600.30.04
Polished Black Chrome - 2700K - PUSH	1A2962800.27.04
Polished Black Chrome - 3000K - PUSH	1A2962800.30.04




MISS 1

Ceiling driver version
6W
110-240V - 50/60Hz
2700K - 290lm / 3000K - 310lm
CRI >90
Driver integrated
1-10V

CE IP20

Matt White - 2700K - 1-10V	1A2960300.27.03
Matt White - 3000K - 1-10V	1A2960300.30.03
Matt Black - 2700K - 1-10V	1A2960400.27.03
Matt Black - 3000K - 1-10V	1A2960400.30.03
Brushed Brass - 2700K - 1-10V	1A2960800.27.03
Brushed Brass - 3000K - 1-10V	1A2960800.30.03
Total Black - 2700K - 1-10V	1A2962600.27.03
Total Black - 3000K - 1-10V	1A2962600.30.03
Polished Black Chrome - 2700K - 1-10V	1A2962800.27.03
Polished Black Chrome - 3000K - 1-10V	1A2962800.30.03




MISS 1

Ceiling driver version
6W
110-240V - 50/60Hz
2700K - 290lm / 3000K - 310lm
CRI >90
Driver integrated
TRIAC/IGBT

CE IP20

Matt White - 2700K - TRIAC/IGBT	1A2960300.27.02
Matt White - 3000K - TRIAC/IGBT	1A2960300.30.02
Matt Black - 2700K - TRIAC/IGBT	1A2960400.27.02
Matt Black - 3000K - TRIAC/IGBT	1A2960400.30.02
Brushed Brass - 2700K - TRIAC/IGBT	1A2960800.27.02
Brushed Brass - 3000K - TRIAC/IGBT	1A2960800.30.02
Total Black - 2700K - TRIAC/IGBT	1A2962600.27.02
Total Black - 3000K - TRIAC/IGBT	1A2962600.30.02
Polished Black Chrome - 2700K - TRIAC/IGBT	1A2962800.27.02
Polished Black Chrome - 3000K - TRIAC/IGBT	1A2962800.30.02




MISS 2

Remote driver version
4W
Max 350mA DC
2700K - 290lm / 3000K - 310lm
CRI >90
Driver not included



Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K
Brushed Brass - 2700K
Brushed Brass - 3000K
Total Black - 2700K
Total Black - 3000K
Polished Black Chrome - 2700K
Polished Black Chrome - 3000K

1A2960300.27.20
1A2960300.30.20
1A2960400.27.20
1A2960400.30.20
1A2960800.27.20
1A2960800.30.20
1A2962600.27.20
1A2962600.30.20
1A2962800.27.20
1A2962800.30.20



MISS ENDLESS

Endless version only
6,3W - 0,16A
48V DC
2700K - 290lm / 3000K - 310lm
CRI >90
Driver not included
See page ENDLESS






Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K
Brushed Brass - 2700K
Brushed Brass - 3000K
Total Black - 2700K
Total Black - 3000K
Polished Black Chrome - 2700K
Polished Black Chrome - 3000K

1A2960300.27.40
1A2960300.30.40
1A2960400.27.40
1A2960400.30.40
1A2960800.27.40
1A2960800.30.40
1A2962600.27.40
1A2962600.30.40
1A2962800.27.40
1A2962800.30.40

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori







Driver / Alimentatore				Not included
220-240V(100-127V)	350mA/17W(15W)/IP20/DALI	MISS 2	1Z0241180.350	

Driver / Alimentatore				Not included
220-240V(100-127V)	350mA/18W(15W)/IP20/PUSH - 1-10V	MISS 2	1Z0240870.350	

Driver / Alimentatore				Not included
220-240V	350mA/17W/IP20/TRIAC/IGBT	MISS 2	1Z0240850.350	

Optional accessories / Accessori opzionali

Suspension kits / Kit di sospensione



Decentralization kit / Kit decentratore				Not included
		MISS 1	1A0360000.00.00	

Kit ceiling rose and decentralizer / Kit rosone e decentratore				Not included
Matt White	Transparent cable 3 m included	MISS 1	1A0770300.00.00	
Matt Black	Transparent cable 3 m included	MISS 1	1A0770400.00.00	

Recessed suspension kit for 12,5 mm plasterboard / Kit di sospensione da incasso per cartongesso 12,5 mm				Not included
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	MISS 2	1X0000300.06.00	
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	MISS 2	1X0000400.06.00	

Ceiling suspension kit / Kit di sospensione da soffitto				Not included
Matt White	For electrical cables - 1 Piece	MISS 2	1X0010300.06.00	
Matt Black	For electrical cables - 1 Piece	MISS 2	1X0010400.06.00	

Wall adapter plate / Piastra di adattamento da parete				Not included
Matt White	For mounting on brick masonry walls	MISS 2	1X0050300.01.00	



• 25 mm •





MOON

Davide Groppi / 2005



Moon was created from the dream of bringing the moon inside your own home.
The handmade Japanese paper surface makes every lamp unique.
Table and floor versions available.


Moon nasce da un sogno, quello di portare la luna dentro casa.
La superficie di carta giapponese, fatta a mano, rende unico ogni pezzo.
Disponibile anche nelle versioni da tavolo e terra.

Suspension / Diffuse / Indoor

Material Japanese paper - PE
Finish .00 Standard

Note Suspension luminaire. PE and Japanese paper shade. Matt white rose. AISI 304 stainless steel suspension cable. White cable. MOON 60 DE: version with dual emission and on/off. Transparent cable. For air and sea shipping: moisture barrier bag packaging compulsory for all models and wooden crate specifically compulsory for MOON 120 model. A deliberate feature of MOON design is the creased, glued and overlapping effect of the paper. The used material is sensitive to humidity. This product is not suitable for use in high humidity environments.


Apparecchio illuminante a sospensione. Paralume in PE e carta giapponese. Rosone bianco opaco. Cavo di sospensione in inox AISI 304. Cavo bianco. MOON 60 DE: versione a doppia emissione ed accensione. Cavo trasparente. Per spedizioni aerea e via nave: sacco barriera obbligatorio per tutti i modelli e cassa in legno obbligatoria per modello MOON 120. Una caratteristica voluta del design di MOON è l'effetto stropicciato, incollato e sovrapposto della carta. Il materiale utilizzato è sensibile all'umidità. Questo prodotto non è adatto all'uso in ambienti ad alta umidità.



MOON 60
Max 15W - E27
100-240V - 50/60Hz
ON/OFF
Bulb not included
C € IP20

Standard - ON/OFF


| 1A2820000.00.00 |



MOON 60 DE
Dual emission
Max 15W - E27 + Max 10W - GU10
100-240V - 50/60Hz
ON/OFF
Bulb not included
C € IP20

Standard - ON/OFF


| 1A2830000.00.00 |



MOON 80
Max 15W - E27
100-240V - 50/60Hz
ON/OFF
Bulb not included
C € IP20

Standard - ON/OFF


| 1A2840000.00.00 |



MOON 120
Max 2x25W - E27
100-240V - 50/60Hz
ON/OFF
Bulb not included
C € IP20

Standard - ON/OFF

| 1A2850000.00.00 |



MOON 200
Max 4x25W - E27
100-240V - 50/60Hz
ON/OFF
Bulb not included
Moisture barrier bag included
Wooden crate included
Transport excluded
C € IP20

Standard - ON/OFF

| 1A2860000.00.00 |

Optional accessories / Accessori opzionali

Bulbs / Lampadine



LED - GU10 - PAR16		Not included	
	220-240V - 5,5W - 25° 2700K - 355lm - CRI >97 Energy Efficiency G - Dimmable	MOON 60 DE	1Y0330770



LED - E27 - A60		Not included	
	220-240V - 11,2W - 360° 2700K - 1521lm - CRI >90 Energy Efficiency D - Dimmable	MOON 60 / MOON 60 DE / MOON 80 / MOON 200	1Y0330790



LED - E27 - A150		Not included	
	220-240V - 20W - 200° 2700K - 2452lm - CRI >80 Energy Efficiency E - Dimmable	MOON 120	1Y2160020

Suspension kits / Kit di sospensione




Sloped rose suspension kit / Kit di sospensione per rosone inclinato		Not included	
	Nickel plated - 1 Piece	MOON 60 / MOON 60 DE / MOON 80	1A0520000.00.00



Sloped ceiling suspension kit / Kit di sospensione per soffitto inclinato		Not included	
	Nickel plated - 1 Piece	MOON 120	1A0510000.00.00



Decentralization kit / Kit decentratore		Not included	
			1A0360000.00.00



Kit ceiling rose and decentralizer / Kit rosone e decentratore		Not included	
Matt White	Transparent cable 3 m included		1A0770300.00.00
Matt Black	Transparent cable 3 m included		1A0770400.00.00

Optional accessories / Accessori opzionali

Other accessories / Altri accessori

Moisture barrier bag / Sacco barriera		Not included	
	Packaging for air and sea shipping	MOON 60 / MOON 60 DE	4A2820010


Moisture barrier bag / Sacco barriera		Not included	
	Packaging for air and sea shipping	MOON 80	4A2840010

Moisture barrier bag / Sacco barriera		Not included	
	Packaging for air and sea shipping	MOON 120	49860020

Wooden crate / Cassa in legno		Not included	
	Packaging for air and sea shipping	MOON 120	49860010









MOON

Private Residence
Piacenza



NEURO

Davide Groppi - Beppe Merlano / 2013

The idea is to bring light wherever you like, starting from a socket.

A simple project, almost a revival of the old electrical wiring.

A plug, a cable, some isolators, a socket and a LED.

Outdoor version also available.

Design Plus Award 2014

È l'idea di portare la luce dove si desidera, partendo da una presa elettrica.

Un progetto semplice, quasi la rivisitazione dei vecchi impianti elettrici. Una spina, un cavo, degli isolatori, un portalampada e una lampadina a LED.

Disponibile anche nella versione outdoor.

Premio Design Plus 2014

NEURO

Suspension / Direct / Indoor

Material

Metal

Finish


.03 Matt White

.04 Matt Black

Note

Suspension luminaire. Five cable clamps included. Matt white cable clamps and white cable for the matt white finish. Matt black cable clamps and black cable for the matt black finish.

Apparecchio illuminante a sospensione. Cinque bloccacavo inclusi. Bloccacavo bianco opaco e cavo bianco per la finitura bianco opaco. Bloccacavo nero opaco e cavo nero per la finitura nero opaco.



NEURO

Max 15W - E27

100-240V - 50/60Hz

ON/OFF

Bulb not included

CE IP20

Matt White - ON/OFF

Matt Black - ON/OFF

1A0160300.00.00

1A0160400.00.00

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



Wall and ceiling rose / Rosone da parete e soffitto

Not included

Matt White

1X0030300.01.00

Matt Black

1X0030400.01.00



Cable clamp / Bloccacavo

Included

Matt White

1 Piece

1X0110300.02.00

Matt Black

1 Piece

1X0110400.02.00

Bulbs / Lampadine



LED - E27 - PAR30s

Not included

220-240V - 9,5W - 25°


3000K - 760lm - CRI >80

Energy Efficiency F - Dimmable

1Y0330730

264

265

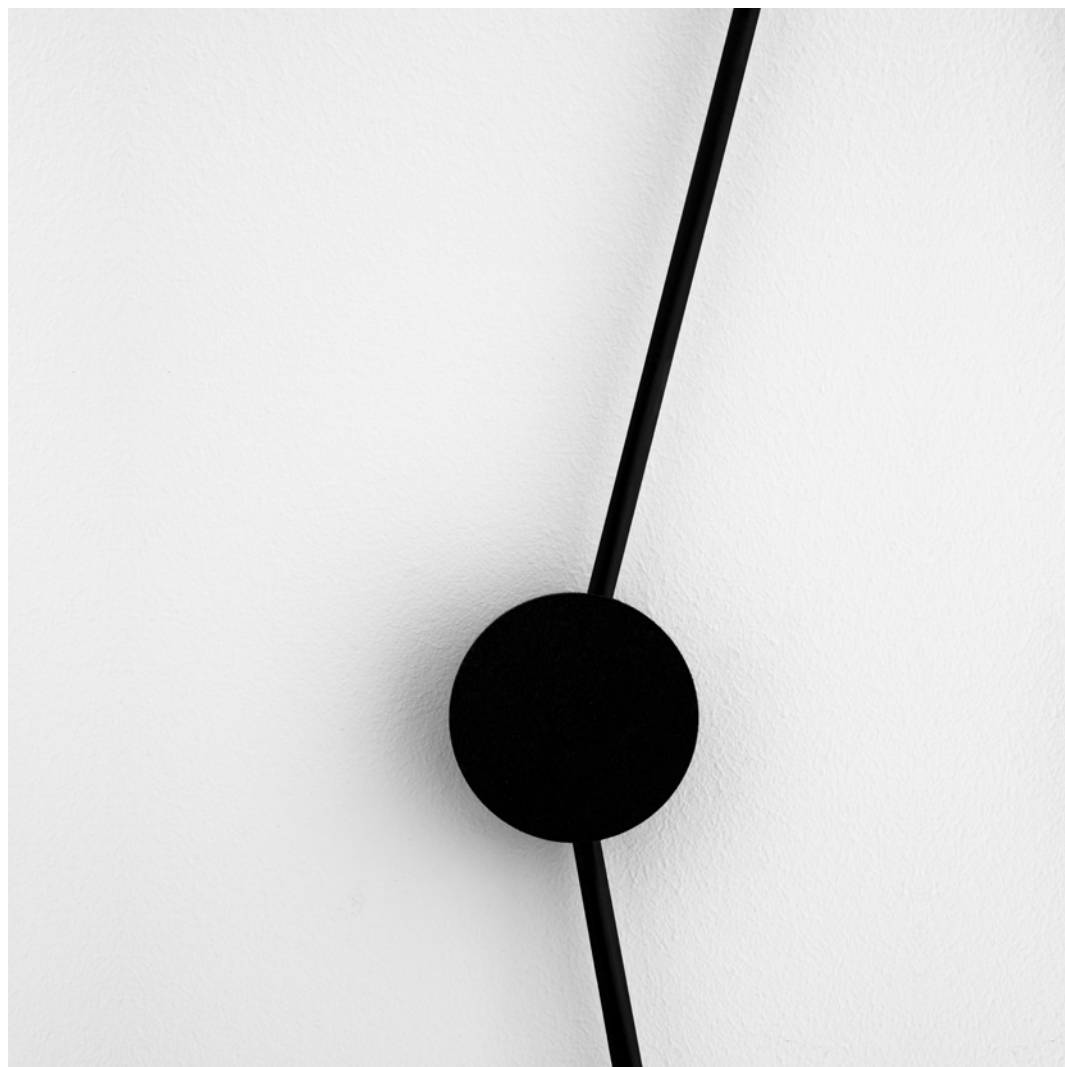

Santa Clara 1728 Hotel
Lisbon



The light in the plate is the most beautiful light.
Light as an ingredient, used courteously but at the same time decisively.

La luce nel piatto è la luce più bella.
Una luce intesa come ingrediente della cucina, usata con garbo,
ma nello stesso tempo con decisione.

OVO

Massimiliano Alajmo - Raffaele Alajmo / 2010

Suspension / Direct / Indoor

Material	Metal
Finish	.03 Matt White

Note Suspension luminaire. Matt white rose. White cable. *Apparecchio illuminante a sospensione. Rosone bianco opaco. Cavo bianco.*



OVO
Max 20W - GU4 - 12V
230-240V - 50/60Hz
ON/OFF
Bulb not included
 **IP20**   0.5 m

Matt White - ON/OFF

1A2890300.00.00

Optional accessories / Accessori opzionali

Bulbs / Lampadine



LED - GU4 - MR11

12V - 4W - 24°
2700K - 200lm - CRI >80
Energy Efficiency G

1Y0330450

Not included





OVONELPIATTO

Massimiliano Alajmo - Raffaele Alajmo / 2010

The light in the plate is the most beautiful light.
Light as an ingredient, used courteously but at the same time decisively.

La luce nel piatto è la luce più bella.
Una luce intesa come ingrediente della cucina, usata con garbo,
ma nello stesso tempo con decisione.

OVONELPIATTO

Massimiliano Alajmo - Raffaele Alajmo / 2010

Suspension / Direct / Indoor

Material Metal
Finish .03 Matt White

Note Suspension luminaire. Matt white rose. White cable. *Apparecchio illuminante a sospensione. Rosone bianco opaco. Cavo bianco.*



OVONELPIATTO
Max 20W - GU4 - 12V
230-240V - 50/60Hz
ON/OFF
Bulb not included
CE IP20 0,5 m

Matt White - ON/OFF

1A2880300.00.00

Optional accessories / Accessori opzionali

Bulbs / Lampadine



LED - GU4 - MR11

Not included

12V - 4W - 24°
2700K - 200lm - CRI >80
Energy Efficiency G

1Y0330450





REFLEX S

Michele Groppi / 2023

A powerful LED and a subtle mirror.
A magic and almost invisible lighting solution,
which provides an indirect light that multiplies spaces
and gives the eye unprecedented perspectives, unexpected depths, illusions of light.
Wall version also available.
Luminaire designed also to be powered by ENDLESS conductive tape.

Un LED potente, uno specchio sottile.
Un apparecchio magico e quasi invisibile per una luce che moltiplica gli spazi
e regala allo sguardo prospettive inedite, profondità impreviste, illusioni di luce.
Disponibile anche nella versione da parete.
Apparecchio illuminante alimentabile anche con il tape conduttivo ENDLESS.



Suspension / Indirect / Indoor


Material Metal - Mirror
Finish .04 Matt Black

Note



Suspension luminaire. Plane with mirror finish. Matt black rear plane. Matt white rose. AISI 304 stainless steel suspension cables. Black cable. REFLEX S 2: version with power cable only and without rose. Possibility for the luminaire to be powered by ENDLESS conductive tape and by dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS.

Apparecchio illuminante a sospensione. Piano con finitura a specchio. Retro del piano nero opaco. Rosone bianco opaco. Cavi di sospensione in inox AISI 304. Cavo nero. REFLEX S 2: versione con solo il cavo di alimentazione e senza rosone. Alimentabile anche con il tape conduttivo ENDLESS e tensione/corrente dedicata (Max 48V DC - Max 150W - Max 4A). Vedi pagina ENDLESS.

	REFLEX S 1 Ceiling driver version 56W 220-240V - 50/60Hz 2700K - 6136lm / 3000K - 6326lm CRI >90 Driver integrated TRIAC/IGBT CE IP20	Matt Black - 2700K - TRIAC/IGBT Matt Black - 3000K - TRIAC/IGBT 1A4790400.27.02 1A4790400.30.02
	REFLEX S 1 Ceiling driver version 56W 110-240V - 50/60Hz 2700K - 6136lm / 3000K - 6326lm CRI >90 Driver integrated DALI - PUSH - 1-10V CE IP20	Matt Black - 2700K - DALI - PUSH - 1-10V Matt Black - 3000K - DALI - PUSH - 1-10V 1A4790400.27.07 1A4790400.30.07


	REFLEX S 2 Remote driver version 50W Max 1400mA DC 2700K - 6136lm / 3000K - 6326lm CRI >90 Driver not included CE IP20 ENEC	Matt Black - 2700K Matt Black - 3000K 1A4790400.27.20 1A4790400.30.20
---	--	---

Compulsory accessories / Accessori obbligatori


Drivers / Alimentatori			
	Driver / Alimentatore 220-240V(110-120V)	1400mA/55W(40W)/IP20/DALI - PUSH - 1-10V	Not included
	Driver / Alimentatore 220-240V	1400mA/50W/IP20/TRIAC - PUSH	Not included

Optional accessories / Accessori opzionali


Suspension kits / Kit di sospensione




Sloped ceiling suspension kit / Kit di sospensione per soffitto inclinato			Not included
	Nickel plated - 1 Piece	REFLEX S 1	1A0510000.00.00




Recessed suspension kit for 12,5 mm plasterboard / Kit di sospensione da incasso per cartongesso 12,5 mm			Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000300.03.00
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000400.03.00
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	REFLEX S 2	1X0000300.04.00
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	REFLEX S 2	1X0000400.04.00



Ceiling suspension kit / Kit di sospensione da soffitto			Not included
Matt White	For suspension cables - 1 Piece		1X0010300.03.00
Matt Black	For suspension cables - 1 Piece		1X0010400.03.00
Matt White	For electrical cables - 1 Piece	REFLEX S 2	1X0010300.04.00
Matt Black	For electrical cables - 1 Piece	REFLEX S 2	1X0010400.04.00



Wall adapter plate / Piastra di adattamento da parete			Not included
Matt White	For mounting on brick masonry walls		1X0050300.01.00

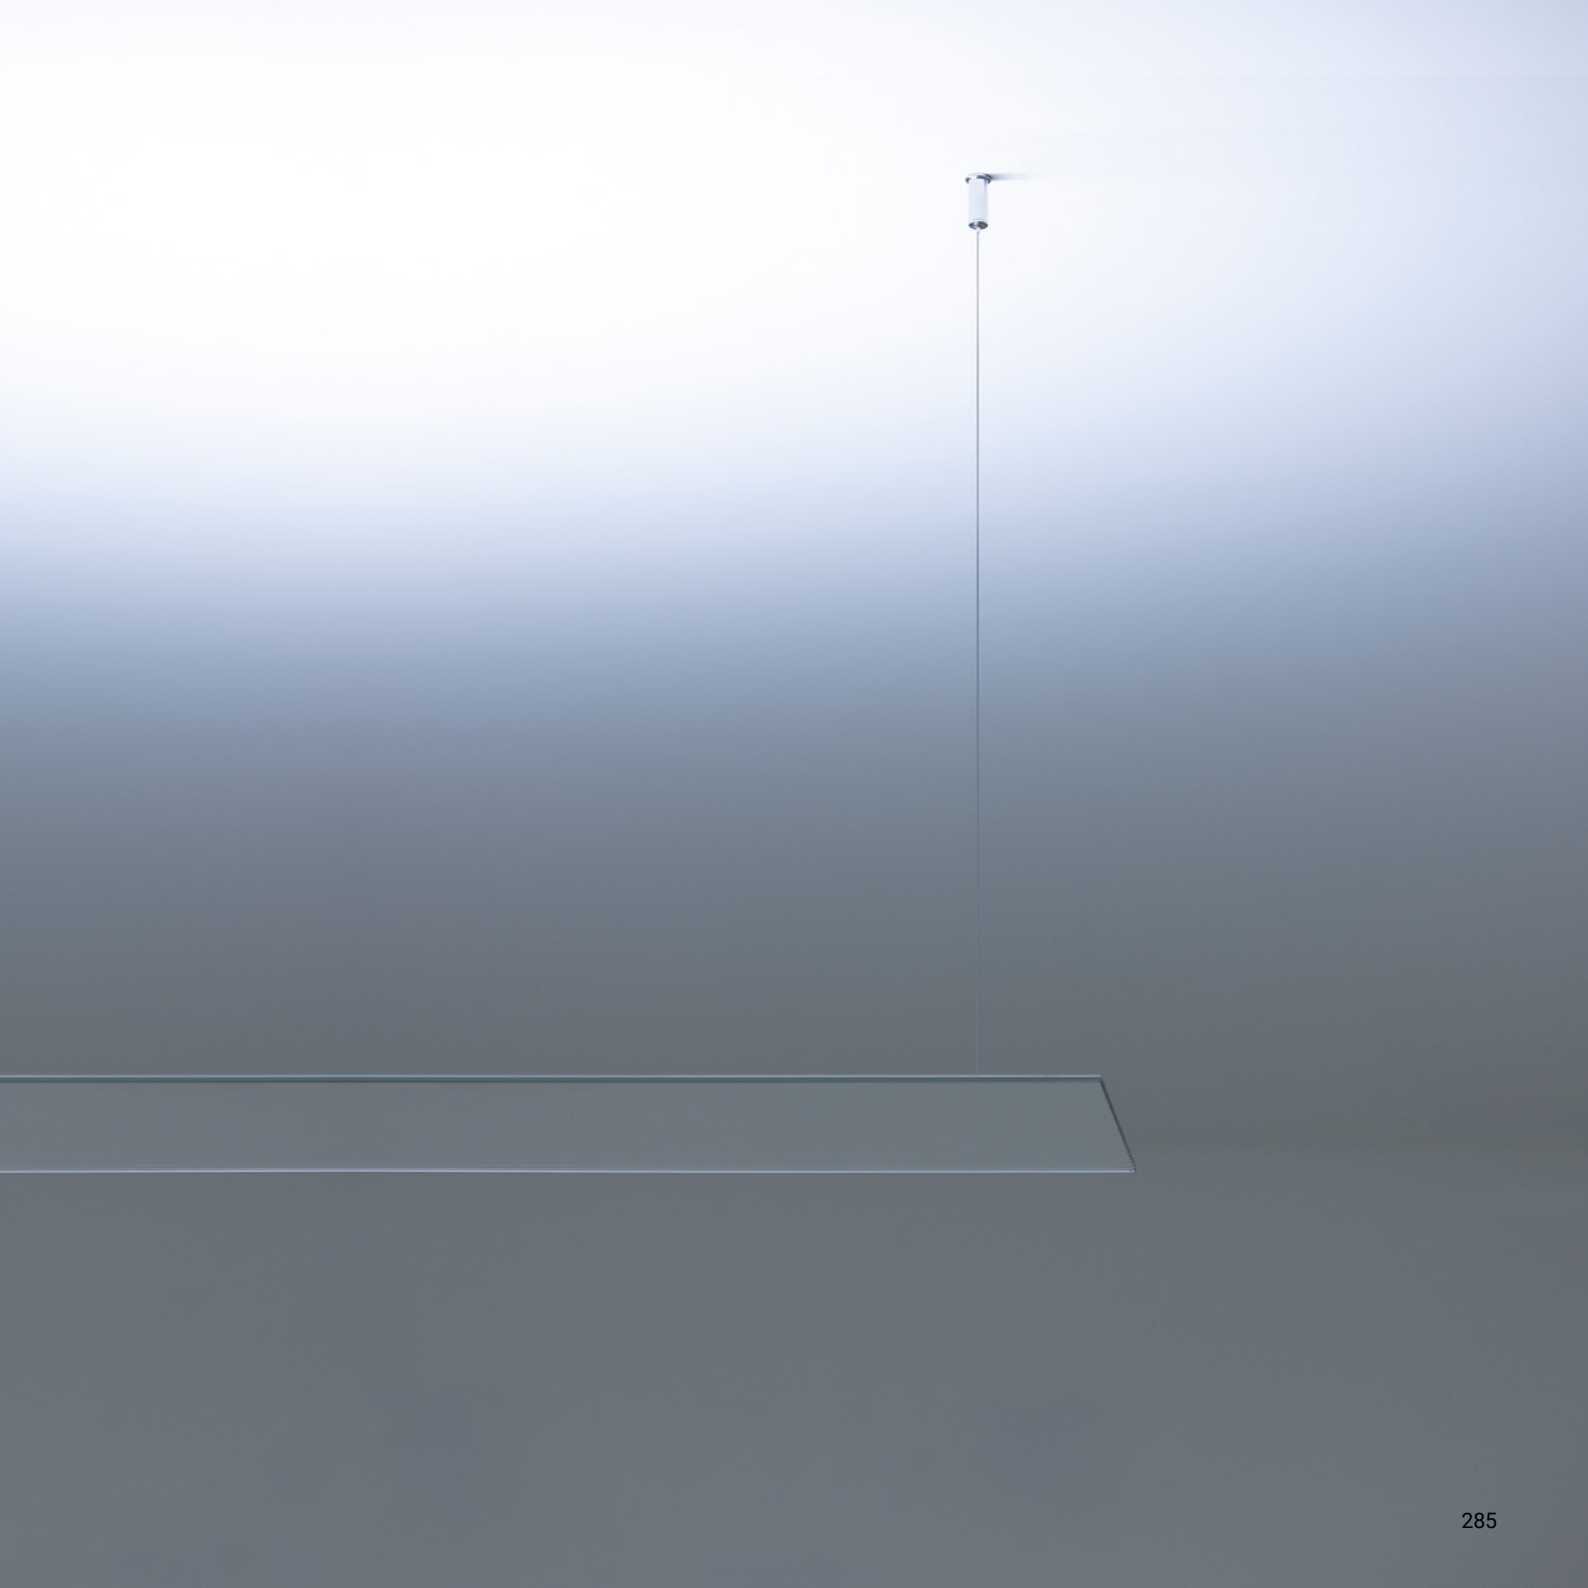



SHANGHAI

Davide Groppi / 2013

The smallest possible shape.
A suspended luminous segment.
Beautiful by itself or in composition.
Suitable for working area or kitchen.
Luminaire designed also to be powered by ENDLESS conductive tape.

La forma minima possibile.
Un segmento luminoso sospeso.
Bellissima da sola o in composizione.
Per i luoghi di lavoro o per la cucina.
Apparecchio illuminante alimentabile anche con il tape conduttivo ENDLESS.

Suspension / Direct / Indoor			
Material	Metal - Methacrylate		
Finish	.03 Matt White	.08 Brushed Brass	
Note	Suspension luminaire. Matt white rose. AISI 304 stainless steel suspension cables. Transparent cable. SHANGHAI 2: version with power cable only and without rose. Possibility for the luminaire to be powered by ENDLESS conductive tape and by dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS.		

	SHANGHAI 1 Ceiling driver version 15,5W 110-240V - 50/60Hz 2700K - 592lm / 3000K - 619lm CRI >90 Driver integrated PUSH CE IP20		
	Matt White - 2700K - PUSH Matt White - 3000K - PUSH Brushed Brass - 2700K - PUSH Brushed Brass - 3000K - PUSH	1A3260300.27.04 1A3260300.30.04 1A3260800.27.04 1A3260800.30.04	
	SHANGHAI 2 Remote driver version 13W 24V DC 2700K - 592lm / 3000K - 619lm CRI >90 Driver not included CE IP20 IE		
	Matt White - 2700K Matt White - 3000K Brushed Brass - 2700K Brushed Brass - 3000K	1A3260300.27.20 1A3260300.30.20 1A3260800.27.20 1A3260800.30.20	

Compulsory accessories / Accessori obbligatori			
Drivers / Alimentatori			
	Driver / Alimentatore	Not included	
	220-240V(100-127V) 24V/16W(15W)/IP20/DALI	SHANGHAI 2	1Z0241180.24
	Driver / Alimentatore	Not included	
	220-240V(100-127V) 24V/20W(15W)/IP20/PUSH - 1-10V	SHANGHAI 2	1Z0240870.24
	Driver / Alimentatore	Not included	
	220-240V 24V/20W/IP20/TRIAC/IGBT	SHANGHAI 2	1Z0240850.24
Optional accessories / Accessori opzionali			
Suspension kits / Kit di sospensione			
	Sloped ceiling suspension hook / Gancio di sospensione per soffitto inclinato	Not included	
	Chrome plated - 1 Piece	SHANGHAI 1	1A0530000.00.00
	Recessed suspension kit for 12,5 mm plasterboard / Kit di sospensione da incasso per cartongesso 12,5 mm	Not included	
	Matt White For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000300.01.00
	Matt Black For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000400.01.00
	Matt White For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	SHANGHAI 2	1X0000300.04.00
	Matt Black For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	SHANGHAI 2	1X0000400.04.00
	Ceiling suspension kit / Kit di sospensione da soffitto	Not included	
	Matt White For suspension cables - 1 Piece		1X0010300.01.00
	Matt Black For suspension cables - 1 Piece		1X0010400.01.00
	Matt White For electrical cables - 1 Piece	SHANGHAI 2	1X0010300.04.00
	Matt Black For electrical cables - 1 Piece	SHANGHAI 2	1X0010400.04.00
	Wall adapter plate / Piastra di adattamento da parete	Not included	
	Matt White For mounting on brick masonry walls		1X0050300.01.00

SIMBIOSI

Davide Groppi / 2015



A de-structured chandelier that can be re-assembled as you like.
A conjuring trick that gives you the possibility of connecting the diodes in series
using very weak electric currents with wires that are practically invisible.
The very thin wire that connects the light sources and brings them alive,
one in relation to the other, is the principal component of this project.

Un lampadario destrutturato e componibile a piacere.
Un piccolo gioco di prestigio sfruttando la possibilità di collegare i diodi in serie
utilizzando correnti elettriche molto basse e quindi cavi quasi invisibili.
Il filo, sottilissimo, che unisce i corpi e li fa vivere l'uno in funzione dell'altro,
è la caratteristica principale di questo progetto.

SIMBIOSI

Suspension / Direct / Indoor

Material

Metal

Finish

.03

Matt White

.19

Polished Gold


.26

Total Black

Note

Suspension luminaire. Matt white rose and red cables for the matt white finish. Matt black rose and anthracite grey cables for the other finishes. AISI 304 stainless steel suspension cables.

Apparecchio illuminante a sospensione. Rosone bianco opaco e cavi rossi per la finitura bianco opaco. Rosone nero opaco e cavi grigio antracite per le altre finiture. Cavi di sospensione in inox AISI 304.



SIMBIOSI

15W

110-240V - 50/60Hz

2700K - 931lm / 3000K - 960lm

CRI >90

Driver integrated

DALI

CE IP20

Matt White - 2700K - DALI

Matt White - 3000K - DALI

Polished Gold - 2700K - DALI

Polished Gold - 3000K - DALI

Total Black - 2700K - DALI

Total Black - 3000K - DALI

1A2870300.27.01


1A2870300.30.01

1A2871900.27.01

1A2871900.30.01

1A2872600.27.01

1A2872600.30.01



SIMBIOSI

16W

110-240V - 50/60Hz

2700K - 931lm / 3000K - 960lm

CRI >90

Driver integrated

PUSH

CE IP20

Matt White - 2700K - PUSH

Matt White - 3000K - PUSH

Polished Gold - 2700K - PUSH

Polished Gold - 3000K - PUSH

Total Black - 2700K - PUSH

Total Black - 3000K - PUSH

1A2870300.27.04

1A2870300.30.04

1A2871900.27.04

1A2871900.30.04

1A2872600.27.04


1A2872600.30.04

Optional accessories / Accessori opzionali

Suspension kits / Kit di sospensione



Sloped ceiling suspension hook / Gancio di sospensione per soffitto inclinato		Not included
Chrome plated - 1 Piece		1A0530000.00.00

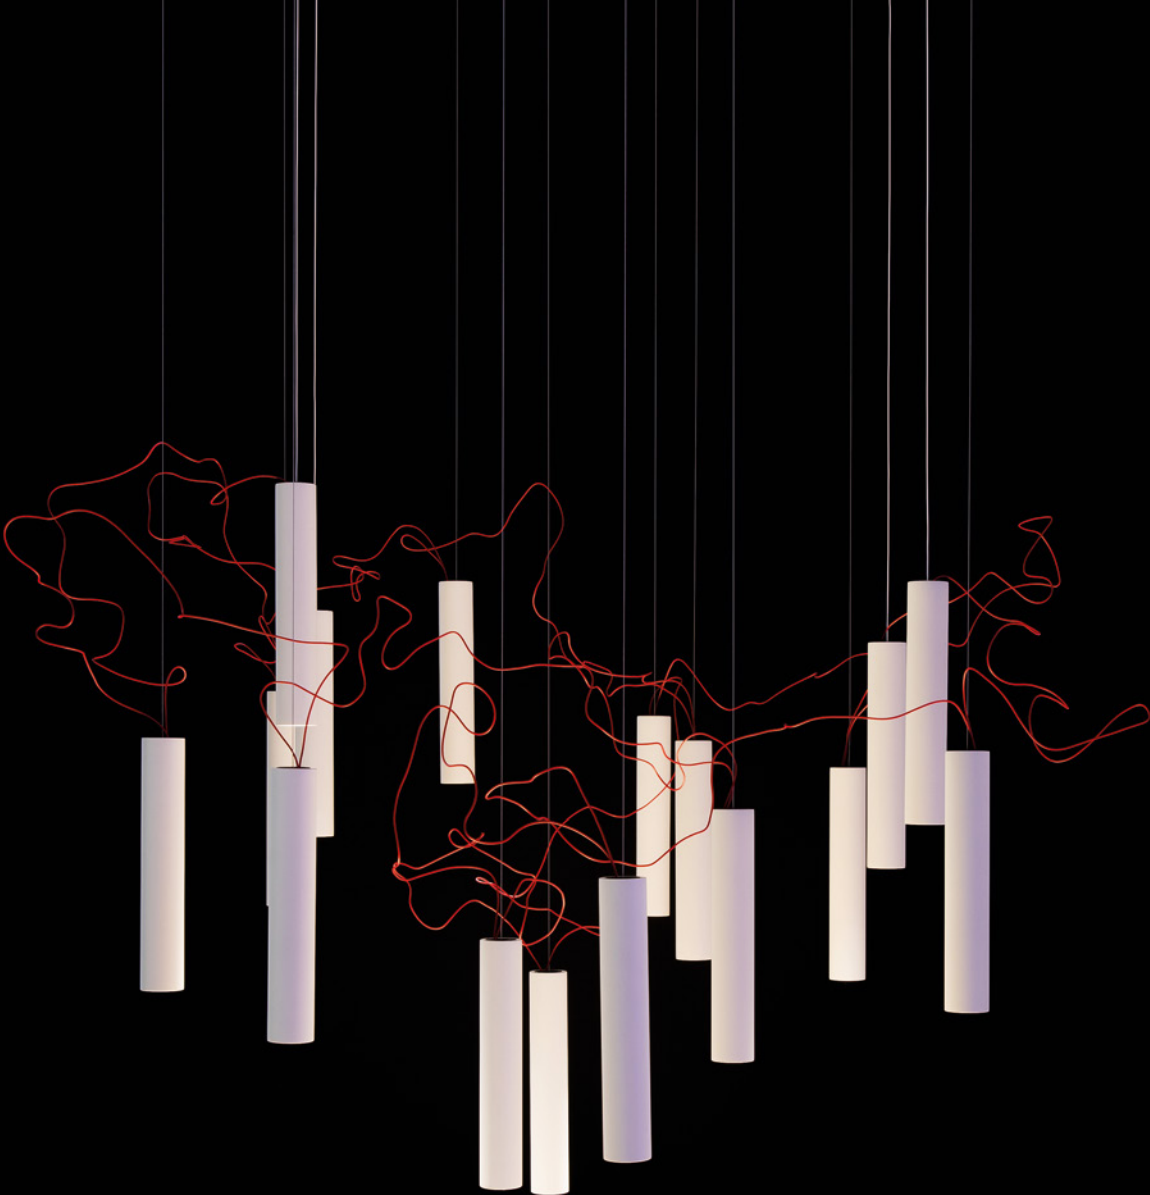



Private Residence
Bologna

SIMBIOSI







SOTTILE

Davide Groppi / 2023


A blade of light just 7 millimetres thick,
the expression of that purest and most essential part of our thought.
The surprise of an extremely thin, yet at the same time very bright, lamp.
Luminaire designed also to be powered by ENDLESS conductive tape.


Una lama di luce spessa solo 7 millimetri,
espressione di una parte del nostro pensiero, quello più puro ed essenziale.
La sorpresa di una lampada estremamente sottile, ma al contempo molto luminosa.
Apparecchio illuminante alimentabile anche con il tape conduttivo ENDLESS.


Suspension / Direct / Indoor


Material	Metal			
Finish	.03 Matt White	.04 Matt Black	.29 Brushed Bronze	.36 Brushed Black

Note	Suspension luminaire. Matt white rose. AISI 304 stainless steel suspension cable. White cable for the matt white finish, black cable for the other finishes. SOTTILE 1 DE and SOTTILE 2 DE: mono on/off and dual emission version. SOTTILE 2 and SOTTILE 2 DE: version with power cable only and without rose. Luminaire designed to be powered by our ENDLESS conductive tape and dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS.			
	Apparecchio illuminante a sospensione. Rosone bianco opaco. Cavo di sospensione in inox AISI 304. Cavo bianco per la finitura bianco opaco e cavo nero per le altre finiture. SOTTILE 1 DE e SOTTILE 2 DE: versione monoaccensione a doppia emissione. SOTTILE 2 e SOTTILE 2 DE: versione con solo il cavo di alimentazione e senza rosone. Alimentabile anche con il tape conduttivo ENDLESS e tensione/corrente dedicata (Max 48V DC - Max 150W - Max 4A). Vedi pagina ENDLESS.			

	SOTTILE 1 Ceiling driver version 21W 220-240V - 50/60Hz 2700K - 693lm / 3000K - 729lm CRI >90 Driver integrated DALI - PUSH - 1-10V - TRIAC	Matt White - 2700K - DALI - PUSH - 1-10V - TRIAC Matt White - 3000K - DALI - PUSH - 1-10V - TRIAC Matt Black - 2700K - DALI - PUSH - 1-10V - TRIAC Matt Black - 3000K - DALI - PUSH - 1-10V - TRIAC Brushed Bronze - 2700K - DALI - PUSH - 1-10V - TRIAC Brushed Bronze - 3000K - DALI - PUSH - 1-10V - TRIAC Brushed Black - 2700K - DALI - PUSH - 1-10V - TRIAC Brushed Black - 3000K - DALI - PUSH - 1-10V - TRIAC	1A4230300.27.05 1A4230300.30.05 1A4230400.27.05 1A4230400.30.05 1A4232900.27.05 1A4232900.30.05 1A4233600.27.05 1A4233600.30.05
	CE IP20		


	SOTTILE 1 DE Ceiling driver version - Dual emission 41W 110-240V - 50/60Hz 2700K - Up 693lm - Down 693lm / 3000K - Up 729lm - Down 729lm CRI >90 Driver integrated DALI - PUSH - 1-10V - TRIAC	Matt White - 2700K - DALI - PUSH - 1-10V - TRIAC Matt White - 3000K - DALI - PUSH - 1-10V - TRIAC Matt Black - 2700K - DALI - PUSH - 1-10V - TRIAC Matt Black - 3000K - DALI - PUSH - 1-10V - TRIAC Brushed Bronze - 2700K - DALI - PUSH - 1-10V - TRIAC Brushed Bronze - 3000K - DALI - PUSH - 1-10V - TRIAC Brushed Black - 2700K - DALI - PUSH - 1-10V - TRIAC Brushed Black - 3000K - DALI - PUSH - 1-10V - TRIAC	1A4640300.27.05 1A4640300.30.05 1A4640400.27.05 1A4640400.30.05 1A4642900.27.05 1A4642900.30.05 1A4643600.27.05 1A4643600.30.05
	CE IP20		

	SOTTILE 2 Remote driver version 19W 24V DC 2700K - 693lm / 3000K - 729lm CRI >90 Driver not included	Matt White - 2700K Matt White - 3000K Matt Black - 2700K Matt Black - 3000K Brushed Bronze - 2700K Brushed Bronze - 3000K Brushed Black - 2700K Brushed Black - 3000K	1A4230300.27.20 1A4230300.30.20 1A4230400.27.20 1A4230400.30.20 1A4232900.27.20 1A4232900.30.20 1A4233600.27.20 1A4233600.30.20
	CE IP20 E		

	SOTTILE 2 DE Remote driver version - Dual emission 2x19W 24V DC 2700K - Up 693lm - Down 693lm / 3000K - Up 729lm - Down 729lm CRI >90 Driver not included	Matt White - 2700K Matt White - 3000K Matt Black - 2700K Matt Black - 3000K Brushed Bronze - 2700K Brushed Bronze - 3000K Brushed Black - 2700K Brushed Black - 3000K	1A4640300.27.20 1A4640300.30.20 1A4640400.27.20 1A4640400.30.20 1A4642900.27.20 1A4642900.30.20 1A4643600.27.20 1A4643600.30.20
	CE IP20 E		

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori




Driver / Alimentatore		Not included
100-240V	24V/50W/IP20/ON/OFF	SOTTILE 2 / SOTTILE 2 DE 1Z1120490


Controller	Not included
DALI - PUSH - 0/1-10V - TRIAC - IP20	SOTTILE 2 / SOTTILE 2 DE 1Z2170010

Optional accessories / Accessori opzionali


Suspension kits / Kit di sospensione




Sloped ceiling suspension hook / Gancio di sospensione per soffitto inclinato		Not included
Chrome plated - 1 Piece	SOTTILE 1 / SOTTILE 1 DE	1A0530000.00.00



Recessed suspension kit for 12,5 mm plasterboard / Kit di sospensione da incasso per cartongesso 12,5 mm		Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000300.01.00
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000400.01.00
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	SOTTILE 2 / SOTTILE 2 DE 1X0000300.04.00
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	SOTTILE 2 / SOTTILE 2 DE 1X0000400.04.00





Ceiling suspension kit / Kit di sospensione da soffitto		Not included
Matt White	For suspension cables - 1 Piece	1X0010300.01.00
Matt Black	For suspension cables - 1 Piece	1X0010400.01.00
Matt White	For electrical cables - 1 Piece	SOTTILE 2 / SOTTILE 2 DE 1X0010300.04.00
Matt Black	For electrical cables - 1 Piece	SOTTILE 2 / SOTTILE 2 DE 1X0010400.04.00



Wall adapter plate / Piastra di adattamento da parete		Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00



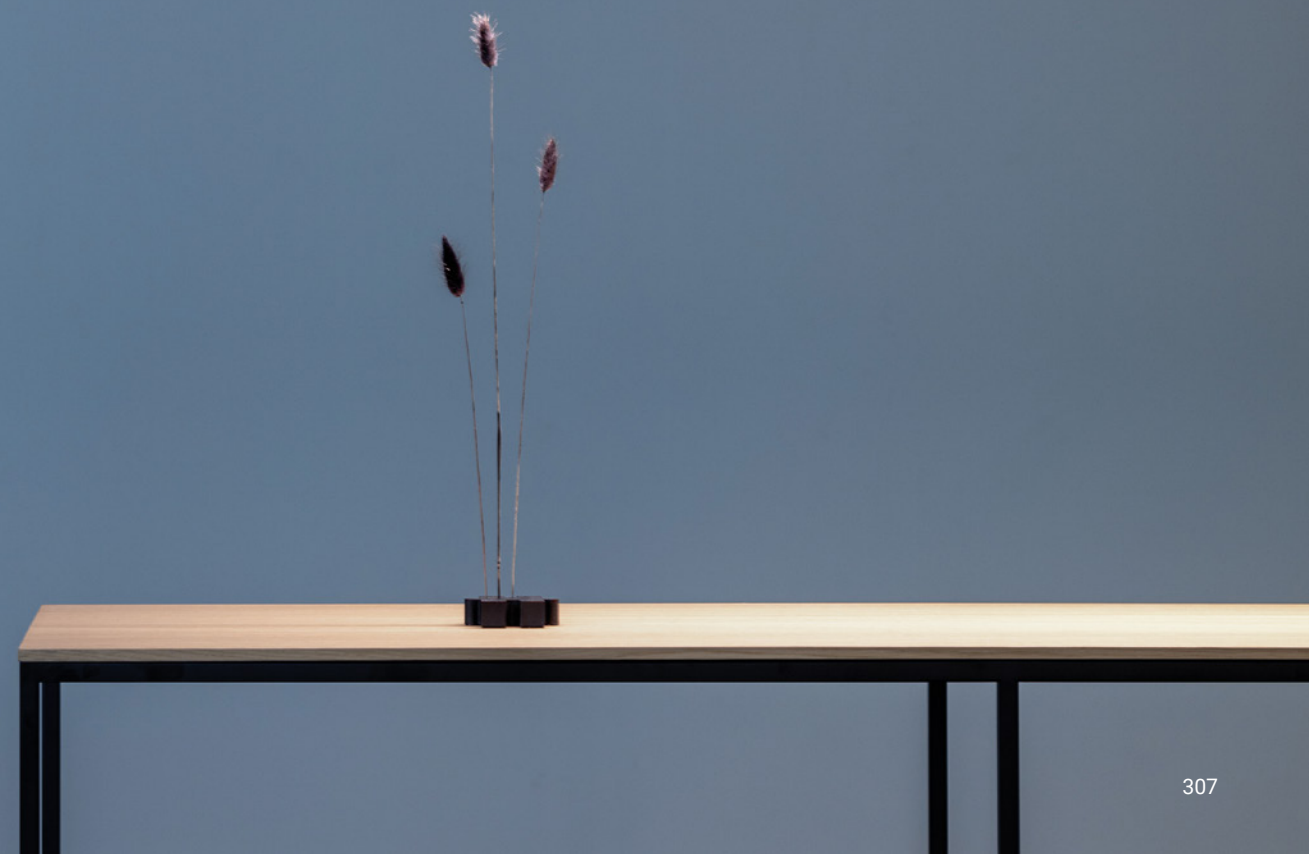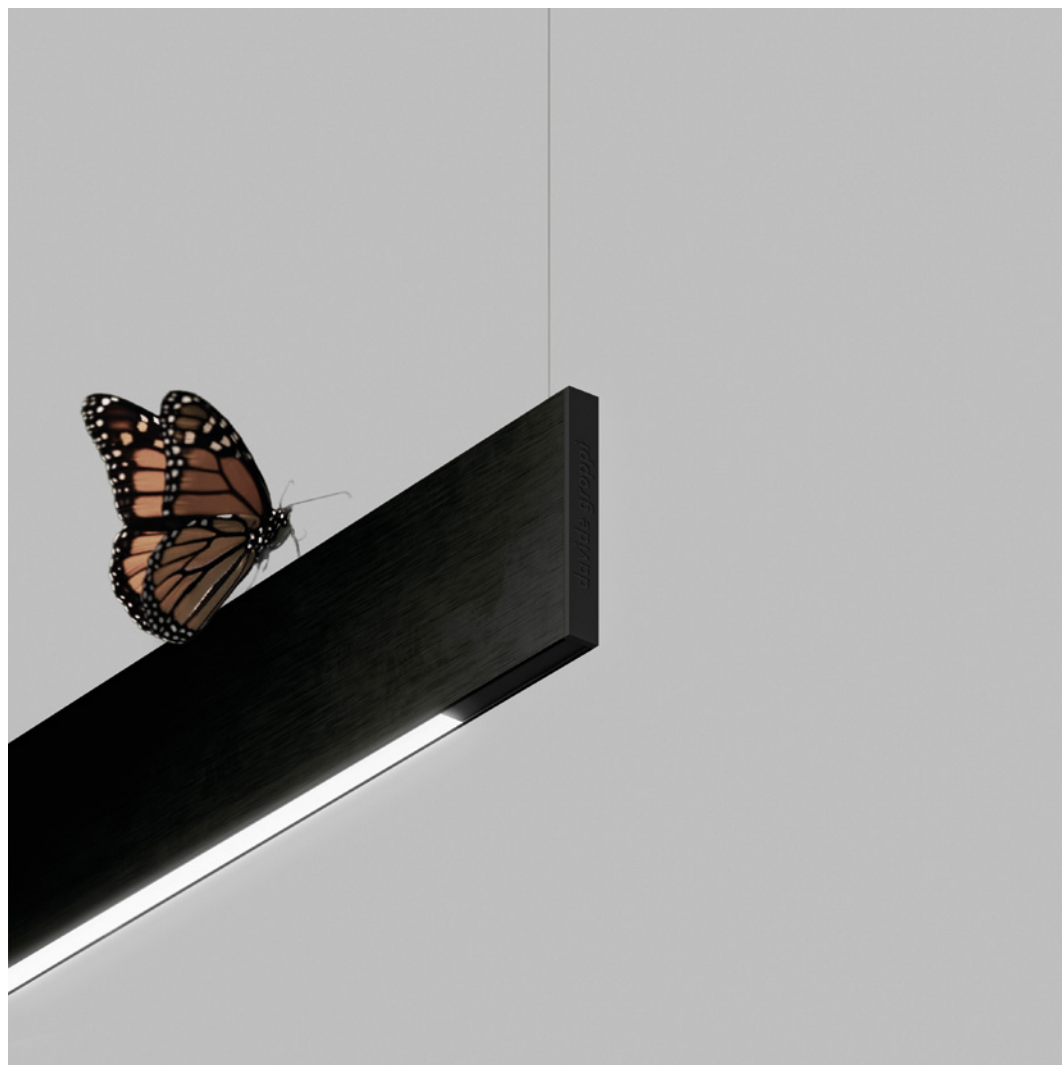



Abba Restaurant
Milano

SOTTILE





SOTTOSOPRA

Davide Groppi / 2023


The purity of the suspended cone encases a small light machine that produces direct, indirect and diffused light at the same time.
Sottosopra: pure, elegant, wonderfully efficient.

La purezza del cono sospeso racchiude una piccola macchina di luce che produce contemporaneamente luce diretta, indiretta e diffusa.
Sottosopra: pura, elegante, meravigliosamente efficiente.

Suspension / Direct-Indirect / Indoor

Material Metal
Finish .03 Matt White


Note Suspension luminaire. Matt white rose. Dual emission and on/off. White cable. SOTTOSOPRA 2: version with power cable only and without rose. *Apparecchio illuminante a sospensione. Rosone bianco opaco. Doppia emissione ed accensione. Cavo bianco. SOTTOSOPRA 2: versione con solo il cavo di alimentazione e senza rosone.*



SOTTOSOPRA 1

Ceiling driver version
27W
220-240V - 50/60Hz
2700K - Up 375lm - Down 366lm /
3000K - Up 387lm - Down 366lm
CRI >90
UGR <19
Driver integrated
TRIAC/IGBT
CE IP20


Matt White - 2700K - TRIAC/IGBT	1A4540300.27.02
Matt White - 3000K - TRIAC/IGBT	1A4540300.30.02



SOTTOSOPRA 1

Ceiling driver version
27W
110-240V - 50/60Hz
2700K - Up 375lm - Down 366lm /
3000K - Up 387lm - Down 366lm
CRI >90
UGR <19
Driver integrated
DALI - PUSH - 1-10V
CE IP20

Matt White - 2700K - DALI - PUSH - 1-10V	1A4540300.27.07
Matt White - 3000K - DALI - PUSH - 1-10V	1A4540300.30.07




SOTTOSOPRA 2

Remote driver version
24W
Max 500mA DC
2700K - Up 375lm - Down 366lm /
3000K - Up 387lm - Down 366lm
CRI >90
UGR <19
Driver not included
2 Drivers required
CE IP20


Matt White - 2700K	1A4540300.27.20
Matt White - 3000K	1A4540300.30.20

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver / Alimentatore				Not included
220-240V	500mA/20W/IP20/TRIAC/IGBT	SOTTOSOPRA 2	1Z0240850.500	



Driver / Alimentatore				Not included
220-240V(110-127V)	500mA/25W(13,5W)/IP20/DALI - PUSH - 1-10V	SOTTOSOPRA 2	1Z0241270.500	


Optional accessories / Accessori opzionali

Suspension kits / Kit di sospensione



Recessed suspension kit for 12,5 mm plasterboard / Kit di sospensione da incasso per cartongesso 12,5 mm				Not included
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	SOTTOSOPRA 2	1X0000300.05.00	
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	SOTTOSOPRA 2	1X0000400.05.00	



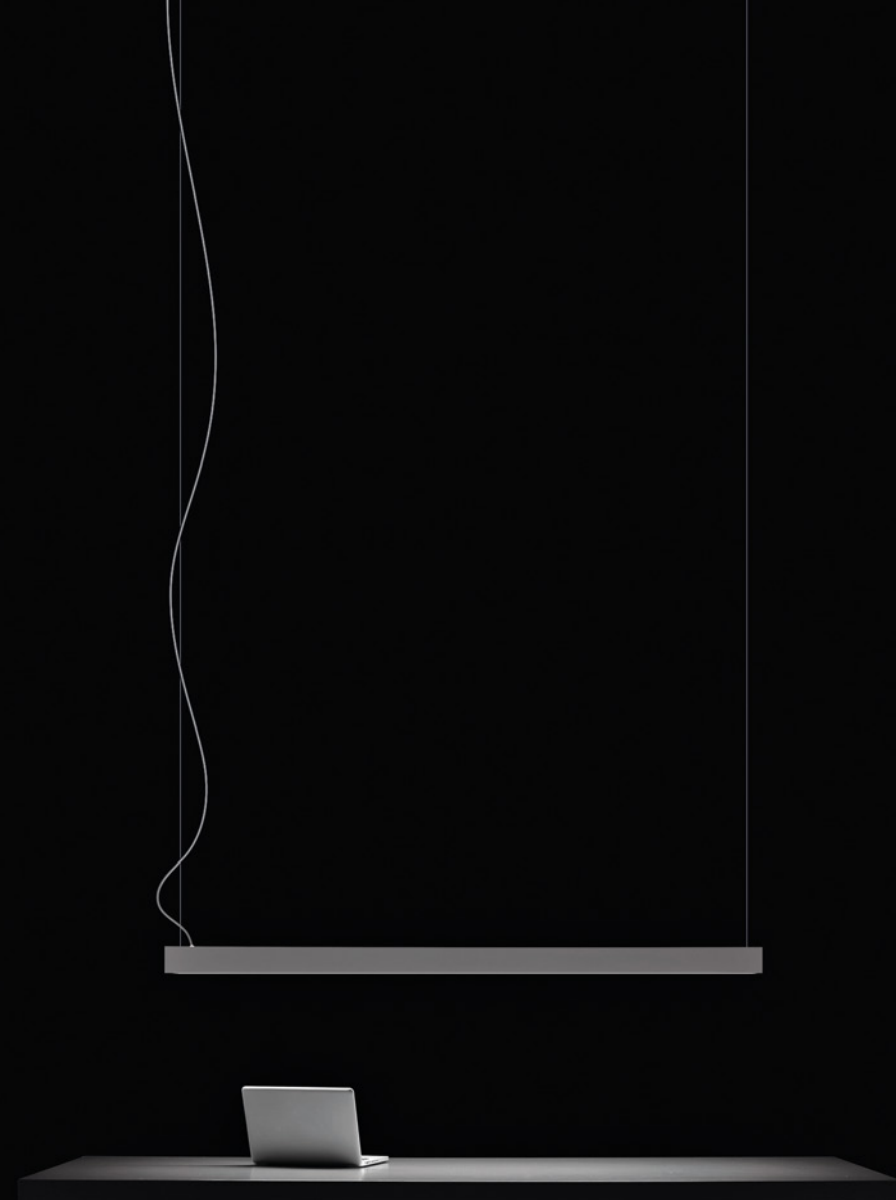


A tool to light.

The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.

Elemento di luce.

Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.
La luce si integra con lo spazio diventando elemento architettonico.

Suspension / Direct / Indoor		
Material	Metal - Polycarbonate	
Finish	.03 Matt White	
Note	Suspension luminaire. Matt white rose. AISI 304 stainless steel suspension cables. White cable.	
	Apparecchio illuminante a sospensione. Rosone bianco opaco. Cavi di sospensione in inox AISI 304. Cavo bianco.	



SPY
39W
110-240V - 50/60Hz
3000K - 4292lm
CRI >80
UGR <19
Driver integrated
DALI
CE IP20

Matt White - 3000K - DALI

1A2910300.30.01


Optional accessories / Accessori opzionali

Suspension kits / Kit di sospensione		
	Sloped ceiling suspension kit / Kit di sospensione per soffitto inclinato	
	Nickel plated - 1 Piece	1A0510000.00.00
	Recessed suspension kit for 12,5 mm plasterboard / Kit di sospensione da incasso per cartongesso 12,5 mm	
	Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm 1X0000300.03.00
	Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm 1X0000400.03.00
	Ceiling suspension kit / Kit di sospensione da soffitto	
	Matt White	For suspension cables - 1 Piece 1X0010300.03.00
	Matt Black	For suspension cables - 1 Piece 1X0010400.03.00
	Wall adapter plate / Piastra di adattamento da parete	
	Matt White	For mounting on brick masonry walls 1X0050300.01.00

WALL / PARETE

DOT P

Omar Carraglia - Davide Groppi / 2015

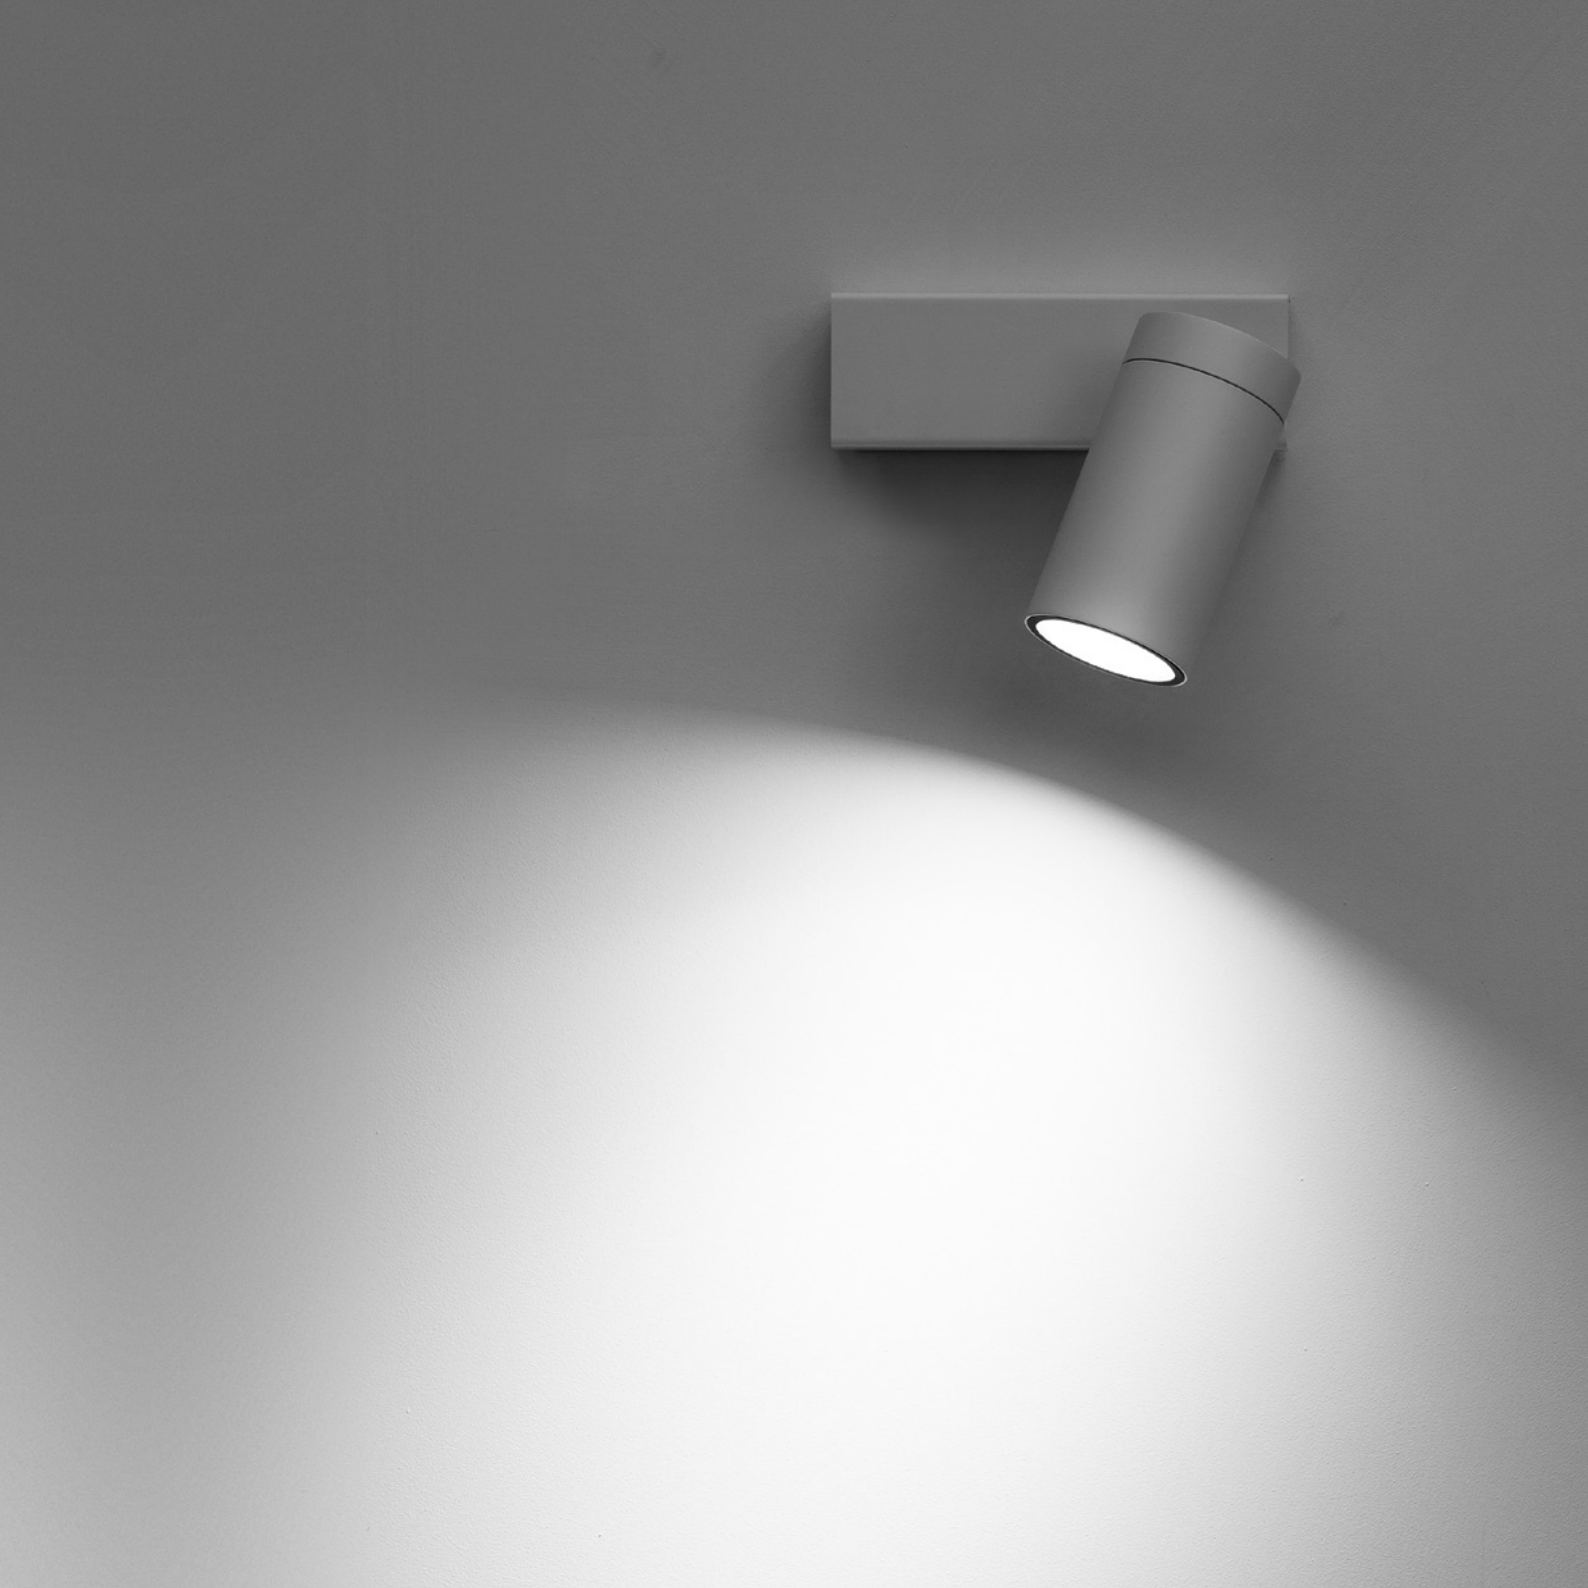

A tool to light.

A luminaire designed for use with state-of-the-art LED modules to offer superior performance and a wide range of light beams.
Luminaire available also in ENDLESS version.


Elemento di luce.

Un apparecchio progettato per utilizzare moduli a LED in grado di fornire prestazioni superiori ed un'ampia gamma di fasci luminosi.
Apparecchio illuminante disponibile anche nella versione ENDLESS.

Wall-Ceiling / Direct / Indoor

Material	Metal		
Finish	.03 Matt White	.04 Matt Black	.49 Matt Black/Polished Gold
Note			
	Wall luminaire. Adjustable in all directions. DOT P DE and DOT P DE 51: dual emission versions. DOT P ENDLESS and DOT P ENDLESS CASAMBI: luminaires dedicated to ENDLESS system (Max 48V DC - Max 150W - Max 4A). They can be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.		

Apparecchio illuminante da parete. Orientabile in tutte le direzioni. DOT P DE e DOT P DE 51: versioni a doppia emissione. DOT P ENDLESS e DOT P ENDLESS CASAMBI: apparecchi illuminanti dedicati al sistema ENDLESS (Max 48V DC - Max 150W - Max 4A) ed utilizzabili, sullo stesso circuito, con i modelli ENDLESS. Vedi pagina ENDLESS.




DOT P 51
Max 10W - GU10
100-240V - 50/60Hz
ON/OFF
Bulb not included



Matt White - ON/OFF
Matt Black - ON/OFF
Matt Black/Polished Gold - ON/OFF

1A2490300.00.00
1A2490400.00.00
1A2494900.00.00




DOT P
13W
100-240V - 50/60Hz
2700K / 3000K
CRI >97
Driver integrated
DALI



Matt White - 2700K - DALI
Matt White - 3000K - DALI
Matt Black - 2700K - DALI
Matt Black - 3000K - DALI
Matt Black/Polished Gold - 2700K - DALI
Matt Black/Polished Gold - 3000K - DALI

1A2340300.27.01
1A2340300.30.01
1A2340400.27.01
1A2340400.30.01
1A2344900.27.01
1A2344900.30.01




DOT P
13W
100-240V - 50/60Hz
2700K / 3000K
CRI >97
Driver integrated
PUSH



Matt White - 2700K - PUSH
Matt White - 3000K - PUSH
Matt Black - 2700K - PUSH
Matt Black - 3000K - PUSH
Matt Black/Polished Gold - 2700K - PUSH
Matt Black/Polished Gold - 3000K - PUSH

1A2340300.27.04
1A2340300.30.04
1A2340400.27.04
1A2340400.30.04
1A2344900.27.04
1A2344900.30.04




DOT P ENDLESS
ENDLESS version only
13W - 0,34A
48V DC
2700K / 3000K
CRI >97
Driver not included
See page ENDLESS



Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K
Matt Black/Polished Gold - 2700K
Matt Black/Polished Gold - 3000K

1A2340300.27.40
1A2340300.30.40
1A2340400.27.40
1A2340400.30.40
1A2344900.27.40
1A2344900.30.40




DOT P ENDLESS CASAMBI
ENDLESS version only
15,5W - 0,4A
48V DC
2700K / 3000K
CRI >97
Driver not included
See page ENDLESS



Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K
Matt Black/Polished Gold - 2700K
Matt Black/Polished Gold - 3000K

1A2340300.27.41
1A2340300.30.41
1A2340400.27.41
1A2340400.30.41
1A2344900.27.41
1A2344900.30.41




DOT P DE

Dual emission
29W
220-240V - 50/60Hz
2700K / 3000K
CRI >97
Driver integrated
DALI



Matt White - 2700K - DALI	1A4900300.27.01
Matt White - 3000K - DALI	1A4900300.30.01
Matt Black - 2700K - DALI	1A4900400.27.01
Matt Black - 3000K - DALI	1A4900400.30.01
Matt Black/Polished Gold - 2700K - DALI	1A4904900.27.01
Matt Black/Polished Gold - 3000K - DALI	1A4904900.30.01



DOT P DE 51

Dual emission
Max 2x10W - GU10
100-240V - 50/60Hz
ON/OFF
Bulb not included



Matt White - ON/OFF	1A3810300.00.00
Matt Black - ON/OFF	1A3810400.00.00
Matt Black/Polished Gold - ON/OFF	1A3814900.00.00

Compulsory accessories / Accessori obbligatori


Other accessories / Altri accessori




Lens / Lente		Not included	
Beam - 14°	2700K - CRI >97 - 983lm	DOT P	1A3090000.00.00
	3000K - CRI >97 - 1038lm		
	2700K - CRI >97 - 983lm	DOT P ENDLESS	
	3000K - CRI >97 - 1038lm		
	2700K - CRI >97 - 983lm	DOT P ENDLESS CASAMBI	
	3000K - CRI >97 - 1038lm		
	2700K - CRI >97 - 1966lm	DOT P DE	
Beam - 24°	3000K - CRI >97 - 2076lm		
	2700K - CRI >97 - 943lm	DOT P	1A3100000.00.00
	3000K - CRI >97 - 996lm		
	2700K - CRI >97 - 943lm	DOT P ENDLESS	
	3000K - CRI >97 - 996lm		
	2700K - CRI >97 - 943lm	DOT P ENDLESS CASAMBI	
	3000K - CRI >97 - 996lm		
Beam - 36°	2700K - CRI >97 - 1886lm	DOT P DE	
	3000K - CRI >97 - 1992lm		
	2700K - CRI >97 - 955lm	DOT P	1A3110000.00.00
	3000K - CRI >97 - 1005lm		
	2700K - CRI >97 - 955lm	DOT P ENDLESS	
	3000K - CRI >97 - 1005lm		
	2700K - CRI >97 - 955lm	DOT P ENDLESS CASAMBI	
Beam - 50°	3000K - CRI >97 - 1005lm		
	2700K - CRI >97 - 1910lm	DOT P DE	
	3000K - CRI >97 - 2010lm		
	2700K - CRI >97 - 965lm	DOT P	1A3120000.00.00
	3000K - CRI >97 - 1016lm		
	2700K - CRI >97 - 965lm	DOT P ENDLESS	
	3000K - CRI >97 - 1016lm		
	2700K - CRI >97 - 965lm	DOT P ENDLESS CASAMBI	
	3000K - CRI >97 - 1016lm		
	2700K - CRI >97 - 1930lm	DOT P DE	
	3000K - CRI >97 - 2032lm		

Optional accessories / Accessori opzionali


Other accessories / Altri accessori




Accessory holder + Honeycomb louvre / Porta accessori + Frangiluce nido d'ape		Not included	
		DOT P / DOT P ENDLESS / DOT P ENDLESS CASAMBI / DOT P DE	1X0080400.01.00




Elliptical filter / Filtro ellittico		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT P / DOT P ENDLESS / DOT P ENDLESS CASAMBI / DOT P DE	1X0080000.02.00



Blue filter / Filtro blu		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT P / DOT P ENDLESS / DOT P ENDLESS CASAMBI / DOT P DE	1X0080000.03.00



Red filter / Filtro rosso		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT P / DOT P ENDLESS / DOT P ENDLESS CASAMBI / DOT P DE	1X0080000.04.00



Yellow filter / Filtro giallo		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT P / DOT P ENDLESS / DOT P ENDLESS CASAMBI / DOT P DE	1X0080000.05.00

Optional accessories / Accessori opzionali

Bulbs / Lampadine



LED - GU10 - PAR16		Not included	
	220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	DOT P 51 / DOT P DE 51	1Y0330500




LED SORAA - GU10 - MR16		Not included	
	230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	DOT P 51 / DOT P DE 51	1Y1580210




LED SORAA - GU10 - MR16		Not included	
	230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	DOT P 51 / DOT P DE 51	1Y1580010


Other accessories / Altri accessori



Darklight		Not included	
	LED SORAA - GU10 - MR16	DOT P 51 / DOT P DE 51	1Y1580040



25° beam filter / Filtro fascio 25°		Not included	
	LED SORAA - GU10 - MR16	DOT P 51 / DOT P DE 51	1Y1580020



36° beam filter / Filtro fascio 36°		Not included	
	LED SORAA - GU10 - MR16	DOT P 51 / DOT P DE 51	1Y1580030





It is pure form.

A tool to light, simple container for the light source.


Light is incorporated into the space, becoming an architectural element.

È forma pura.

Elemento di luce semplice contenitore della fonte luminosa.

La luce si integra con lo spazio diventando elemento architettonico.

Wall / Diffuse / Indoor			
Material	Glass - Metal		
Finish	.03 Matt White	.04 Matt Black	.08 Brushed Brass
Note	Wall luminaire. Dual emission.		
	Apparecchio illuminante da parete. Doppia emissione.		




DUET

23W
220-240V - 50/60Hz
2700K - 1293lm / 3000K - 1352lm
CRI >90
TRIAC/IGBT



Matt White - 2700K - TRIAC/IGBT	1A3300300.27.02
Matt White - 3000K - TRIAC/IGBT	1A3300300.30.02
Matt Black - 2700K - TRIAC/IGBT	1A3300400.27.02
Matt Black - 3000K - TRIAC/IGBT	1A3300400.30.02
Brushed Brass - 2700K - TRIAC/IGBT	1A3300800.27.02
Brushed Brass - 3000K - TRIAC/IGBT	1A3300800.30.02



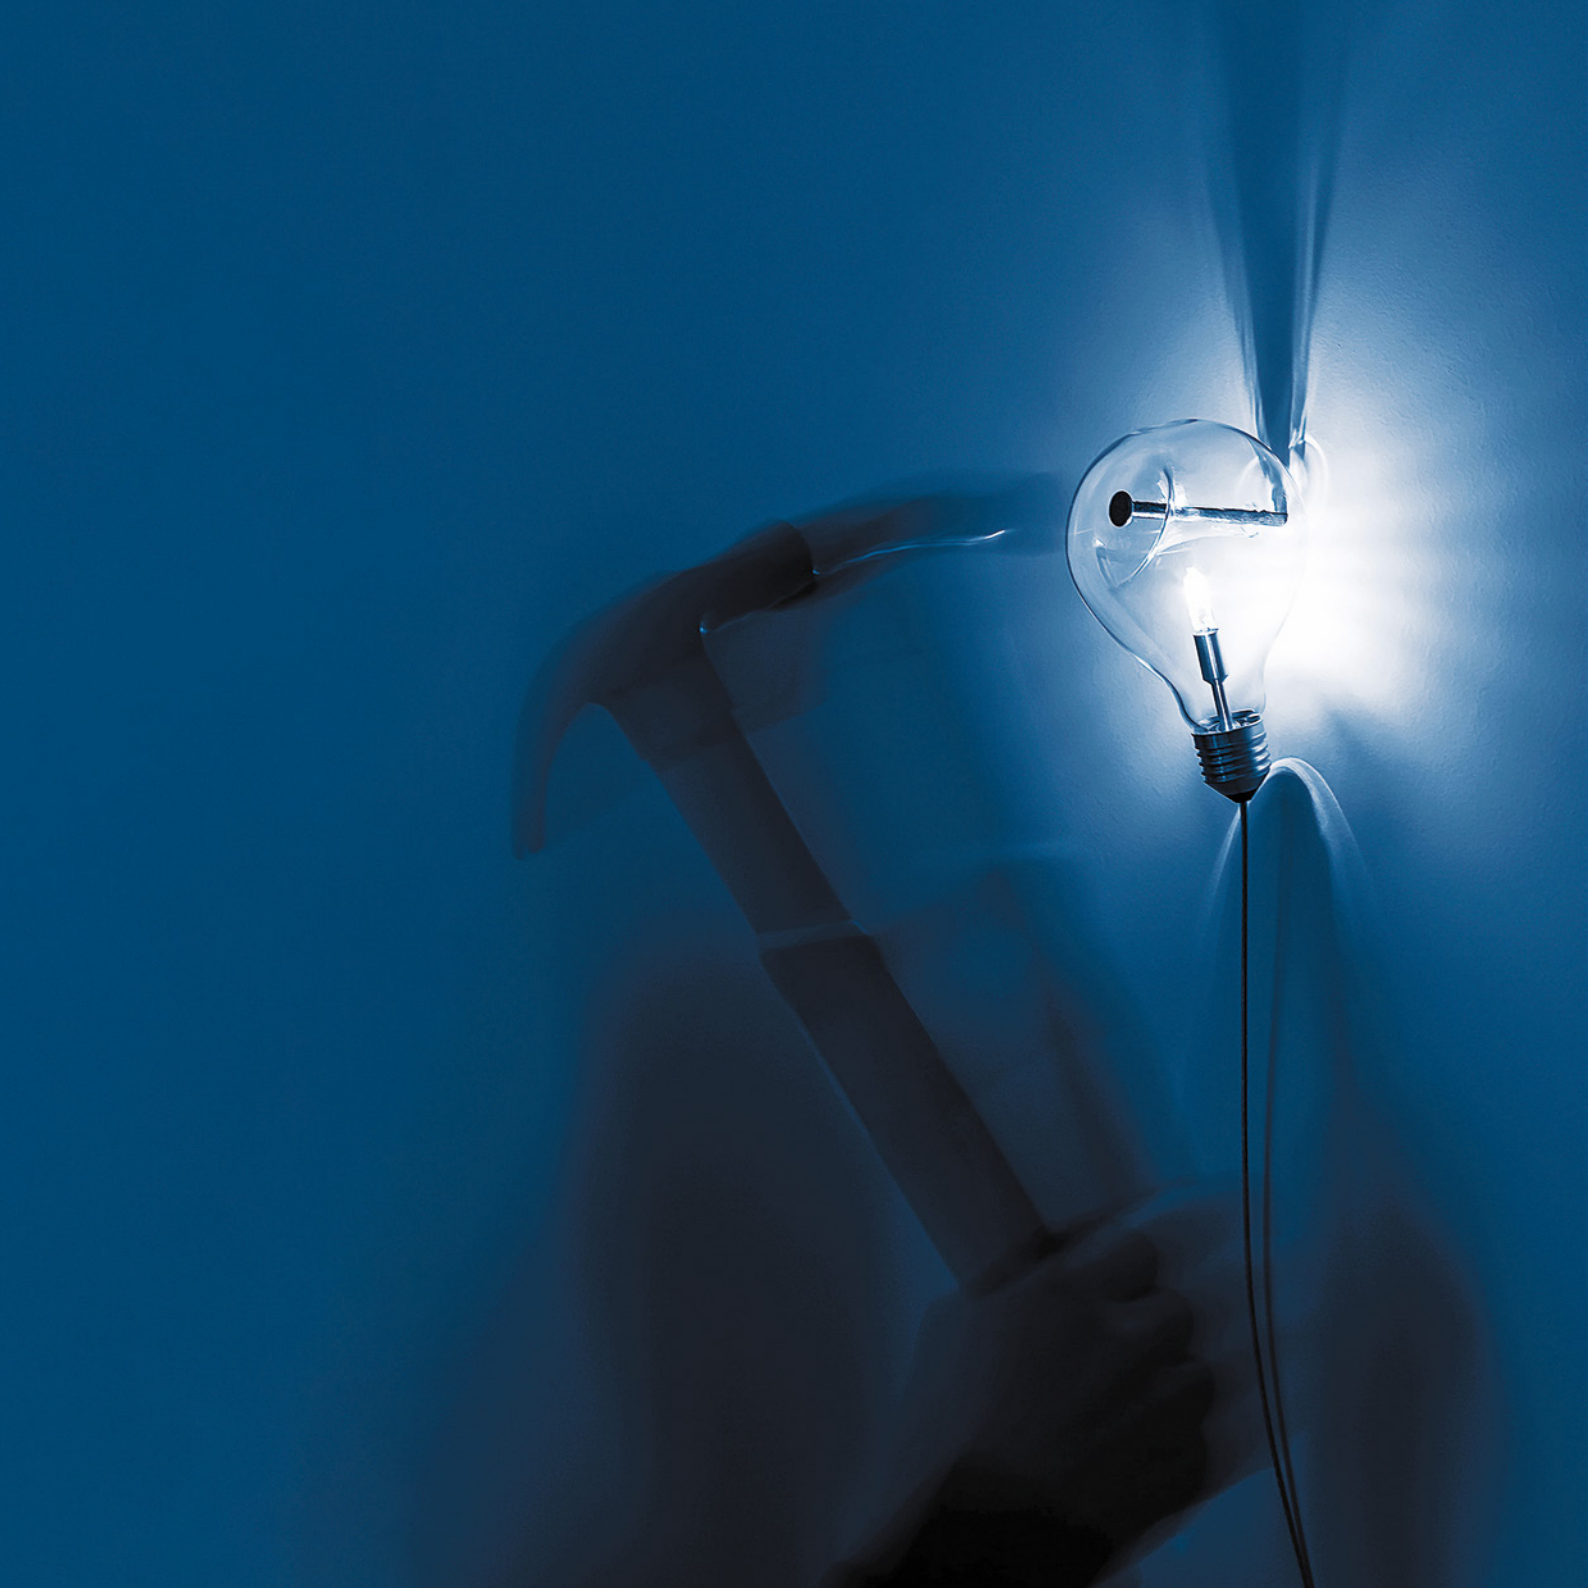

EDISON'S NIGHTMARE

Harry Thaler / 2014

A gestural project, full of irony and nostalgia.

Therefore, among a thousand stories, prohibitions, absurd technical rules, we have reached the end. The end of the incandescent bulb.

Edison's Nightmare is a salute to Edison's light bulb*, a dream that changed the way we live forever, stealing time to read and write from sleep.

It is a classic light bulb, nailed to the wall. Like a work of art.

** From 01 September 2012, incandescent bulbs cannot be sold in the EU.*

Un progetto gestuale, carico di ironia e nostalgia.

E così, tra mille vicende, divieti, assurde norme tecniche, siamo arrivati alla fine.


Alla fine della lampadina a incandescenza.

Edison's Nightmare è un saluto alla lampadina di Edison*, ad un sogno che ha cambiato per sempre il modo di vivere, sottraendo al sonno ore da dedicare a lettura e scrittura.


Si tratta di una classica lampadina inchiodata al muro. Come un'opera d'arte.

** Dal 1 Settembre 2012 non è più possibile, nella Comunità Europea, vendere lampadine ad incandescenza.*

EDISON'S NIGHTMARE		Harry Thaler / 2014
Wall / Diffuse / Indoor		
Material	Blown glass - Metal	
Finish	.00 Standard	
Note	Wall luminaire. Blown glass diffuser. Dimmer on the cable. Transparent cable. <i>Apparecchio illuminante da parete. Diffusore in vetro soffiato. Dimmer lungo il cavo. Cavo trasparente.</i>	

	EDISON'S NIGHTMARE		
	Max 10W - G4 - 12V		
	100-240V - 50/60Hz		
	Driver integrated		
	Dimmer on board		
	Bulb included		
	CE IP20		
		Standard - Dimmer on board	1A3380000.00.06



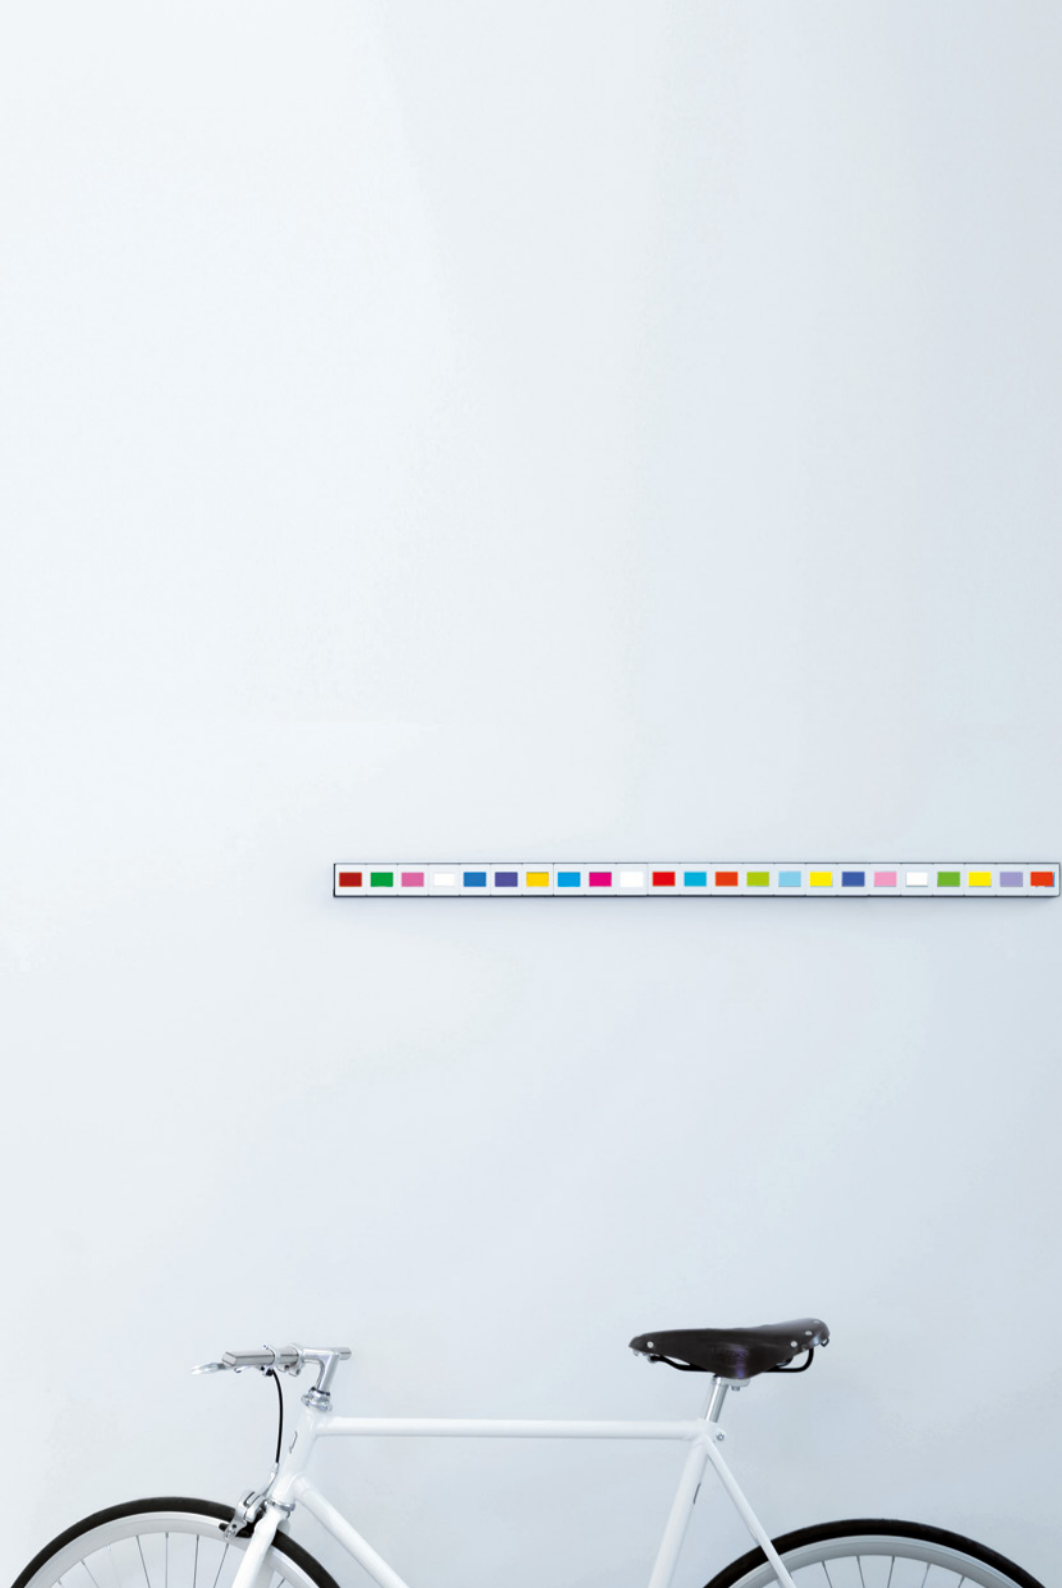

A luminous short film.

Telling a story in light, a series of old 35MM slides are lit from behind, pulsating and shown at random.

The photographs can be assembled and replaced as you like.

The choice of the message to be communicated is completely personal: it can be an image, a logo, a sentence, anything you want to represent, at any time. The light message is punctuated by a blinking LED, offering reading in movement.

Un cortometraggio luminoso.

Per raccontare una storia con la luce, retroilluminando in modo pulsante e casuale le vecchie diapositive da 35MM.

Le fotografie possono essere montate e sostituite a piacimento.


La scelta del messaggio da comunicare è del tutto personale: può essere un'immagine, un logo, una frase, tutto ciò che al momento si vuole rappresentare.

Il messaggio luminoso, ritmato attraverso la diversa intermittenza dei LED, permette una lettura in movimento.

Objects-Wall / Diffuse / Indoor

Material Metal - Polycarbonate
Finish .00 Standard

Note Modular wall luminaire. Matt black support. Customised images not included. Module connector included. Black cable. *Apparecchio illuminante da parete componibile. Supporto nero opaco. Immagini personalizzabili non incluse. Connettore moduli incluso. Cavo nero.*



FILM
3W
5V DC
Driver not included
ON/OFF
CE IP20


Standard - ON/OFF

| 1A3410000.00.00 |




Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver with plug / Alimentatore con spina			Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 15W - IP40	1Z1470180	



Driver / Alimentatore			Not included
100-240V	5V/17,5W/IP20/ON/OFF	1Z1120180	




FOIL

967ARCH / 2011

An architectural lamp for wall and ceiling installation.
Although it's there, you can't see the thickness.
A luminaire that amazes with skill, so you only notice its two-dimensional effect.

Lampada architettuale, da installare sia a parete che a soffitto.
Lo spessore c'è, ma non si vede. Apparecchio efficace e stupendo
nel momento in cui si coglie solo l'aspetto bidimensionale.

Wall / Indirect / Indoor			
Material	Metal		
Finish	.03 Matt White	.04	Matt Black
Note	Wall luminaire.		
		Apparecchio illuminante da parete.	



FOIL

24,5W
220-230V - 50/60Hz
2700K - 1681lm / 3000K - 1808lm
CRI >90
TRIAC/IGBT
CE IP20

Matt White - 2700K - TRIAC/IGBT
Matt White - 3000K - TRIAC/IGBT
Matt Black - 2700K - TRIAC/IGBT
Matt Black - 3000K - TRIAC/IGBT

1A3150300.27.02
1A3150300.30.02
1A3150400.27.02
1A3150400.30.02




An indirect wall light project.
The light source remains invisible while the light comes out soft from the metal diffuser,
creating a delicate atmosphere.

Un lavoro sulla luce indiretta da parete.
La sorgente rimane invisibile mentre la luce esce morbida dal diffusore metallico,
creando un'atmosfera delicata.

FOLDER

967ARCH / 2013

Wall / Indirect / Indoor		
Material	Metal	
Finish	.03 Matt White	
Note	Wall luminaire.	Apparecchio illuminante da parete.



FOLDER

20W
110-240V - 50/60Hz
2700K - 397lm / 3000K - 415lm
CRI >80
Driver integrated
DALI
CE IP20

Matt White - 2700K - DALI
Matt White - 3000K - DALI

1A3350300.27.01
1A3350300.30.01





FOLDER

502

DO NOT
DISTURB

Golden Crown Hotel
Prague





LINET

Omar Carraglia / 2014

A tool to light.

The luminaire is pure form, a simple container for the light source.

Single-emission lamp with light directed downwards.

Light is incorporated into the space, becoming an architectural element.

Elemento di luce.

Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.


Lampada monoemissione con luce direzionata verso il basso.

La luce si integra con lo spazio diventando elemento architettonico.

LINET

Omar Carraglia / 2014

Wall / Diffuse / Indoor		
Material	Metal - Methacrylate	
Finish	.03 Matt White	.04 Matt Black
Note	Wall luminaire.	
	Apparecchio illuminante da parete.	



LINET
11,5W
220-240V - 50/60Hz
2700K - 626lm / 3000K - 655lm
CRI >90
TRIAC/IGBT
CE IP20

Matt White - 2700K - TRIAC/IGBT	1A3310300.27.02
Matt White - 3000K - TRIAC/IGBT	1A3310300.30.02
Matt Black - 2700K - TRIAC/IGBT	1A3310400.27.02
Matt Black - 3000K - TRIAC/IGBT	1A3310400.30.02






MIRA

Omar Carraglia / 2012

Lamp with a simple and essential shape.
For interiors and adjustable.
Luminaire available also in ENDLESS version.


Lampada dalla forma semplice ed essenziale.
Per interni e orientabile.
Apparecchio illuminante disponibile anche nella versione ENDLESS.

Wall-Ceiling / Direct / Indoor			
Material	Metal		
Finish	.03 Matt White	.04 Matt Black	.49 Matt Black/Polished Gold
Note			
	Wall luminaire. Adjustable in all directions. MIRA ENDLESS and MIRA ENDLESS CASAMBI: luminaires dedicated to ENDLESS system (Max 48V DC - Max 150W - Max 4A). They can be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.		
	<i>Apparecchio illuminante da parete. Orientabile in tutte le direzioni. MIRA ENDLESS e MIRA ENDLESS CASAMBI: apparecchi illuminanti dedicati al sistema ENDLESS (Max 48V DC - Max 150W - Max 4A) ed utilizzabili, sullo stesso circuito, con i modelli ENDLESS. Vedi pagina ENDLESS.</i>		




MIRA
8W
110-240V - 50/60Hz
2700K - 327lm / 3000K - 352lm
CRI >90
Driver integrated
PUSH
CE IP20

Matt White - 2700K - PUSH	1A2280300.27.04
Matt White - 3000K - PUSH	1A2280300.30.04
Matt Black - 2700K - PUSH	1A2280400.27.04
Matt Black - 3000K - PUSH	1A2280400.30.04
Matt Black/Polished Gold - 2700K - PUSH	1A2284900.27.04
Matt Black/Polished Gold - 3000K - PUSH	1A2284900.30.04




MIRA SWITCH
8W
110-240V - 50/60Hz
2700K - 327lm / 3000K - 352lm
CRI >90
Driver integrated
ON/OFF
CE IP20

Matt White - 2700K - ON/OFF	1A2280300.27.00
Matt White - 3000K - ON/OFF	1A2280300.30.00
Matt Black - 2700K - ON/OFF	1A2280400.27.00
Matt Black - 3000K - ON/OFF	1A2280400.30.00
Matt Black/Polished Gold - 2700K - ON/OFF	1A2284900.27.00
Matt Black/Polished Gold - 3000K - ON/OFF	1A2284900.30.00




MIRA ENDLESS
ENDLESS version only
6W - 0,16A
48V DC
2700K - 327lm / 3000K - 352lm
CRI >90
Driver not included
See page ENDLESS
CE IP20 ENEC

Matt White - 2700K	1A2280300.27.40
Matt White - 3000K	1A2280300.30.40
Matt Black - 2700K	1A2280400.27.40
Matt Black - 3000K	1A2280400.30.40
Matt Black/Polished Gold - 2700K	1A2284900.27.40
Matt Black/Polished Gold - 3000K	1A2284900.30.40




MIRA
8W
110-240V - 50/60Hz
2700K - 327lm / 3000K - 352lm
CRI >90
Driver integrated
DALI
CE IP20

Matt White - 2700K - DALI	1A2280300.27.01
Matt White - 3000K - DALI	1A2280300.30.01
Matt Black - 2700K - DALI	1A2280400.27.01
Matt Black - 3000K - DALI	1A2280400.30.01
Matt Black/Polished Gold - 2700K - DALI	1A2284900.27.01
Matt Black/Polished Gold - 3000K - DALI	1A2284900.30.01



MIRA ENDLESS CASAMBI
ENDLESS version only
7W - 0,18A
48V DC
2700K - 327lm / 3000K - 352lm
CRI >90
Driver not included
See page ENDLESS
CE IP20 ENEC A

Matt White - 2700K	1A2280300.27.41
Matt White - 3000K	1A2280300.30.41
Matt Black - 2700K	1A2280400.27.41
Matt Black - 3000K	1A2280400.30.41
Matt Black/Polished Gold - 2700K	1A2284900.27.41
Matt Black/Polished Gold - 3000K	1A2284900.30.41







MIRA MAGNETIC

Omar Carraglia / 2015


Lamp with a simple and essential shape.
For interiors and adjustable, it is designed with a magnetic application system
to be even more versatile and functional.

Lampada dalla forma semplice ed essenziale.
Per interni e orientabile, è concepita con un sistema di applicazione magnetico
per essere ancora più versatile e funzionale.

MIRA MAGNETIC



Omar Carraglia / 2015

Wall-Ceiling / Direct / Indoor			
Material	Metal		
Finish	.03 Matt White	.04 Matt Black	.49 Matt Black/Polished Gold
Note	Wall luminaire. Adjustable in all directions. Magnetic fixing. Dimmer on the cable. White cable for the matt white finish, black cable for the other finishes.		
	Apparecchio illuminante da parete. Orientabile in tutte le direzioni. Fissaggio magnetico. Dimmer lungo il cavo. Cavo bianco per la finitura bianco opaco e cavo nero per le altre finiture.		


	MIRA MAGNETIC		
	5,6W		
	Max 500mA DC		
	2700K - 327lm / 3000K - 352lm		
	CRI >90		
	Driver not included		
	CE  IP20	Matt White - 2700K	1A3680300.27.20
		Matt White - 3000K	1A3680300.30.20
		Matt Black - 2700K	1A3680400.27.20
		Matt Black - 3000K	1A3680400.30.20
		Matt Black/Polished Gold - 2700K	1A3684900.27.20
		Matt Black/Polished Gold - 3000K	1A3684900.30.20

Compulsory accessories / Accessori obbligatori


Drivers / Alimentatori

	Driver with plug / Alimentatore con spina			Not included
	Matt White	Input 110-240V - 50/60Hz Output 350mA - 15W - IP20 Dimmer on board	1A3180300.00.06	
	Matt Black	Input 110-240V - 50/60Hz Output 350mA - 15W - IP20 Dimmer on board	1A3180400.00.06	
	Driver / Alimentatore			Not included
	220-240V(100-127V)	500mA/20W(15W)/IP20/PUSH - 1-10V	1Z0240870.500	




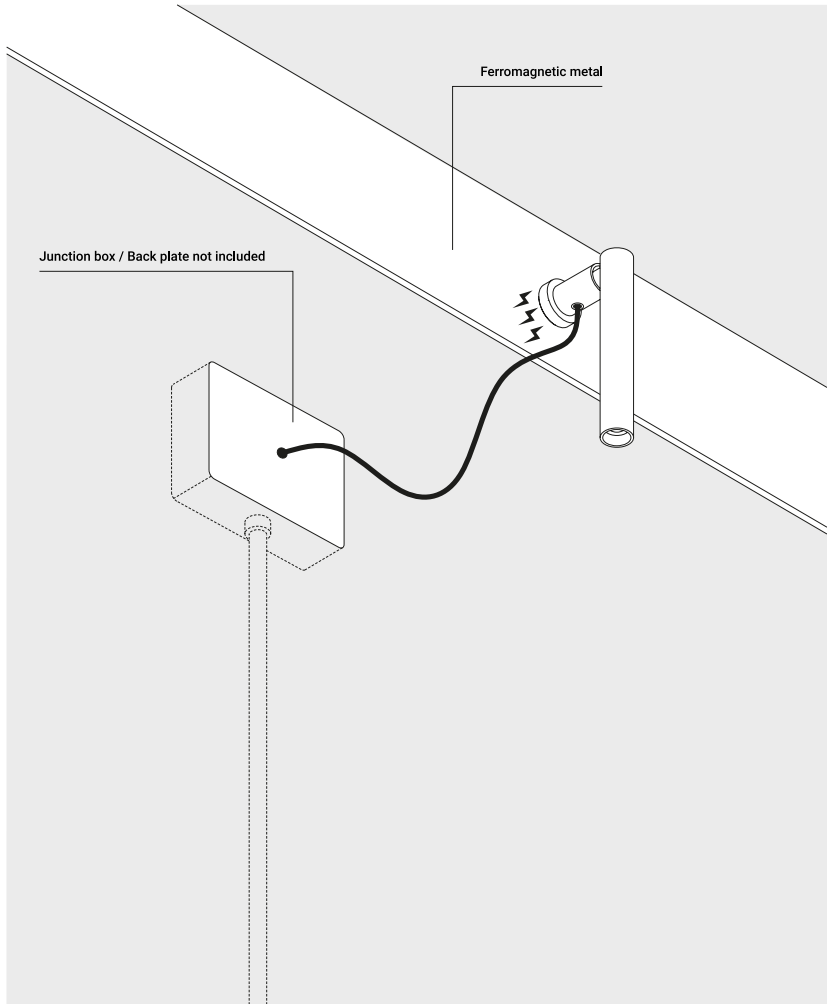

Example of installation with remote driver

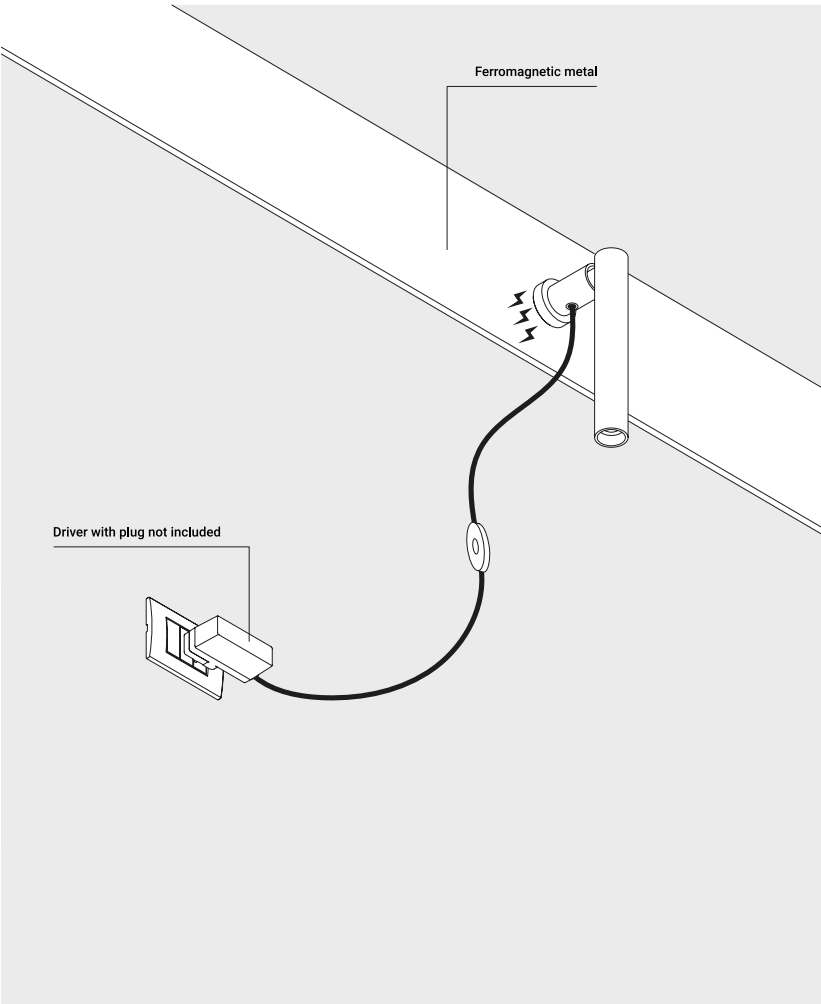


1A3180300.00.06 - 1A3180400.00.06 - Example of installation with driver with plug

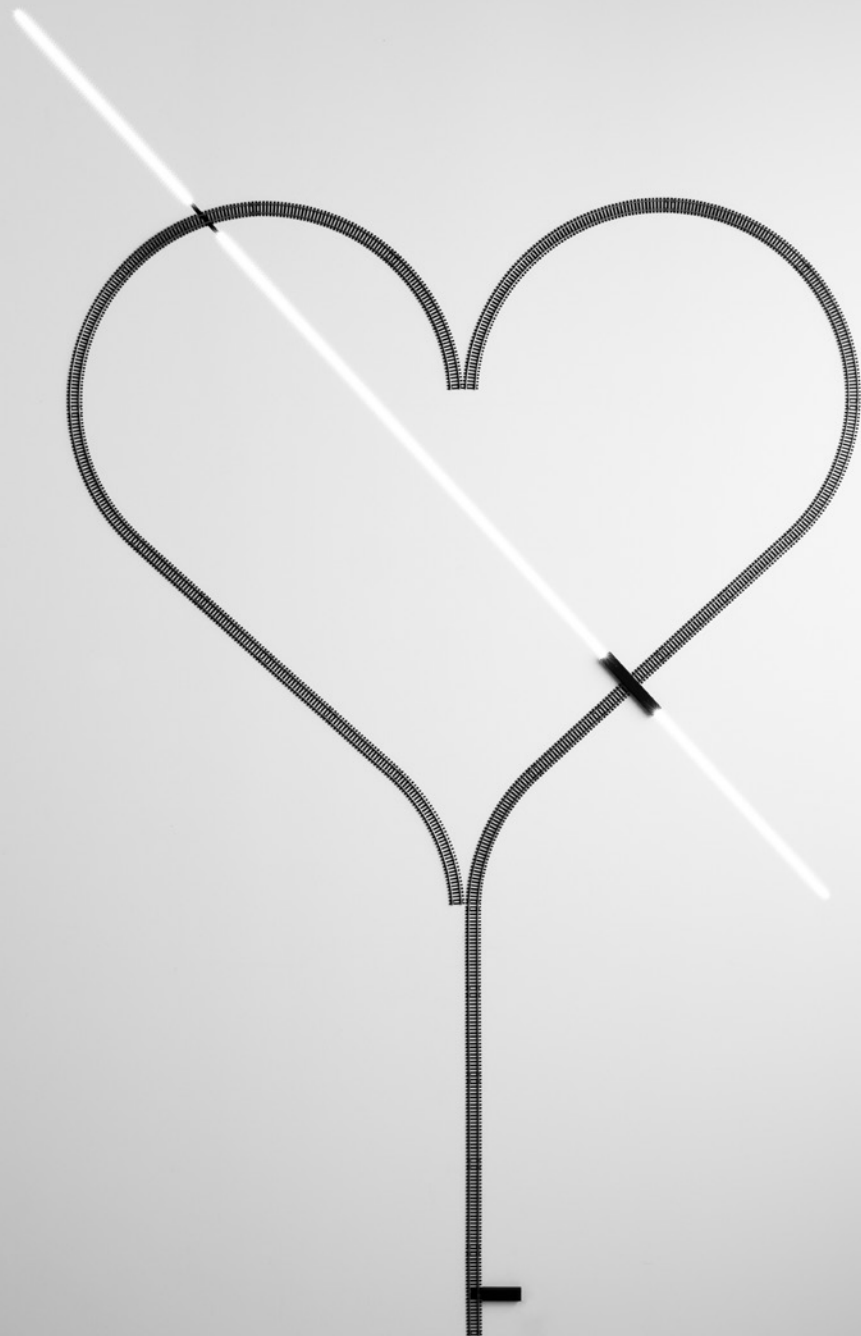

A ready-made project to design the space with a sense of irony and weightlessness.
The tracks of an electric train can be used to draw a heart, but also to conduct electricity.
Rail is the boundary between usefulness and show, between art and design.

Un ready-made per firmare lo spazio con ironia e leggerezza.
I binari di un trenino elettrico sono lo strumento per disegnare un cuore,
ma anche per condurre la corrente elettrica.
Rail è sul confine tra utilità e rappresentazione, design e arte.


Wall / Direct / Indoor	
Material	ABS - Metal
Finish	.00 Standard
Note	Wall luminaire. Matt black modular tracks. Dimmer on the cable. <i>Apparecchio illuminante da parete. Binari componibili nero opaco. Dimmer lungo il cavo. Cavo nero.</i>



RAIL
22W
24V DC
3000K - 2000lm
CRI >90
Driver included
Dimmer on board
CE IP20

Standard - 3000K - Dimmer on board

1A3400000.30.06

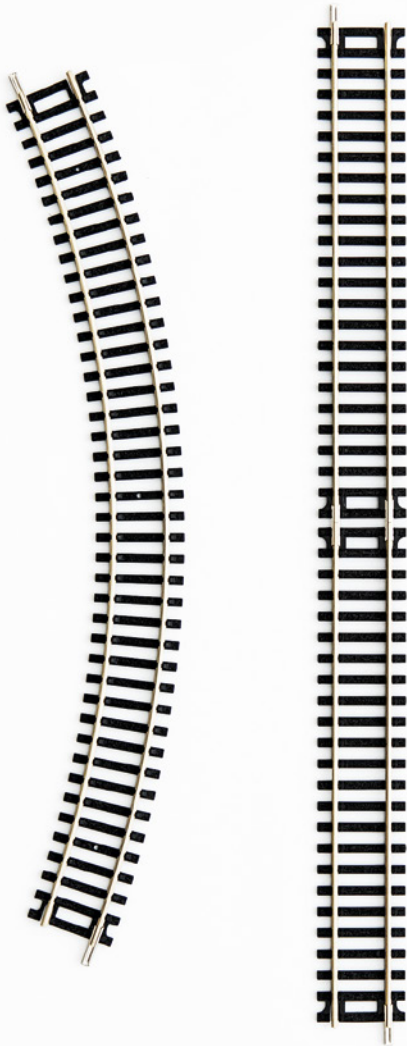



REFLEX

Michele Groppi / 2022

A powerful LED and a subtle mirror.

A magic and almost invisible lighting solution,
which provides an indirect light that multiplies spaces
and gives the eye unprecedented perspectives, unexpected depths, illusions of light.

Suspension version also available.

Luminaire designed also to be powered by ENDLESS system.


Un LED potente, uno specchio sottile.

Un apparecchio magico e quasi invisibile per una luce che moltiplica gli spazi
e regala allo sguardo prospettive inedite, profondità imprevedute, illusioni di luce.

Disponibile anche nella versione a sospensione.


Apparecchio illuminante alimentabile anche con il sistema ENDLESS.

Wall / Indirect / Indoor		
Material	Metal - Mirror	
Finish	.04 Matt Black	
Note	Wall luminaire. Plane with mirror finish. Matt black rear plane. Possibility for the luminaire to be powered by ENDLESS system (Max 48V DC - Max 150W - Max 4A) and to be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.	


	REFLEX	
	40W - 1,04A 48V DC 2700K - 3676lm / 3000K - 3761lm CRI >90 Driver not included CE  IP20 	
Matt Black - 2700K		1A5500400.27.20
Matt Black - 3000K		1A5500400.30.20

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver / Alimentatore		Not included
100-240V	48V/60W/IP67/ON/OFF	1Z1120640



Driver / Alimentatore		Not included
220-240V	48V/60W/IP20/DALI	1Z0830820





Reflections of light.

The pure and essential form of a thin mirror wich provides indirect light.

Riflessioni di luce.

La forma pura ed essenziale di uno specchio sottile a luce indiretta.

SHADE

Federico Delrosso / 2013

Wall / Indirect / Indoor

Material

Metal - Mirror


Finish

.00 Standard

Note

Wall luminaire. Plane with mirror finish. Dual emission.

Apparecchio illuminante da parete. Piano con finitura a specchio. Doppia emissione.




SHADE
23W
220-240V - 50/60Hz
2700K - 1293lm / 3000K - 1352lm
CRI >90
TRIAC/IGBT
CE IP20

Standard - 2700K - TRIAC/IGBT
Standard - 3000K - TRIAC/IGBT

1A3360000.27.02
1A3360000.30.02



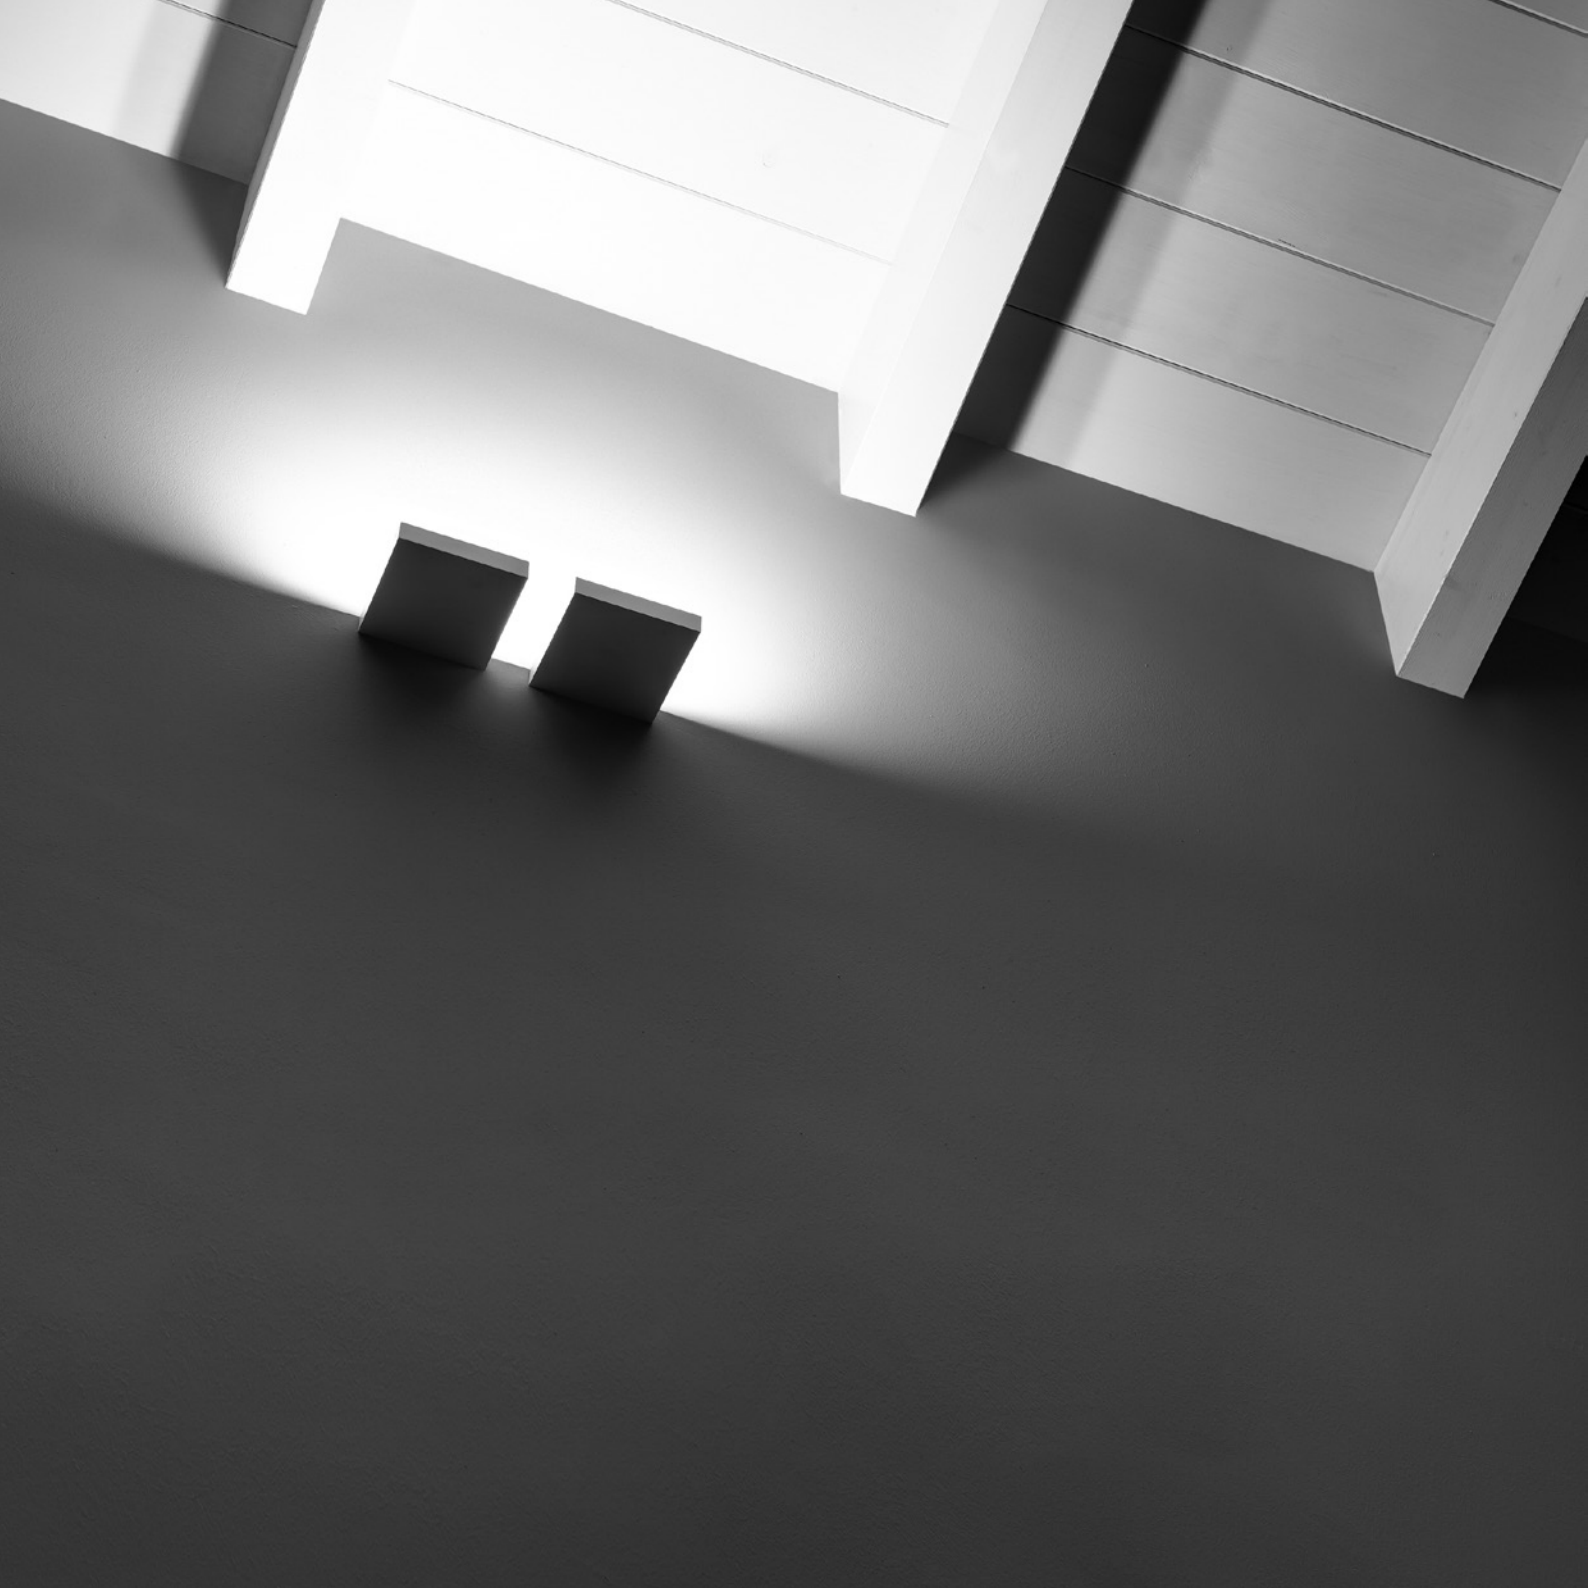

SOL 1

Omar Carraglia - Davide Groppi / 2003


A tool to light.

The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.

Elemento di luce.

Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.
La luce si integra con lo spazio diventando elemento architettonico.

Wall / Indirect / Indoor			
Material	Metal		
Finish	.03 Matt White	.04	Matt Black
Note	Wall luminaire.		Apparecchio illuminante da parete.

	SOL 1		
	12,5W		
	220-230V - 50/60Hz		
	2700K - 836lm / 3000K - 899lm		
	CRI >90		
	TRIAC/IGBT		
	CE IP20		
		Matt White - 2700K - TRIAC/IGBT	1A3130300.27.02
		Matt White - 3000K - TRIAC/IGBT	1A3130300.30.02
		Matt Black - 2700K - TRIAC/IGBT	1A3130400.27.02
		Matt Black - 3000K - TRIAC/IGBT	1A3130400.30.02





SOL 2

/ 2008


A tool to light.

The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.

Elemento di luce.

Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.
La luce si integra con lo spazio diventando elemento architettonico.

Wall / Indirect / Indoor		
Material	Metal	
Finish	.03 Matt White	.04 Matt Black
Note	Wall luminaire.	Apparecchio illuminante da parete.



SOL 2
24,5W
220-230V - 50/60Hz
2700K - 1681lm / 3000K - 1808lm
CRI >90
TRIAC/IGBT
CE IP20

Matt White - 2700K - TRIAC/IGBT	1A3140300.27.02
Matt White - 3000K - TRIAC/IGBT	1A3140300.30.02
Matt Black - 2700K - TRIAC/IGBT	1A3140400.27.02
Matt Black - 3000K - TRIAC/IGBT	1A3140400.30.02






A luminaire designed for use with state-of-the-art LED modules
to offer superior performance and a wide range of light beams.
Luminaire available also in ENDLESS version.

Un apparecchio illuminante progettato per utilizzare moduli a LED in grado di fornire
prestazioni superiori ed un'ampia gamma di fasci luminosi.
Apparecchio illuminante disponibile anche nella versione ENDLESS.


Wall-Ceiling / Direct / Indoor

Material	Metal		
Finish	.03 Matt White	.04 Matt Black	.49 Matt Black/Polished Gold
Note	Wall luminaire. Adjustable in all directions. SPOT: matt black wall fitting for all the finishes. SPOT ENDLESS and SPOT ENDLESS CASAMBI: luminaires dedicated to ENDLESS system (Max 48V DC - Max 150W - Max 4A). They can be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.		
	<i>Apparecchio illuminante da parete. Orientabile in tutte le direzioni. SPOT: attacco a muro nero opaco per tutte le finiture. SPOT ENDLESS e SPOT ENDLESS CASAMBI: apparecchi illuminanti dedicati al sistema ENDLESS (Max 48V DC - Max 150W - Max 4A) ed utilizzabili, sullo stesso circuito, con i modelli ENDLESS. Vedi pagina ENDLESS.</i>		




SPOT
Max 21W
220-240V - 50/60Hz
Driver integrated
DALI
LED module not included
CE IP20

Matt White - DALI	1A1080300.00.01
Matt Black - DALI	1A1080400.00.01
Matt Black/Polished Gold - DALI	1A1084900.00.01




SPOT
Max 21W
220-240V - 50/60Hz
Driver integrated
PUSH
LED module not included
CE IP20

Matt White - PUSH	1A1080300.00.04
Matt Black - PUSH	1A1080400.00.04
Matt Black/Polished Gold - PUSH	1A1084900.00.04



SPOT ENDLESS
ENDLESS version only
Max 13W - Max 0,34A
48V DC
Driver not included
See page ENDLESS
LED module not included
CE IP20 TE

Matt White	1A1080300.00.40
Matt Black	1A1080400.00.40
Matt Black/Polished Gold	1A1084900.00.40



SPOT ENDLESS CASAMBI
ENDLESS version only
Max 15,5W - Max 0,4A
48V DC
Driver not included
See page ENDLESS
LED module not included
CE IP20 TE A

Matt White	1A1080300.00.41
Matt Black	1A1080400.00.41
Matt Black/Polished Gold	1A1084900.00.41

Compulsory accessories / Accessori obbligatori

LED modules / Moduli LED



DG111 LED module / Modulo LED DG111		Not included	
16,7W - 15° - 500mA DC	SPOT	1A4700000.27.20	
2700K - 1648lm - CRI >90			
Energy Efficiency F - Dimmable			
16,7W - 15° - 500mA DC		1A4700000.30.20	
3000K - 1682lm - CRI >90			
Energy Efficiency F - Dimmable			



DG111 LED module / Modulo LED DG111		Not included	
16,7W - 22° - 500mA DC	SPOT	1A3890000.27.20	
2700K - 1859lm - CRI >90			
Energy Efficiency F - Dimmable			
16,7W - 22° - 500mA DC		1A3890000.30.20	
3000K - 1943lm - CRI >90			
Energy Efficiency F - Dimmable			



DG111 LED module / Modulo LED DG111		Not included	
16,7W - 36° - 500mA DC	SPOT	1A3900000.27.20	
2700K - 1795lm - CRI >90			
Energy Efficiency F - Dimmable			
16,7W - 36° - 500mA DC		1A3900000.30.20	
3000K - 1890lm - CRI >90			
Energy Efficiency F - Dimmable			



DG111 LED module / Modulo LED DG111		Not included	
11,7W - 15° - 350mA DC	SPOT ENDLESS /	1A4700000.27.20	
2700K - 1336lm - CRI >90	SPOT ENDLESS CASAMBI		
Energy Efficiency F - Dimmable			
11,7W - 15° - 350mA DC		1A4700000.30.20	
3000K - 1364lm - CRI >90			
Energy Efficiency F - Dimmable			



DG111 LED module / Modulo LED DG111		Not included	
11,7W - 22° - 350mA DC	SPOT ENDLESS /	1A3890000.27.20	
2700K - 1322lm - CRI >90	SPOT ENDLESS CASAMBI		
Energy Efficiency F - Dimmable			
11,7W - 22° - 350mA DC		1A3890000.30.20	
3000K - 1382lm - CRI >90			
Energy Efficiency F - Dimmable			



DG111 LED module / Modulo LED DG111		Not included	
11,7W - 36° - 350mA DC	SPOT ENDLESS /	1A3900000.27.20	
2700K - 1276lm - CRI >90	SPOT ENDLESS CASAMBI		
Energy Efficiency F - Dimmable			
11,7W - 36° - 350mA DC		1A3900000.30.20	
3000K - 1343lm - CRI >90			
Energy Efficiency F - Dimmable			

Optional accessories / Accessori opzionali

Other accessories / Altri accessori



Accessory holder + Soft filter + Honeycomb louvre / Porta accessori + Filtro soft + Frangiluce nido d'ape		Not included	
Matt Black		1X0070400.04.00	



Accessory holder + Elliptical filter / Porta accessori + Filtro ellittico		Not included	
Matt Black		1X0070400.05.00	




Blue filter / Filtro blu		Not included	
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.06.00	



Red filter / Filtro rosso		Not included	
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.07.00	



Yellow filter / Filtro giallo		Not included	
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.08.00	



Directional fins / Alette direzionali		Not included	
Matt Black		1X0070400.01.00	



Cylindrical screen / Schermo cilindrico		Not included	
Matt Black		1X0070400.02.00	



Cone 30° / Cono 30°		Not included	
Matt Black		1X0070400.03.00	



TOAST

Davide Groppi - Alberto Zattin / 2001

The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.

Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.
La luce si integra con lo spazio diventando elemento architettonico.

TOAST

Davide Groppi - Alberto Zattin / 2001

Wall / Diffuse / Indoor				
Material	Glass - Metal			
Finish	.01	Polished Chrome	.03	Matt White
	.14	Brushed Chrome	.04	Matt Black
			.08	Brushed Brass
Note	Wall luminaire. Dual emission.			
	Apparecchio illuminante da parete. Doppia emissione.			

	TOAST Max 100W - R7s 100-240V - 50/60Hz ON/OFF Bulb not included C E IP20 0,5 m	Polished Chrome - ON/OFF Matt White - ON/OFF Matt Black - ON/OFF Brushed Brass - ON/OFF Brushed Chrome - ON/OFF	1A3290100.00.00 1A3290300.00.00 1A3290400.00.00 1A3290800.00.00 1A3291400.00.00
	TOAST LED 12W 100-240V - 50/60Hz 2700K - 743lm / 3000K - 743lm CRI >90 Driver integrated ON/OFF C E IP20	Polished Chrome - 2700K - ON/OFF Polished Chrome - 3000K - ON/OFF Matt White - 2700K - ON/OFF Matt White - 3000K - ON/OFF Matt Black - 2700K - ON/OFF Matt Black - 3000K - ON/OFF Brushed Brass - 2700K - ON/OFF Brushed Brass - 3000K - ON/OFF Brushed Chrome - 2700K - ON/OFF Brushed Chrome - 3000K - ON/OFF	1A3280100.27.00 1A3280100.30.00 1A3280300.27.00 1A3280300.30.00 1A3280400.27.00 1A3280400.30.00 1A3280800.27.00 1A3280800.30.00 1A3281400.27.00 1A3281400.30.00

Optional accessories / Accessori opzionali

Bulbs / Lampadine			
	LED - R7s COB - 78 mm	Not included	
	220-240V - 4W - 330° 3000K - 450lm - CRI >80 Energy Efficiency E	1Y0000138	



Private Residence
Montecarlo






VICEVERSA

Davide Groppi / 2024

A simple and elegant wall lamp.
The light is projected both upwards and downwards,
offering incredible lightness to the design.

Una lampada da parete, semplice ed elegante.
La luce viene diffusa sia verso l'alto che verso il basso
e regala al progetto grande leggerezza.


Wall / Diffuse / Indoor			
Material	Metal		
Finish	.03 Matt White	.39 Matt White/Polished Gold	.49 Matt Black/Polished Gold
Note	Wall-mounted luminaire. Dual emission. Matt black wall fitting for matt white/polished gold and matt black/polished gold finishes.		
	Apparecchio illuminante da parete. Doppia emissione. Attacco a muro nero opaco per le finiture bianco opaco/oro lucido e nero opaco/oro lucido.		



VICEVERSA
28W
110-240V - 50/60Hz
2700K - Up 3000lm - Down 140lm /
3000K - Up 3200lm - Down 144lm
CRI >90
Driver integrated
DALI
C E IP20

Matt White - 2700K - DALI
Matt White - 3000K - DALI
Matt White/Polished Gold - 2700K - DALI
Matt White/Polished Gold - 3000K - DALI
Matt Black/Polished Gold - 2700K - DALI
Matt Black/Polished Gold - 3000K - DALI


1A5310300.27.01
1A5310300.30.01
1A5313900.27.01
1A5313900.30.01
1A5314900.27.01
1A5314900.30.01



VICEVERSA
28W
110-240V - 50/60Hz
2700K - Up 3000lm - Down 140lm /
3000K - Up 3200lm - Down 144lm
CRI >90
Driver integrated
PUSH
C E IP20

Matt White - 2700K - PUSH
Matt White - 3000K - PUSH
Matt White/Polished Gold - 2700K - PUSH
Matt White/Polished Gold - 3000K - PUSH
Matt Black/Polished Gold - 2700K - PUSH
Matt Black/Polished Gold - 3000K - PUSH


1A5310300.27.04
1A5310300.30.04
1A5313900.27.04
1A5313900.30.04
1A5314900.27.04
1A5314900.30.04



VICEVERSA
28W
110-240V - 50/60Hz
2700K - Up 3000lm - Down 140lm /
3000K - Up 3200lm - Down 144lm
CRI >90
Driver integrated
1-10V
C E IP20

Matt White - 2700K - 1-10V
Matt White - 3000K - 1-10V
Matt White/Polished Gold - 2700K - 1-10V
Matt White/Polished Gold - 3000K - 1-10V
Matt Black/Polished Gold - 2700K - 1-10V
Matt Black/Polished Gold - 3000K - 1-10V

1A5310300.27.03
1A5310300.30.03
1A5313900.27.03
1A5313900.30.03
1A5314900.27.03
1A5314900.30.03



VICEVERSA
28W
110-240V - 50/60Hz
2700K - Up 3000lm - Down 140lm /
3000K - Up 3200lm - Down 144lm
CRI >90
Driver integrated
TRIAC/IGBT
C E IP20

Matt White - 2700K - TRIAC/IGBT
Matt White - 3000K - TRIAC/IGBT
Matt White/Polished Gold - 2700K - TRIAC/IGBT
Matt White/Polished Gold - 3000K - TRIAC/IGBT
Matt Black/Polished Gold - 2700K - TRIAC/IGBT
Matt Black/Polished Gold - 3000K - TRIAC/IGBT

1A5310300.27.02
1A5310300.30.02
1A5313900.27.02
1A5313900.30.02
1A5314900.27.02
1A5314900.30.02



CEILING / SOFFITTO




Abstraction, purity, graphic sign.
The projected reduction of Infinito.
The disc appears enigmatic, the symbolic presence of the absence of light.

Astrazione, purezza, segno grafico.
La riduzione puntuale di Infinito.
Il disco appare enigmatico, presenza simbolica dell'assenza della luce.

Ceiling / Indirect / Indoor

Material	Metal - Methacrylate
Finish	.27 Gravity Black

Note	Ceiling luminaire. Disc with Gravity Black finish. Magnetic weight available for disc tilting. Black cable.	<i>Apparecchio illuminante da soffitto. Disco con finitura Gravity Black. Disponibile un peso magnetico per l'orientamento inclinato del disco. Cavo</i>
-------------	---	--



ASINTOTO

18W

Max 500mA DC

2700K - 1435lm / 3000K - 1481lm

CRI >90

Driver not included



Gravity Black - 2700K


Gravity Black - 3000K

1A4072700.27.20


1A4072700.30.20

Compulsory accessories / Accessori obbligatori


Drivers / Alimentatori



Driver / Alimentatore	Not included
220-240V(100-127V) 500mA/20W(15W)/IP20/DALI	1Z0241180.500




Driver / Alimentatore	Not included
220-240V(100-127V) 500mA/20W(15W)/IP20/PUSH - 1-10V	1Z0240870.500



Driver / Alimentatore	Not included
220-240V 500mA/20W/IP20/TRIAC/IGBT	1Z0240850.500

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



Circular plasterboard panel 12,5 mm / Botola circolare per cartongesso 12,5 mm		Not included
Standard	Cut-out 400x400 mm	1A4520000.00.00
	Minimum space for mounting 115 mm	



Remote clamp for electrical cable / Bloccacavo remoto per cavo elettrico	Not included
Standard	1X0110000.01.00


Suspension kits / Kit di sospensione



Recessed suspension kit for 12,5 mm plasterboard / Kit di sospensione da incasso per cartongesso 12,5 mm		Not included
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000300.04.00
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000400.04.00



Ceiling suspension kit / Kit di sospensione da soffitto			Not included
Matt White	For electrical cables - 1 Piece	1X0010300.04.00	
Matt Black	For electrical cables - 1 Piece	1X0010400.04.00	





Wall adapter plate / Piastra di adattamento da parete		Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00

Other accessories / Altri accessori



Magnetic weight / Peso magnetico		Not included
Matt Black	For sloped installation	1A4710400.00.00



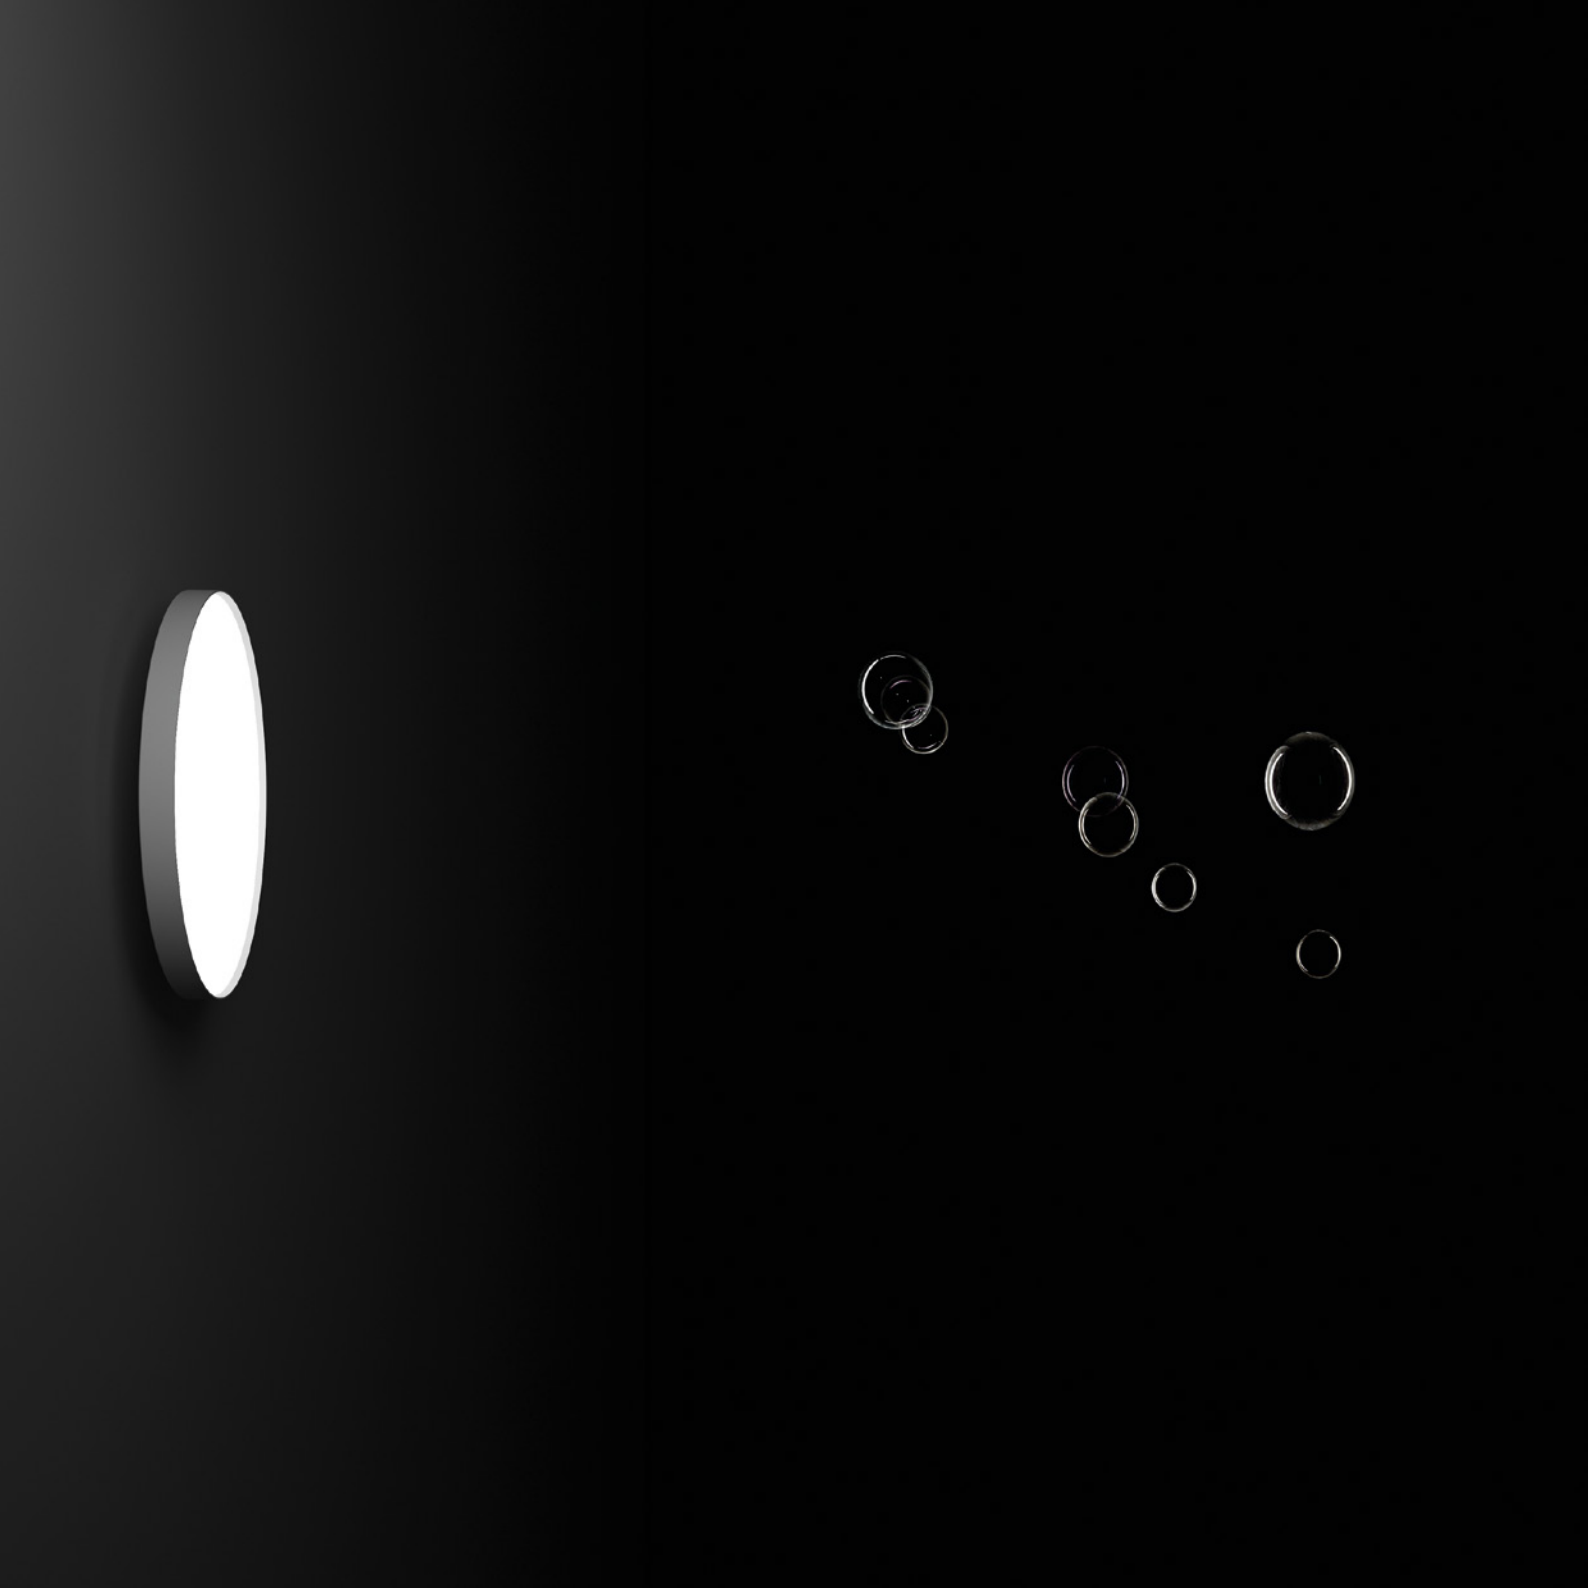


A white disc, the perfect representation of diffused light.
It can be mounted on the wall or ceiling, with modular brightness.

Un disco bianco, rappresentazione perfetta della luce diffusa.
È applicabile a soffitto o a parete ed è modulabile in tutte le intensità.

AURORA

Davide Groppi / 2023

Ceiling-Wall / Diffuse / Indoor				
Material	Metal - PMMA			
Finish	.03 Matt White	.04 Matt Black	.32 Copper Oxide	
Note	Wall and ceiling luminaire. Matt white diffuser.		Apparecchio illuminante da parete e soffitto. Diffusore bianco opaco.	



AURORA

28W
110-240V - 50/60Hz
3000K - 2700lm
CRI >80
Driver integrated
DALI - PUSH - 1-10V
CE IP20

Matt White - 3000K - DALI - PUSH - 1-10V	1A4010300.30.07
Matt Black - 3000K - DALI - PUSH - 1-10V	1A4010400.30.07
Copper Oxide - 3000K - DALI - PUSH - 1-10V	1A4013200.30.07

Spazio Davide Groppi
Madrid

DOT PL 51

Omar Carraglia - Davide Groppi / 2015




A tool to light.




A luminaire designed for use with state-of-the-art LED bulbs
to offer superior performance and a wide range of light beams.

Elemento di luce.

Un apparecchio illuminante progettato per utilizzare lampadine a LED
in grado di fornire prestazioni superiori ed un'ampia gamma di fasci luminosi.

Ceiling / Direct / Indoor		
Material	Metal	
Finish	.03 Matt White	
Note	Ceiling luminaire.	Apparecchio illuminante da soffitto.

	DOT PL 51 Max 10W - GU10 100-240V - 50/60Hz ON/OFF Bulb not included CE IP20	Matt White - ON/OFF	1A3800300.00.00
---	--	---------------------	-----------------

Optional accessories / Accessori opzionali		
Bulbs / Lampadine		
	LED - GU10 - PAR16	Not included
	220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	1Y0330500
	LED SORAA - GU10 - MR16	Not included
	230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580210
	LED SORAA - GU10 - MR16	Not included
	230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580010
Other accessories / Altri accessori		
	Darklight	Not included
	LED SORAA - GU10 - MR16	1Y1580040
	25° beam filter / Filtro fascio 25°	Not included
	LED SORAA - GU10 - MR16	1Y1580020
	36° beam filter / Filtro fascio 36°	Not included
	LED SORAA - GU10 - MR16	1Y1580030



HAKO PL

Alberto Zattin / 2000



A tool to light.

The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.

Elemento di luce.

Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.
La luce si integra con lo spazio diventando elemento architettonico.

HAKO PL

Alberto Zattin / 2000

Ceiling / Diffuse / Indoor

Material

Metal - Methacrylate


Finish

.03 Matt White

Note

Ceiling luminaire. Sanded glass diffuser.

Apparecchio illuminante da soffitto. Diffusore in vetro sabbiato.



HAKO PL
12,5W
220-230V - 50/60Hz
2700K - 593lm / 3000K - 638lm
CRI >90
TRIAC/IGBT
CE IP20

Matt White - 2700K - TRIAC/IGBT	1A3160300.27.02
Matt White - 3000K - TRIAC/IGBT	1A3160300.30.02






The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.

Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.
La luce si integra con lo spazio diventando elemento architettonico.

Ceiling / Direct / Indoor		
Material	Metal	
Finish	.03 Matt White .34 Matt White/Black Bicolor	
Note	Ceiling luminaire. Adjustable in all directions. <i>Apparecchio illuminante da soffitto. Orientabile in tutte le direzioni.</i>	

	MINI PL 51	
	Max 10W - GU10	
	100-240V - 50/60Hz	
	ON/OFF	
Bulb not included		
CE IP20		
Matt White - ON/OFF		1A3450300.00.00
Matt White/Black Bicolor - ON/OFF		1A3453400.00.00

Optional accessories / Accessori opzionali		
Bulbs / Lampadine		
	LED - GU10 - PAR16	Not included
	220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	1Y0330500
	LED SORAA - GU10 - MR16	Not included
	230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580210
	LED SORAA - GU10 - MR16	Not included
	230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580010
Other accessories / Altri accessori		
	Darklight	Not included
	LED SORAA - GU10 - MR16	1Y1580040
	25° beam filter / Filtro fascio 25°	Not included
	LED SORAA - GU10 - MR16	1Y1580020
	36° beam filter / Filtro fascio 36°	Not included
	LED SORAA - GU10 - MR16	1Y1580030



NULLA PL

Davide Groppi / 2014

The marvellous Nulla project, also available in a surface mounted version.

Il meraviglioso progetto Nulla utilizzabile anche in versione non incassata.

NULLA PL

Ceiling / Direct / Indoor

Material

Metal


Finish

.03 Matt White

Note

Ceiling luminaire. Visible 18 mm diameter hole.

Davide Groppi / 2014



NULLA PL
8,5W
100-240V - 50/60Hz
2700K - 460lm / 3000K - 495lm
CRI >90
Driver integrated
ON/OFF
CE IP20

Matt White - 2700K - ON/OFF	1A2500300.27.00
Matt White - 3000K - ON/OFF	1A2500300.30.00





A tool to light.

The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.

Elemento di luce.

Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.
La luce si integra con lo spazio diventando elemento architettonico.

Ceiling / Direct / Indoor		
Material	Metal	
Finish	.03 Matt White .34 Matt White/Black Bicolor	
Note	Ceiling luminaire. Adjustable in all directions. <i>Apparecchio illuminante da soffitto. Orientabile in tutte le direzioni.</i>	

	PUNTO PL	
	Max 21W 100-240V - 50/60Hz Driver integrated PUSH LED module not included CE IP20	Matt White - PUSH Matt White/Black Bicolor - PUSH 1A1110300.00.04 1A1113400.00.04

Compulsory accessories / Accessori obbligatori

LED modules / Moduli LED		
	DG111 LED module / Modulo LED DG111	Not included
	16,7W - 15° - 500mA DC 2700K - 1648lm - CRI >90 Energy Efficiency F - Dimmable	1A4700000.27.20
	16,7W - 15° - 500mA DC 3000K - 1682lm - CRI >90 Energy Efficiency F - Dimmable	1A4700000.30.20
	DG111 LED module / Modulo LED DG111	Not included
	16,7W - 22° - 500mA DC 2700K - 1859lm - CRI >90 Energy Efficiency F - Dimmable	1A3890000.27.20
	16,7W - 22° - 500mA DC 3000K - 1943lm - CRI >90 Energy Efficiency F - Dimmable	1A3890000.30.20
	DG111 LED module / Modulo LED DG111	Not included
	16,7W - 36° - 500mA DC 2700K - 1795lm - CRI >90 Energy Efficiency F - Dimmable	1A3900000.27.20
	16,7W - 36° - 500mA DC 3000K - 1890lm - CRI >90 Energy Efficiency F - Dimmable	1A3900000.30.20

Optional accessories / Accessori opzionali

Other accessories / Altri accessori		
	Accessory holder + Soft filter + Honeycomb louvre / Porta accessori + Filtro soft + Frangiluce nido d'ape	Not included
	Matt Black	1X0070400.04.00
	Accessory holder + Elliptical filter / Porta accessori + Filtro ellittico	Not included
	Matt Black	1X0070400.05.00
	Blue filter / Filtro blu	Not included
	Standard Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.06.00
	Red filter / Filtro rosso	Not included
	Standard Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.07.00
	Yellow filter / Filtro giallo	Not included
	Standard Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.08.00




A tool to light.

The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.

Elemento di luce.

Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.
La luce si integra con lo spazio diventando elemento architettonico.

Ceiling / Direct / Indoor		
Material	Metal	
Finish	.03 Matt White .34 Matt White/Black Bicolor	
Note	Ceiling luminaire. Adjustable in all directions. <i>Apparecchio illuminante da soffitto. Orientabile in tutte le direzioni.</i>	




PUNTO 2 PL
Max 2x21W
100-240V - 50/60Hz
Driver integrated
PUSH
LED modules not included
CE IP20


Matt White - PUSH	1A1120300.00.04
Matt White/Black Bicolor - PUSH	1A1123400.00.04

Compulsory accessories / Accessori obbligatori


LED modules / Moduli LED



DG111 LED module / Modulo LED DG111		Not included
16,7W - 15° - 500mA DC 2700K - 1648lm - CRI >90 Energy Efficiency F - Dimmable	1A4700000.27.20	
16,7W - 15° - 500mA DC 3000K - 1682lm - CRI >90 Energy Efficiency F - Dimmable	1A4700000.30.20	




DG111 LED module / Modulo LED DG111		Not included
16,7W - 22° - 500mA DC 2700K - 1859lm - CRI >90 Energy Efficiency F - Dimmable	1A3890000.27.20	
16,7W - 22° - 500mA DC 3000K - 1943lm - CRI >90 Energy Efficiency F - Dimmable	1A3890000.30.20	




DG111 LED module / Modulo LED DG111		Not included
16,7W - 36° - 500mA DC 2700K - 1795lm - CRI >90 Energy Efficiency F - Dimmable	1A3900000.27.20	
16,7W - 36° - 500mA DC 3000K - 1890lm - CRI >90 Energy Efficiency F - Dimmable	1A3900000.30.20	

Optional accessories / Accessori opzionali


Other accessories / Altri accessori



Accessory holder + Soft filter + Honeycomb louvre / Porta accessori + Filtro soft + Frangiluce nido d'ape		Not included
Matt Black	1X0070400.04.00	




Accessory holder + Elliptical filter / Porta accessori + Filtro ellittico		Not included
Matt Black	1X0070400.05.00	



Blue filter / Filtro blu		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.06.00



Red filter / Filtro rosso		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.07.00



Yellow filter / Filtro giallo		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.08.00



SANMARTINO

Omar Carraglia - Davide Groppi / 2014

Where did the chandelier go?

A work about absence. About something missing.

As if by removing the chandelier, its memory stays, but with a modern and sensual light.

Dov'è finito il lampadario?

Un progetto sull'assenza, su qualcosa che manca.

Come se togliendo il lampadario, rimanga la sua memoria,
ma con una luce moderna e sensuale.

SANMARTINO

Ceiling / Direct / Indoor

Material

Metal

Finish

.03

Matt White

.15

Natural Brass

Note

Ceiling luminaire. Visible 18 mm diameter hole.

Apparecchio illuminante da soffitto. Foro visibile con diametro da 18 mm.



SANMARTINO

8,5W
100-240V - 50/60Hz
3000K - 375lm
CRI >90
Driver integrated
ON/OFF
CE IP20

Matt White - 3000K - ON/OFF	1A3420300.30.00
Natural Brass - 3000K - ON/OFF	1A3421500.30.00






TRICK TRACK

/ 2016

A simple, graphic solution.
Bringing accent lighting with an external wiring system.

Una soluzione semplice e grafica.
Per portare luce d'accento con un sistema fuori traccia.

Wall-Ceiling / Direct / Indoor		
Material	Metal	
Finish	.03 Matt White	.04 Matt Black
Note	Ceiling luminaire. Adjustable in all directions. White cable (2 m) for the matt white finish. Black cable (2 m) for the matt black finish. Connects max 20 lamps.	



TRICK TRACK

Max 10W - GU10
100-240V - 50/60Hz
ON/OFF
Bulb not included



Matt White - ON/OFF
Matt Black - ON/OFF

1A3430300.00.00
1A3430400.00.00

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



Wall and ceiling rose / Rosone da parete e soffitto	Not included
Matt White	1X0030300.01.00
Matt Black	1X0030400.01.00

Bulbs / Lampadine



LED - GU10 - PAR16	Not included
220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	1Y0330500




LED SORAA - GU10 - MR16	Not included
230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580210




LED SORAA - GU10 - MR16	Not included
230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580010


Other accessories / Altri accessori



Darklight	Not included
LED SORAA - GU10 - MR16	1Y1580040



25° beam filter / Filtro fascio 25°	Not included
LED SORAA - GU10 - MR16	1Y1580020



36° beam filter / Filtro fascio 36°	Not included
LED SORAA - GU10 - MR16	1Y1580030

RECESSED / INCASSO



BU CO R

/ 2006

A tool to light.

The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.


Elemento di luce.

Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.
La luce si integra con lo spazio diventando elemento architettonico.

Recessed / Direct / Indoor		
Material	Metal	
Finish	.03 Matt White	
Note	Recessed luminaire. Adjustable in all directions. Plasterboard hole: Ø 90 mm. Minimum space for recessed installation: 100 mm.	
	Apparecchio illuminante da incasso. Orientabile in tutte le direzioni. Foro del cartongesso: Ø 90 mm. Spazio minimo per incasso: 100 mm.	

	BUCO R Max 35W - GU5,3 - 12V 12V Driver not included ON/OFF Bulb not included CE  IP20   1.0 m	Matt White - ON/OFF	1A3720300.00.00
---	--	---------------------	-----------------

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori			
	Driver / Alimentatore		Not included
	230-240V	12V/50W/IP20/TRIAC/IGBT	1Z0240440

Optional accessories / Accessori opzionali

Bulbs / Lampadine			
	LED - GU5,3 - MR16		Not included
	12V - 6,7W - 36° 3000K - 440lm - CRI >97 Energy Efficiency G - Dimmable		1Y0330530



DOT R

Omar Carraglia - Davide Groppi / 2015



A tool to light.


A luminaire designed for use with state-of-the-art LED modules to offer superior performance and a wide range of light beams.

Elemento di luce.


Un apparecchio illuminante progettato per utilizzare moduli a LED in grado di fornire prestazioni superiori ed un'ampia gamma di fasci luminosi.

Optional accessories / Accessori opzionali


Other accessories / Altri accessori




Accessory holder + Honeycomb louvre / Porta accessori + Frangiluce nido d'ape		Not included	
	DOT R	1X0080400.01.00	




Elliptical filter / Filtro ellittico		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT R	1X0080000.02.00



Blue filter / Filtro blu		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT R	1X0080000.03.00



Red filter / Filtro rosso		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT R	1X0080000.04.00



Yellow filter / Filtro giallo		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT R	1X0080000.05.00

Optional accessories / Accessori opzionali

Bulbs / Lampadine



LED - GU10 - PAR16		Not included	
	220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	DOT R 51	1Y0330500




LED SORAA - GU10 - MR16		Not included	
	230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	DOT R 51	1Y1580210




LED SORAA - GU10 - MR16		Not included	
	230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	DOT R 51	1Y1580010


Other accessories / Altri accessori



Darklight		Not included	
	LED SORAA - GU10 - MR16	DOT R 51	1Y1580040



25° beam filter / Filtro fascio 25°		Not included	
	LED SORAA - GU10 - MR16	DOT R 51	1Y1580020



36° beam filter / Filtro fascio 36°		Not included	
	LED SORAA - GU10 - MR16	DOT R 51	1Y1580030



A tool to light.

The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.

Elemento di luce.

Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.
La luce si integra con lo spazio diventando elemento architettonico.

Recessed / Direct / Indoor			
Material	Metal		
Finish	.03 Matt White	.04	Matt Black
Note	Recessed luminaire. Adjustable in all directions. Plasterboard hole: 104x104 mm. Minimum space for recessed installation: 130 mm.		



MINI 51

Max 10W - GU10
100-240V - 50/60Hz
ON/OFF
Bulb not included



Matt White - ON/OFF
Matt Black - ON/OFF

1A0660300.00.00
1A0660400.00.00

Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione



Plasterboard frame 12,5 mm / Cornice per cartongesso 12,5 mm			Not included
Matt White	Cut-out 104x104 mm Minimum space for mounting 130 mm	1A3500300.00.00	
Matt Black	Cut-out 104x104 mm Minimum space for mounting 130 mm	1A3500400.00.00	

Optional accessories / Accessori opzionali

Bulbs / Lampadine



LED - GU10 - PAR16			Not included
	220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	1Y0330500	




LED SORAA - GU10 - MR16			Not included
	230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580210	




LED SORAA - GU10 - MR16			Not included
	230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580010	


Other accessories / Altri accessori




Darklight			Not included
	LED SORAA - GU10 - MR16	1Y1580040	



25° beam filter / Filtro fascio 25°			Not included
	LED SORAA - GU10 - MR16	1Y1580020	



36° beam filter / Filtro fascio 36°			Not included
	LED SORAA - GU10 - MR16	1Y1580030	

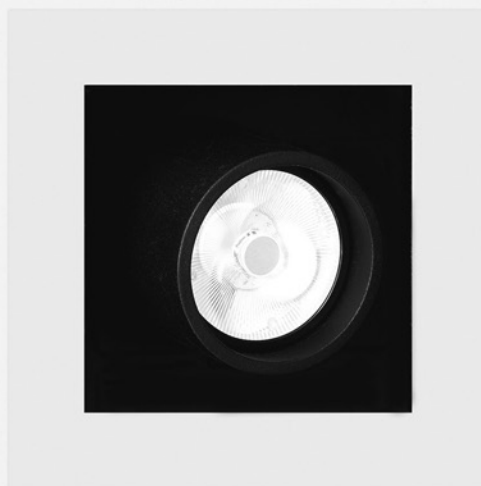

A tool to light.

The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.

Elemento di luce.

Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.
La luce si integra con lo spazio diventando elemento architettonico.

Recessed / Direct / Indoor			
Material	Metal		
Finish	.03 Matt White	.34	Matt White/Black Bicolor
Note	Recessed luminaire. Adjustable in all directions. Plasterboard hole: 104x104 mm. Minimum space for recessed installation: 130 mm.		
	<i>Apparecchio illuminante da incasso. Orientabile in tutte le direzioni. Foro del cartongesso: 104x104 mm. Spazio minimo per incasso: 130 mm.</i>		

	MINI BIT 51		
	Max 10W - GU10		
	100-240V - 50/60Hz		
	ON/OFF		
Bulb not included			
CE IP20   1.0 m			
Matt White - ON/OFF			1A0670300.00.00
Matt White/Black Bicolor - ON/OFF			1A0673400.00.00

Optional accessories / Accessori opzionali

Bulbs / Lampadine



LED - GU10 - PAR16	Not included
220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	1Y0330500




LED SORAA - GU10 - MR16	Not included
230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580210




LED SORAA - GU10 - MR16	Not included
230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580010


Other accessories / Altri accessori



Darklight	Not included
LED SORAA - GU10 - MR16	1Y1580040




25° beam filter / Filtro fascio 25°	Not included
LED SORAA - GU10 - MR16	1Y1580020



36° beam filter / Filtro fascio 36°	Not included
LED SORAA - GU10 - MR16	1Y1580030

MIRA R

Omar Carraglia / 2015

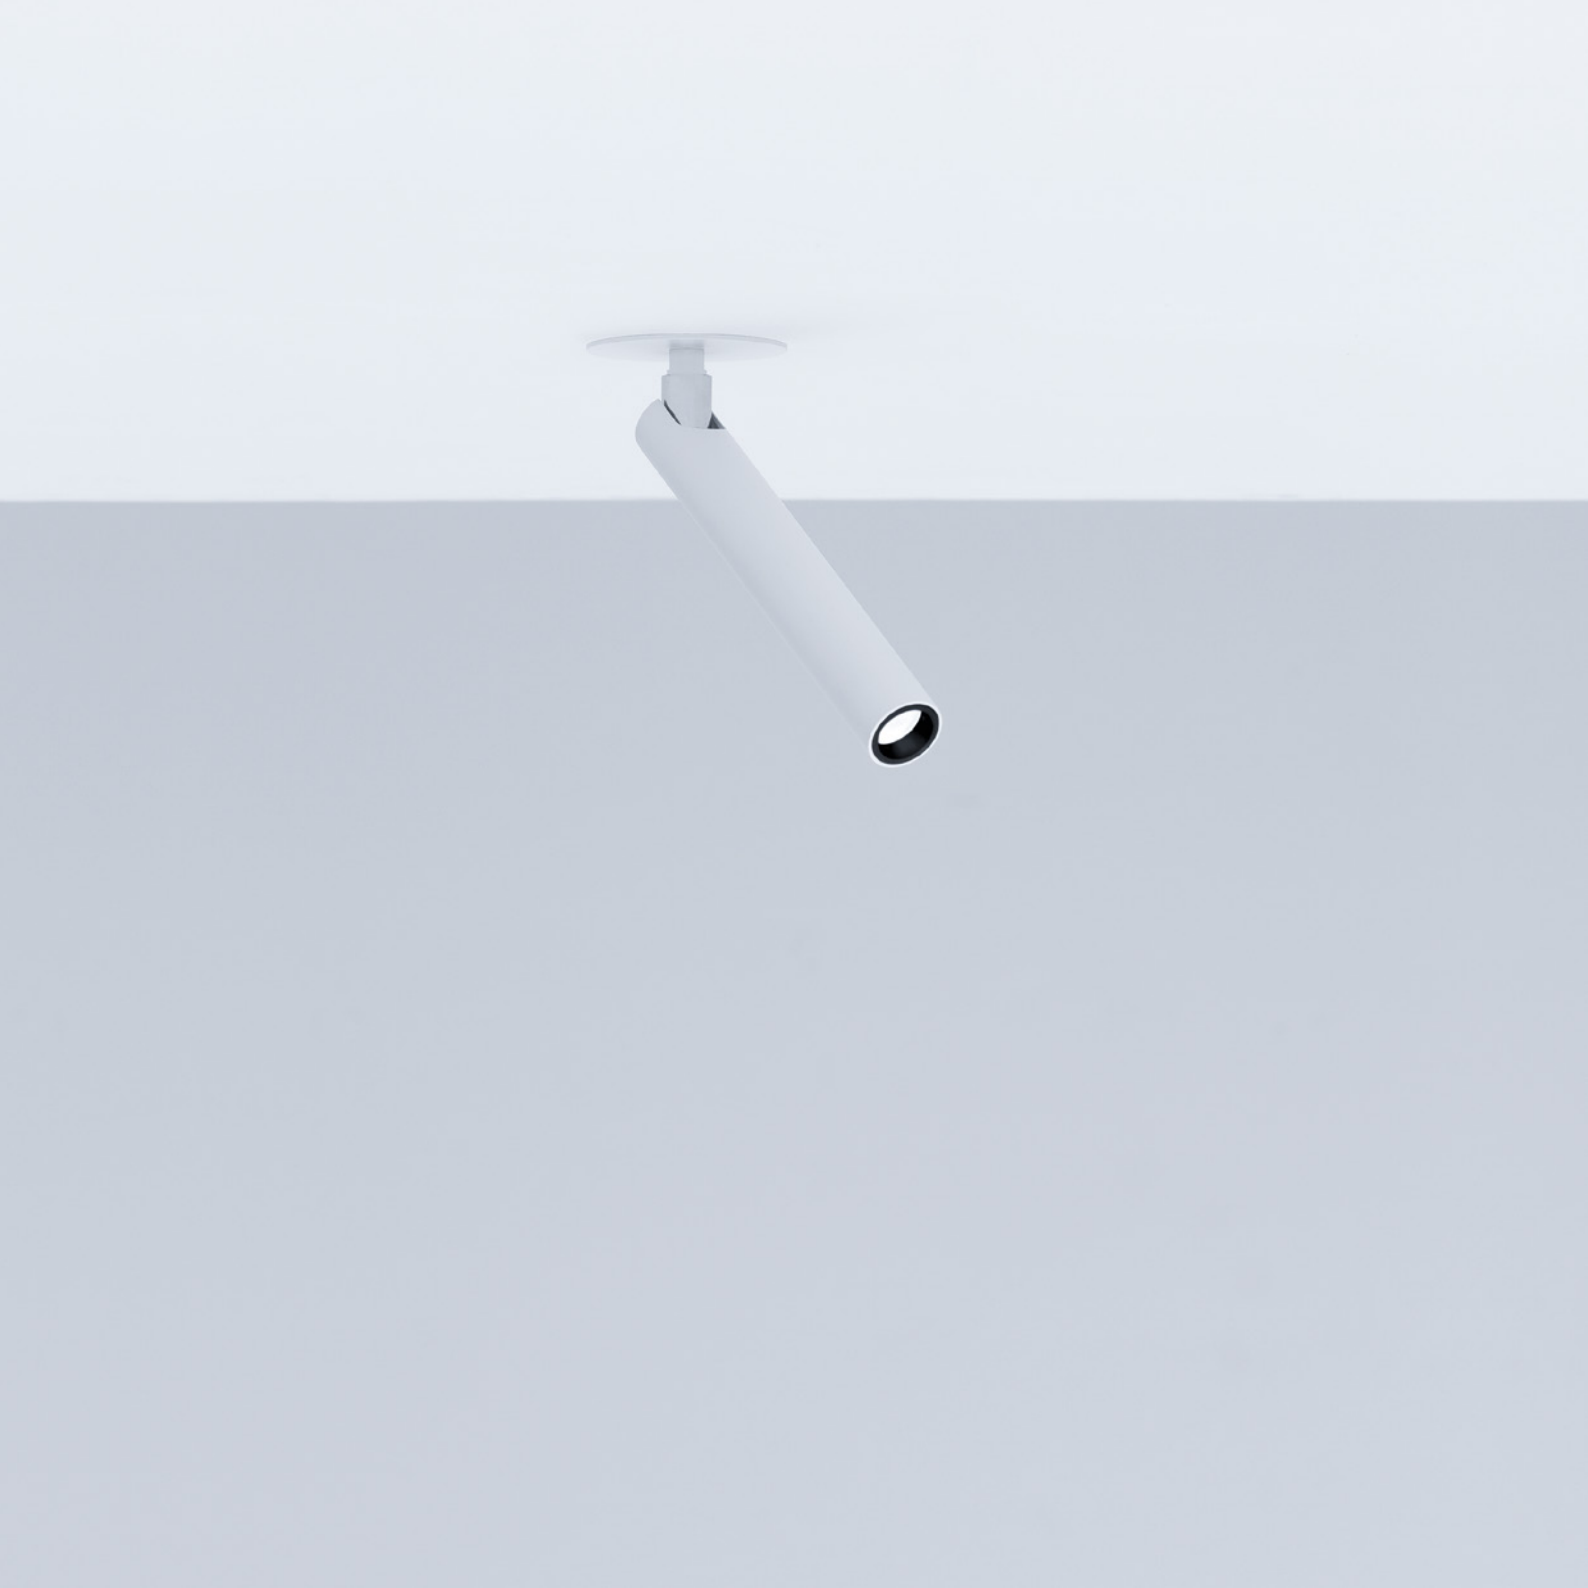

A tool to light.

The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.

Elemento di luce.

Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.
La luce si integra con lo spazio diventando elemento architettonico.

MIRA R

Omar Carraglia / 2015

Recessed / Direct / Indoor

Material

Metal

Finish

.03

Matt White

.04

Matt Black


.49

Matt Black/Polished Gold

Note

Recessed luminaire. Adjustable in all directions. Plasterboard hole: 40x40 mm. Minimum space for recessed installation: 60 mm.

Apparecchio illuminante da incasso. Orientabile in tutte le direzioni. Foro del cartongesso: 40x40 mm. Spazio minimo per incasso: 60 mm.



MIRA R

5,6W

Max 500mA DC

2700K - 327lm / 3000K - 352lm

CRI >90

Driver not included

CE IP20

Matt White - 2700K

Matt White - 3000K

Matt Black - 2700K

Matt Black - 3000K

Matt Black/Polished Gold - 2700K

Matt Black/Polished Gold - 3000K

1A3690300.27.20

1A3690300.30.20

1A3690400.27.20


1A3690400.30.20

1A3694900.27.20


1A3694900.30.20

Compulsory accessories / Accessori obbligatori


Drivers / Alimentatori



Driver / Alimentatore		Not included
220-240V(100-127V)	500mA/20W(15W)/IP20/DALI	1Z0241180.500




Driver / Alimentatore		Not included
220-240V(100-127V)	500mA/20W(15W)/IP20/PUSH - 1-10V	1Z0240870.500



Driver / Alimentatore		Not included
220-240V	500mA/20W/IP20/TRIAC/IGBT	1Z0240850.500

486

487

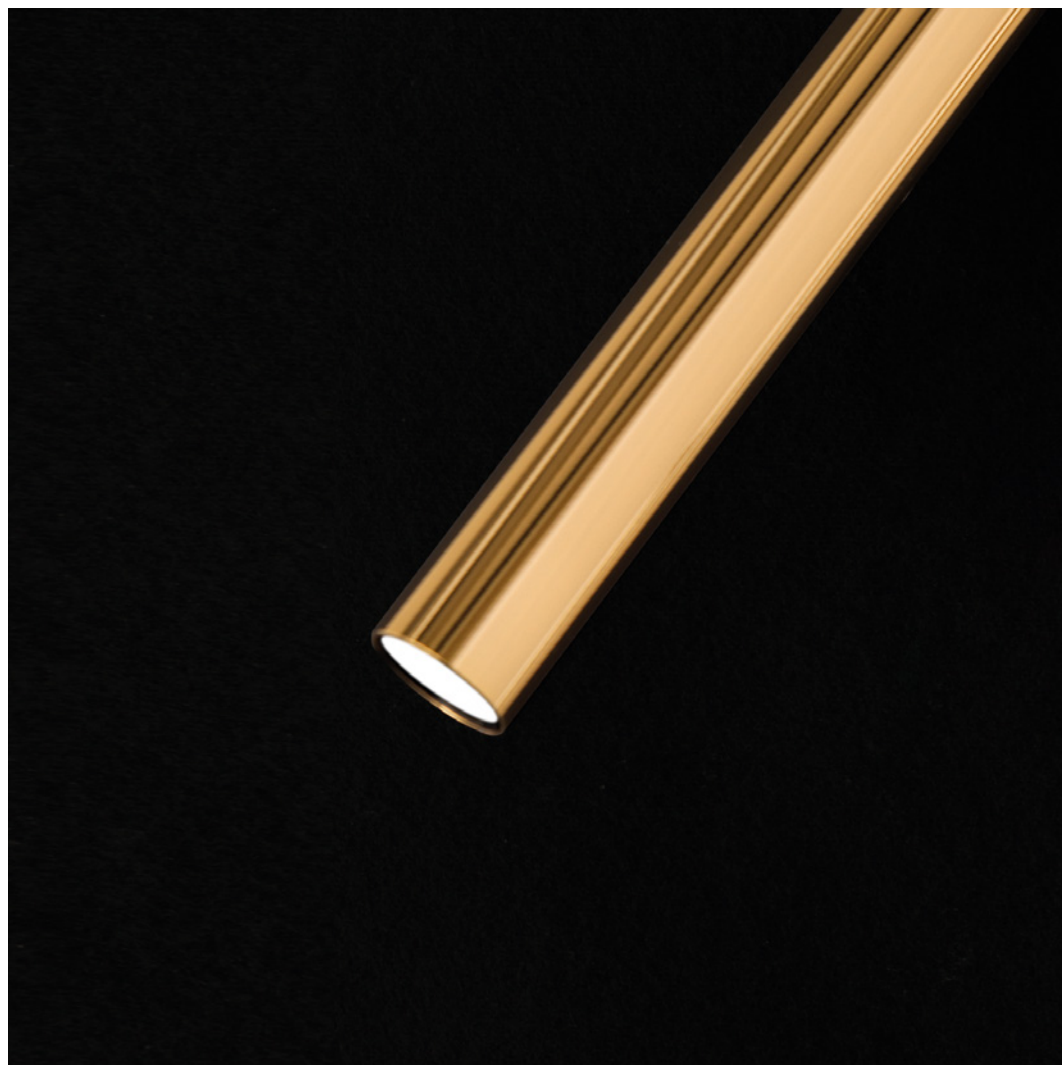



NULLA

Davide Groppi / 2010

An extreme expression of subtraction, uniting optics and electronics as an answer to the ultimate challenge: the absence of structural support and the essence of light.

Nulla is a project that represents both the beginning and end of our work on light. It's the beginning, in the sense that we have always been looking for absolute light, one coming from a distance, almost without a source.

It's the end in that every time we look at Nulla, we feel as though we can't get it better than that.

Nulla generates light and propagates mystery. Nulla is the most generous of our lamps.

Its sole objective is to hide and give all the attention to whatever it is lighting.

What we see is only a tiny black hole, as if it were drawn on the ceiling.

A circle in the ceiling hiding a very bright LED and lens to project the light.

XXIII Compasso d'Oro ADI Award 2014

Un lavoro estremo di sottrazione, che unisce elettronica e l'ottica verso la sfida finale: l'assenza del supporto e l'essenza della luce.

Nulla è un progetto che rappresenta l'inizio e la fine del nostro lavoro sulla luce.

L'inizio perché da sempre cerchiamo la luce assoluta, quella che arriva da lontano, quasi senza fonte. La fine perché ogni volta che guardiamo Nulla ci sembra di non potere andare più avanti di così.

Nulla genera luce e diffonde mistero. È la più generosa delle nostre lampade, quella che si nasconde al solo scopo di regalare la scena al soggetto illuminato.

Ciò che appare è solo un minuscolo buco nero, quasi disegnato.


Un foro nel soffitto, un LED potentissimo e una lente che generano la luce.

XXIII Premio Compasso d'Oro ADI 2014




Recessed / Direct / Indoor		
Material	Metal	
Finish	.00 Standard	
Note	Recessed luminaire. Visible 18 / 25 mm diameter hole. NULLA 18 and NULLA 25: lamp extractable for maintenance.	

Apparecchio illuminante da incasso. Foro visibile con diametro da 18 / 25 mm. NULLA 18 e NULLA 25: apparecchio estraibile per manutenzione.



NULLA - 23°
14W
24V DC
2700K - 347lm / 3000K - 357lm
CRI >90
Beam 23°
UGR <19
Driver not included
CE IP20/IP65

Standard - 2700K	1A4100000.27.20
Standard - 3000K	1A4100000.30.20



NULLA - 32°
14W
24V DC
2700K - 403lm / 3000K - 415lm
CRI >90
Beam 32°
UGR <19
Driver not included
CE IP20/IP65

Standard - 2700K	1A2110000.27.20
Standard - 3000K	1A2110000.30.20



NULLA 18 - 20°
4,5W
24V DC
2700K - 174lm / 3000K - 186lm
CRI >90
Beam 20°
UGR <19
Driver not included
CE IP20

Standard - 2700K	1A2010000.27.20
Standard - 3000K	1A2010000.30.20



NULLA 25 - 23°
9W
24V DC
2700K - 304lm / 3000K - 327lm
CRI >90
Beam 23°
UGR <19
Driver not included
CE IP20/IP65

Standard - 2700K	1A4080000.27.20
Standard - 3000K	1A4080000.30.20



NULLA 25 - 32°
9W
24V DC
2700K - 384lm / 3000K - 413lm
CRI >90
Beam 32°
UGR <19
Driver not included
CE IP20/IP65


Standard - 2700K	1A2020000.27.20
Standard - 3000K	1A2020000.30.20

Compulsory accessories / Accessori obbligatori


Installation kits / Kit d'installazione




Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm				Not included
Matt Black	Cut-out Ø 21 mm Minimum space for mounting 100 mm IP65	NULLA	1A2200400.00.00	




Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm				Not included
Matt Black	Cut-out Ø 22 mm Minimum space for mounting 190 mm	NULLA 18	1A2210400.00.00	



Masonry Box / Cassaforma per laterizio				Not included
Standard		NULLA 18	1A2390000.00.00	




Concrete box / Cassaforma per cemento				Not included
Standard		NULLA 18	1A2240000.00.00	



Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm				Not included
Matt Black	Cut-out Ø 35 mm Minimum space for mounting 190 mm	NULLA 25	1A2170400.00.00	




Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm				Not included
Matt Black	Cut-out Ø 35 mm Minimum space for mounting 145 mm IP65	NULLA 25	1A3980400.00.00	




Plasterboard flange (bottom) ≠ 12,5 mm / Flangia (da sotto) per cartongesso ≠ 12,5 mm				Not included
Matt Black	Cut-out Ø 35 mm Minimum space for mounting 145 mm IP65	NULLA 25	1A4960400.00.00	

Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione




Masonry Box / Cassaforma per laterizio				Not included
Standard		NULLA 25	1A2380000.00.00	




Concrete box / Cassaforma per cemento				Not included
Standard		NULLA 25	1A2230000.00.00	


Drivers / Alimentatori



Driver / Alimentatore				Not included
220-240V(100-127V)	24V/16W(15W)/IP20/DALI		1Z0241180.24	



Driver / Alimentatore				Not included
220-240V(100-127V)	24V/20W(15W)/IP20/PUSH - 1-10V		1Z0240870.24	




Driver / Alimentatore				Not included
220-240V	24V/20W/IP20/TRIAC/IGBT		1Z0240850.24	

Optional accessories / Accessori opzionali


Installation kits / Kit d'installazione




Trapdoor for plasterboard 12,5 mm / Botola per cartongesso 12,5 mm				Not included
Standard	Cut-out 205x205 mm	NULLA	1A3780000.00.00	




Trapdoor for plasterboard 12,5 mm / Botola per cartongesso 12,5 mm				Not included
Standard	Cut-out 415x415 mm	NULLA	1A3790000.00.00	

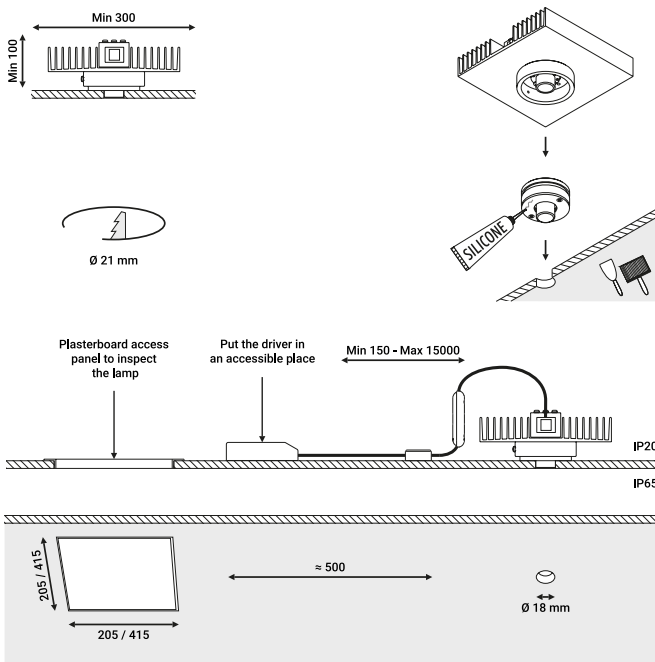


1A2200400.00.00 - NULLA installation conditions

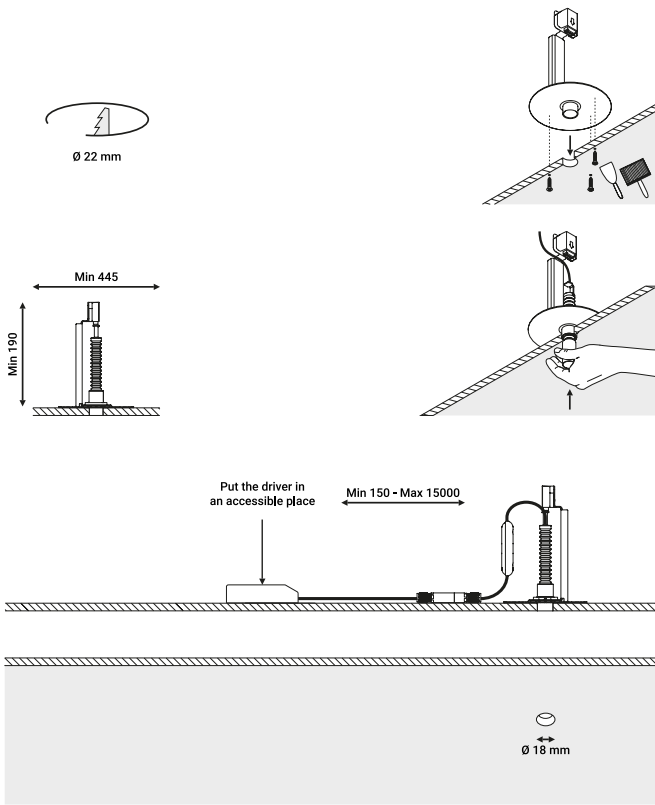


1A2210400.00.00 - NULLA 18 installation conditions

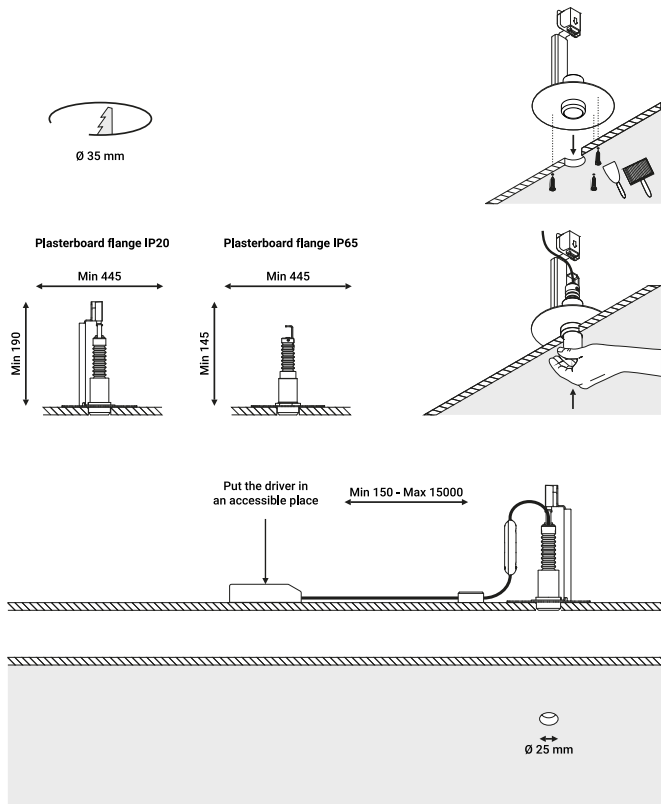


1A2170400.00.00 - 1A3980400.00.00 - NULLA 25 installation conditions

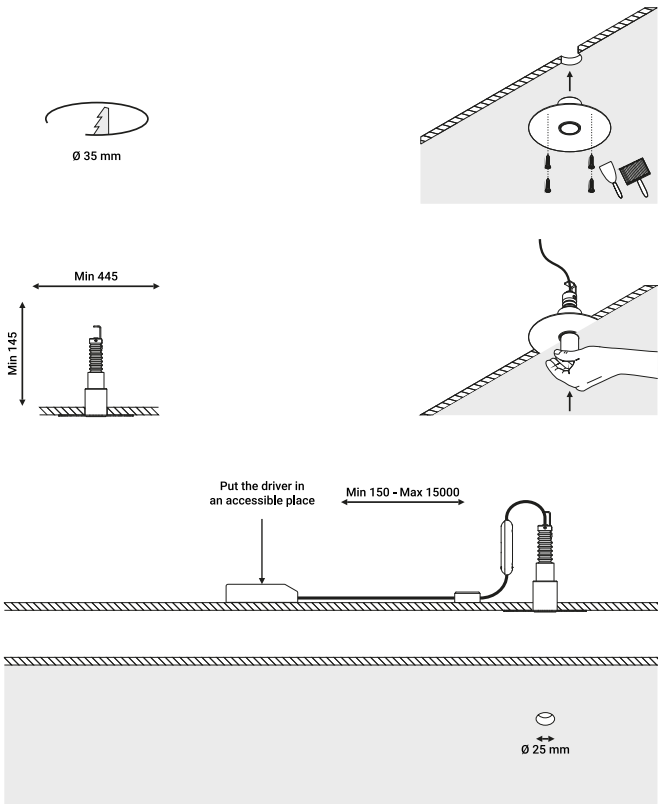

1A4960400.00.00 - NULLA 25 installation conditions

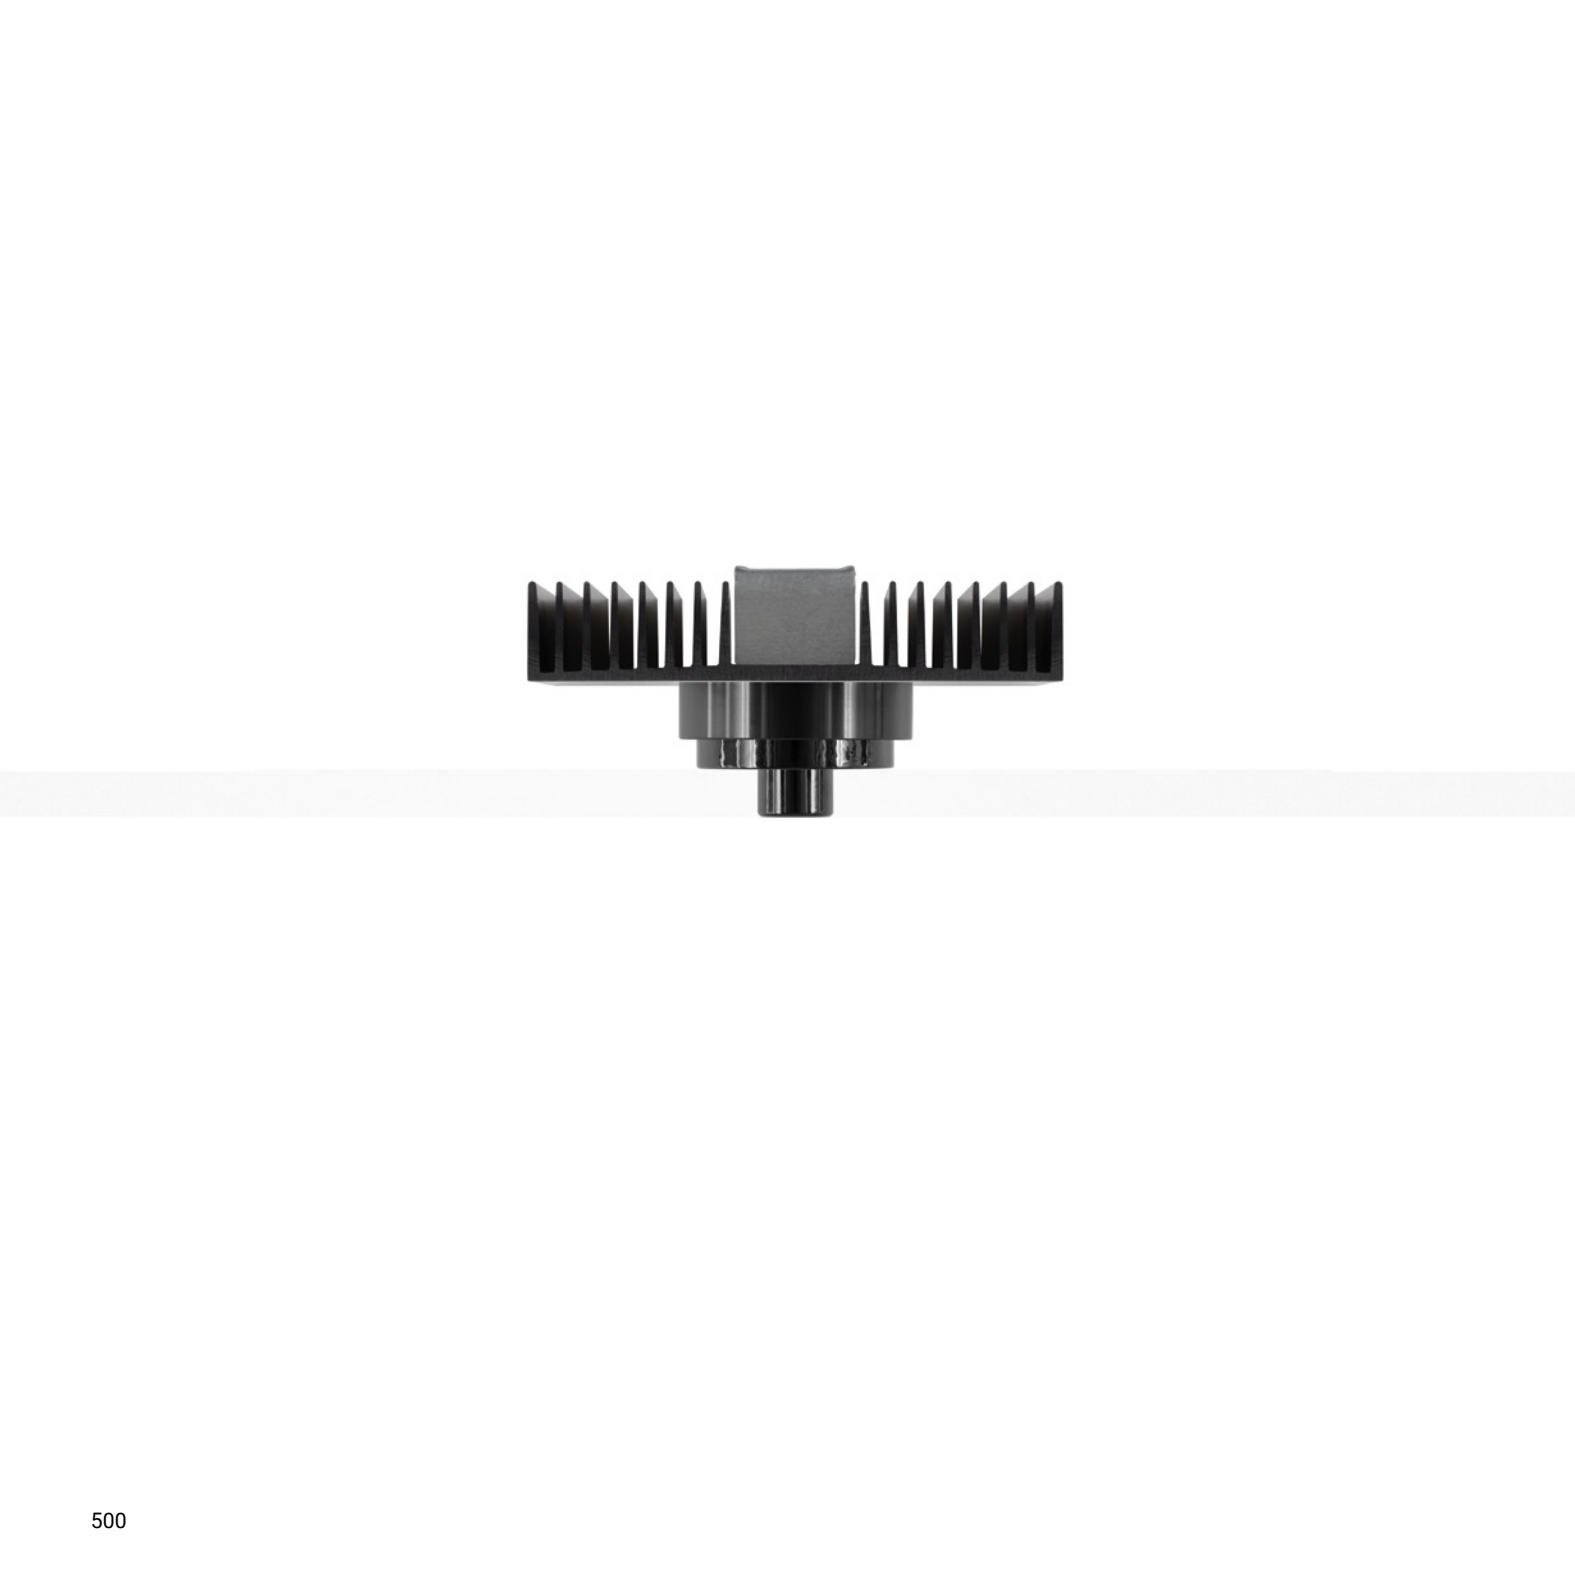


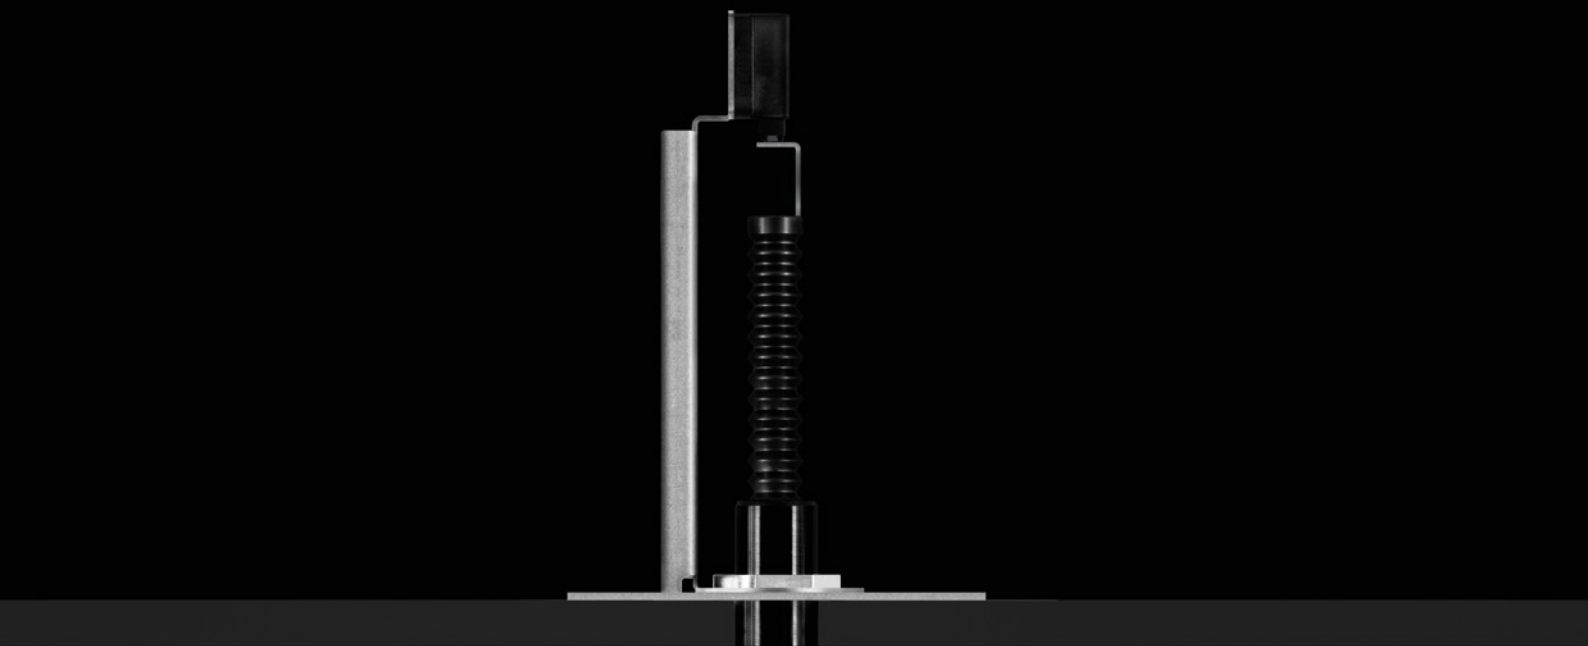





Osteria Francescana Restaurant
Modena

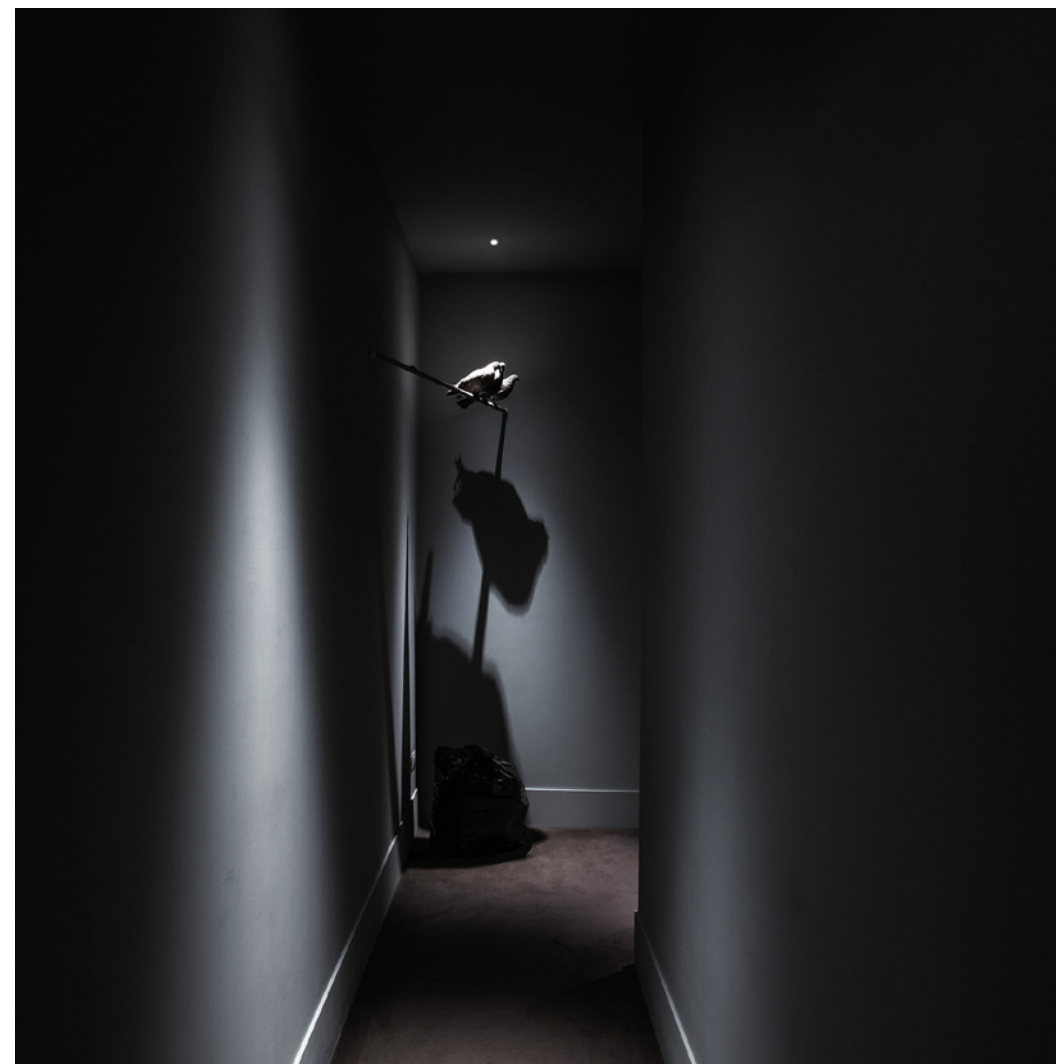



A tool to light.

The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.

Elemento di luce.

Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.
La luce si integra con lo spazio diventando elemento architettonico.

Recessed / Direct / Indoor			
Material	Metal		
Finish	.03 Matt White	.04	Matt Black
Note	Recessed luminaire. Adjustable in all directions. Plasterboard hole: 133x148 mm. Minimum space for recessed installation: 180 mm.		

	PUNTO		
	Max 21W		
	Max 500mA DC		
	Driver not included		
	LED module not included		
	   IP20		
	Matt White	1A1100300.00.20	
	Matt Black	1A1100400.00.20	




Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione		
	Plasterboard frame 12,5 mm / Cornice per cartongesso 12,5 mm	
	Not included	
	Matt White	Cut-out 133x148 mm Minimum space for mounting 180 mm
		1A3510300.00.00
Matt Black	Cut-out 133x148 mm	1A3510400.00.00
	Minimum space for mounting 180 mm	

LED modules / Moduli LED

	DG111 LED module / Modulo LED DG111	
	Not included	
	16,7W - 15° - 500mA DC	1A4700000.27.20
	2700K - 1648lm - CRI >90	
	Energy Efficiency F - Dimmable	
	16,7W - 15° - 500mA DC	1A4700000.30.20
	3000K - 1682lm - CRI >90	
	Energy Efficiency F - Dimmable	
	DG111 LED module / Modulo LED DG111	
	Not included	
	16,7W - 22° - 500mA DC	1A3890000.27.20
	2700K - 1859lm - CRI >90	
	Energy Efficiency F - Dimmable	
	16,7W - 22° - 500mA DC	1A3890000.30.20
	3000K - 1943lm - CRI >90	
	Energy Efficiency F - Dimmable	
	DG111 LED module / Modulo LED DG111	
	Not included	
	16,7W - 36° - 500mA DC	1A3900000.27.20
	2700K - 1795lm - CRI >90	
	Energy Efficiency F - Dimmable	
	16,7W - 36° - 500mA DC	1A3900000.30.20
	3000K - 1890lm - CRI >90	
	Energy Efficiency F - Dimmable	

Drivers / Alimentatori

	Driver / Alimentatore	
	Not included	
	220-240V(100-127V)	500mA/20W(15W)/IP20/DALI
		1Z0241180.500
	Driver / Alimentatore	
	Not included	
	220-240V(100-127V)	500mA/20W(15W)/IP20/PUSH
		1Z0240840.500
	Driver / Alimentatore	
	Not included	
	220-240V	500mA/20W/IP20/TRIAC/IGBT
		1Z0240850.500

Optional accessories / Accessori opzionali

Other accessories / Altri accessori



Accessory holder + Soft filter + Honeycomb louvre / Porta accessori + Filtro soft + Frangiluce nido d'ape		Not included
Matt Black	1X0070400.04.00	



Accessory holder + Elliptical filter / Porta accessori + Filtro ellittico		Not included
Matt Black	1X0070400.05.00	



Blue filter / Filtro blu		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.06.00




Red filter / Filtro rosso		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.07.00



Yellow filter / Filtro giallo		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.08.00






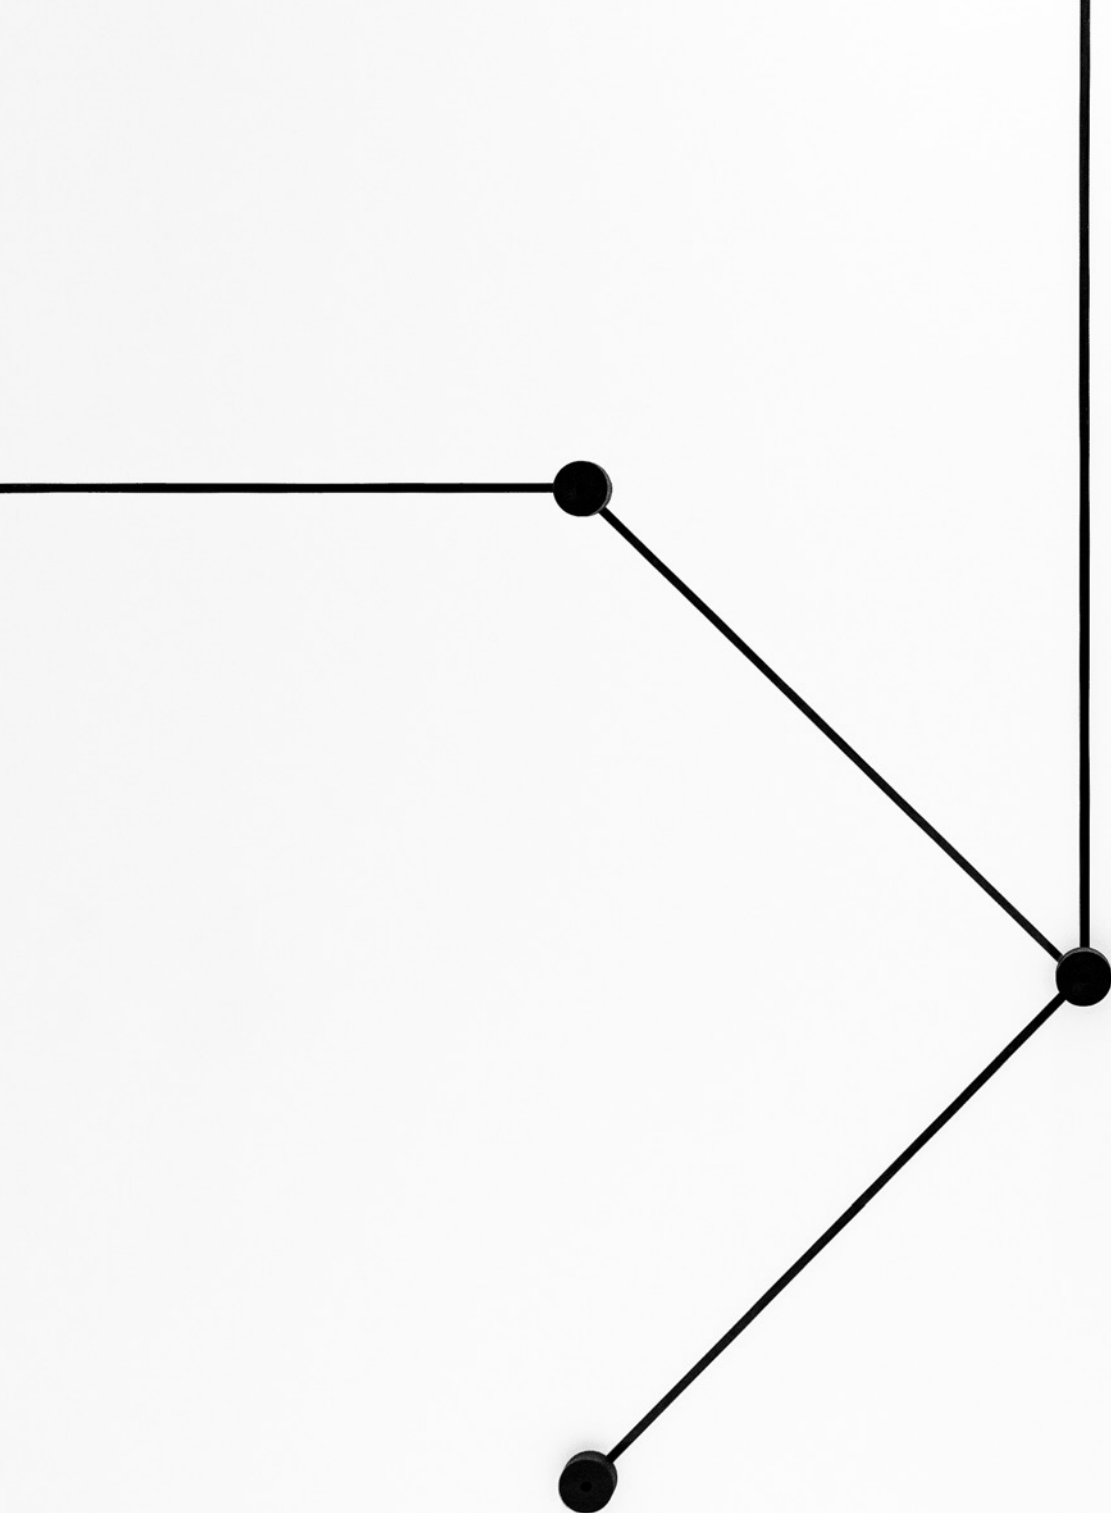




Absolute freedom, absolute spatiality, absolute creativity.
An adhesive tape that conducts electricity can be placed anywhere
on walls and ceilings to power our lighting projects.
Endless is the system created and patented by our Team in order to transport
electric energy in a digital and graphic manner.
It's the idea of considering walls and ceilings like electronic circuits,
where luminaires can be done fixed freely and easily.
This system comes with various accessories
to provide and manage the flow of electricity.

Libertà assoluta, spazialità assoluta, creatività assoluta.
Un nastro conduttore e adesivo che può essere disposto a piacimento
su pareti e soffitti per alimentare i nostri modelli.
Endless è il sistema ideato e brevettato dal nostro Team
per portare "differenza di potenziale" dove si desidera in modo grafico e digitale.
È l'idea di considerare le pareti e i soffitti come circuiti elettronici
per posizionare gli apparecchi illuminanti con la massima libertà.
Il sistema è dotato di vari accessori di alimentazione e derivazione.


ENDLESS ON/OFF
(Max 48V DC -
Max 150W - Max 4A)

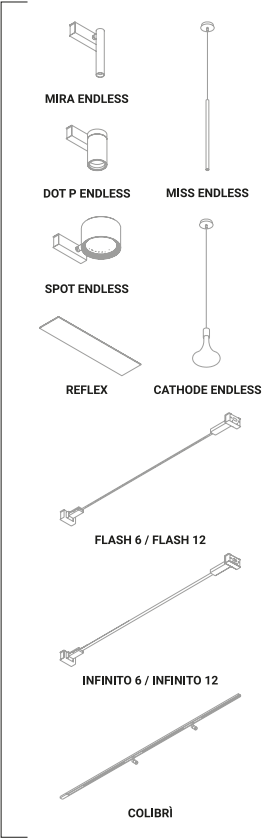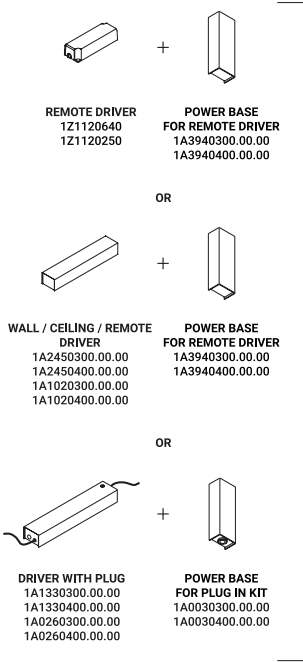


ENDLESS dimmable
(Max 48V DC -
Max 150W - Max 4A)

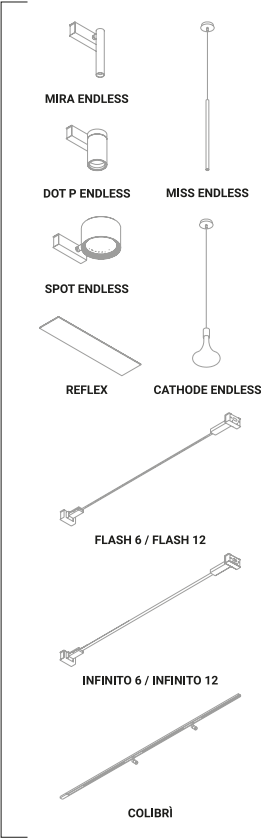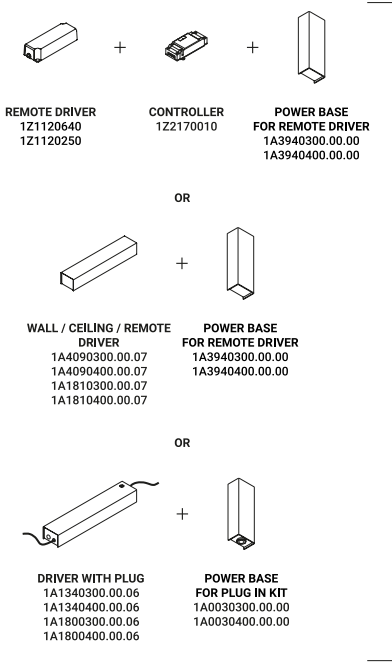


ENDLESS CASAMBI
(Max 48V DC -
Max 150W - Max 4A)

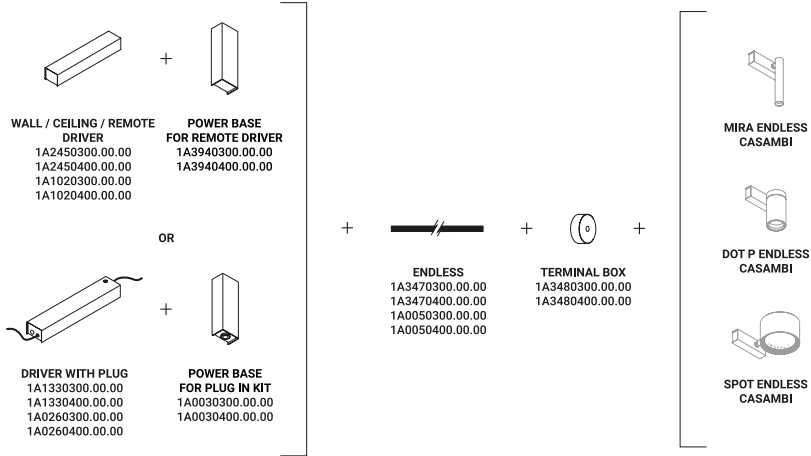

ENDLESS conductive tape
used with voltage/current
other than 48V DC

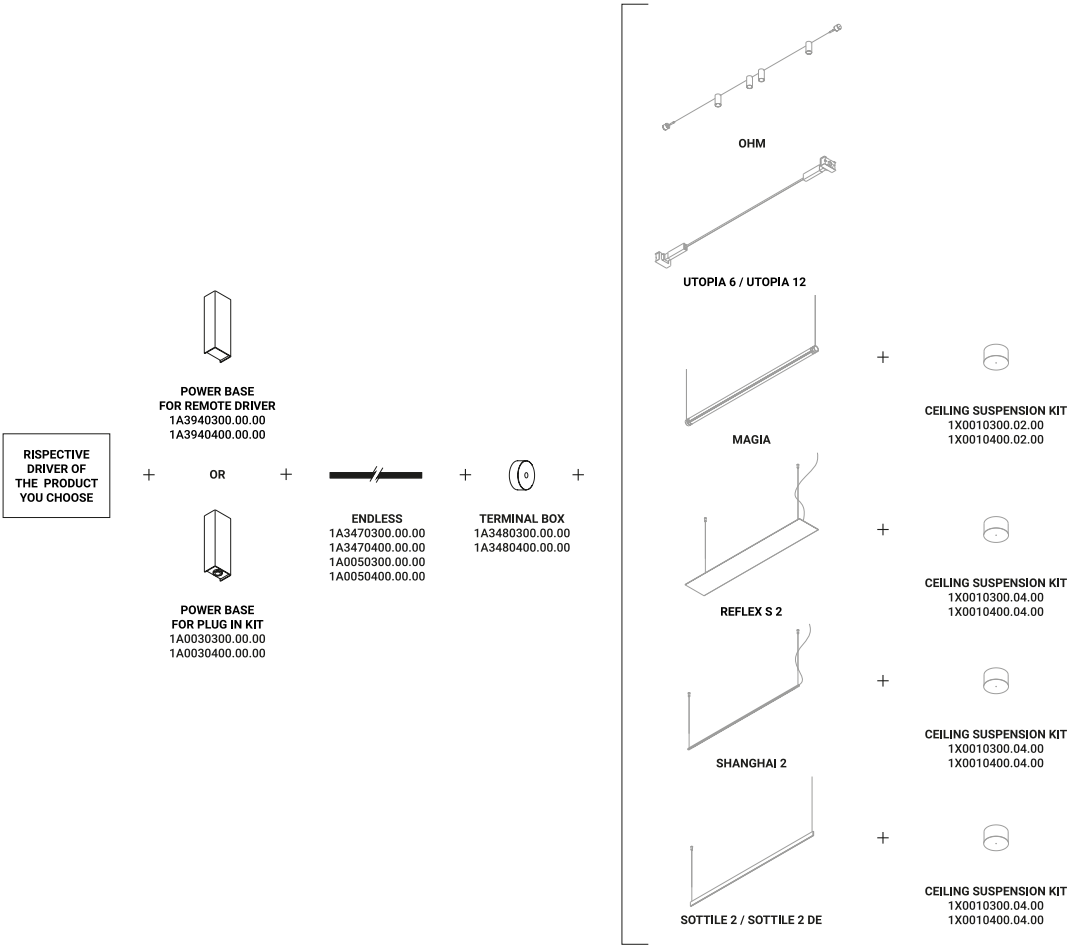

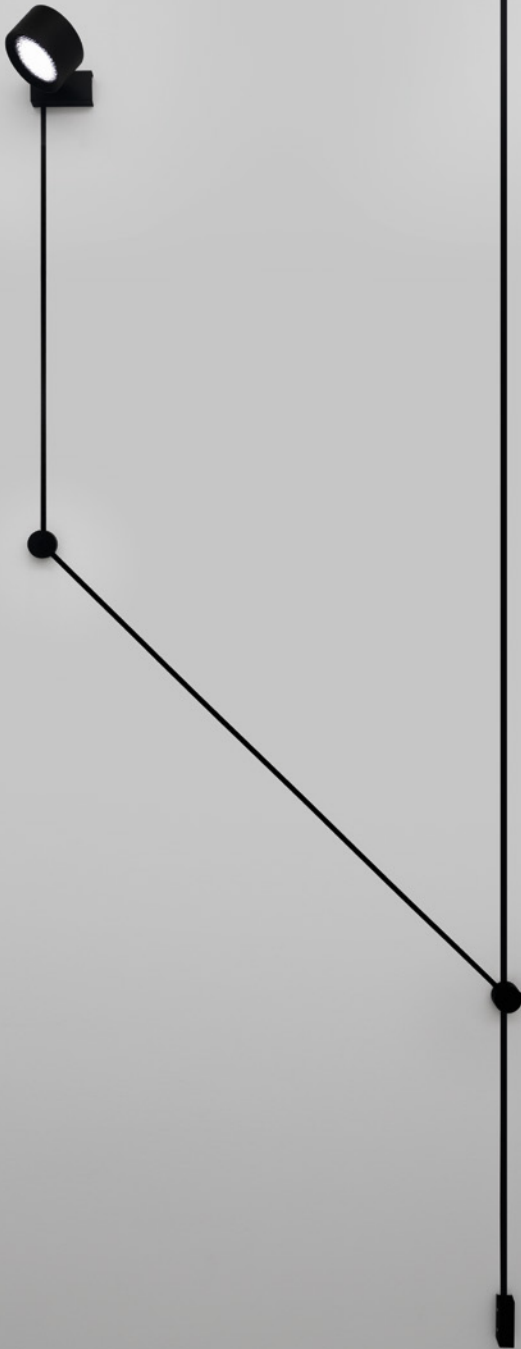

Davide Groppi / 2018

ENDLESS

Systems / Direct-Indirect-Diffuse / Indoor

Material Metal
Finish .00 Standard

Note System consisting of a conductive adhesive tape to apply to surfaces. *Sistema costituito da un nastro conduttivo adesivo applicabile alle superfici.*
Possibility to connect several lamps (Max 48V DC - Max 150W - Max 4A). *Possibilità di collegare più apparecchi (Max 48V DC - Max 150W - Max 4A).*

Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione



Strip Endless - 5 m / Strip Endless - 5 m			Not included
Matt White	Max 48V DC - Max 150W - Max 4A	1A3470300.00.00	
Matt Black	Max 48V DC - Max 150W - Max 4A	1A3470400.00.00	




Strip Endless - 10 m / Strip Endless - 10 m			Not included
Matt White	Max 48V DC - Max 150W - Max 4A	1A0050300.00.00	
Matt Black	Max 48V DC - Max 150W - Max 4A	1A0050400.00.00	




Fixing rough walls kit / Kit di fissaggio per pareti ruvide			Not included
Length 2,5 m		1A0370000.00.00	



Terminal box / Scatola di collegamento			Not included
Matt White	2 Terminals included	1A3480300.00.00	
Matt Black	2 Terminals included	1A3480400.00.00	



Power base for plug in kit / Base di alimentazione per kit con spina			Not included
Matt White		1A0030300.00.00	
Matt Black		1A0030400.00.00	




Power base for remote driver / Base di alimentazione per alimentatore remoto			Not included
Matt White		1A3940300.00.00	
Matt Black		1A3940400.00.00	




Terminals / Morsetti			Not included
2 Pieces		1A3490000.00.00	

Compulsory accessories / Accessori obbligatori


Drivers for ENDLESS ON/OFF system and CASAMBI / Alimentatori per ENDLESS ON/OFF e CASAMBI




Driver with plug / Alimentatore con spina		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - ON/OFF	1A1330300.00.00
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - ON/OFF	1A1330400.00.00



Wall/ceiling/remote driver / Alimentatore parete/soffitto/remoto		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - ON/OFF	1A2450300.00.00
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - ON/OFF	1A2450400.00.00




Driver with plug / Alimentatore con spina		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - ON/OFF	1A0260300.00.00
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - ON/OFF	1A0260400.00.00




Wall/ceiling/remote driver / Alimentatore parete/soffitto/remoto		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - ON/OFF	1A1020300.00.00
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - ON/OFF	1A1020400.00.00

Compulsory accessories / Accessori obbligatori


Drivers for ENDLESS dimmable system / Alimentatori per ENDLESS dimmerabile




Driver with plug / Alimentatore con spina		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - Dimmer on board	1A1340300.00.06
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - Dimmer on board	1A1340400.00.06



Wall/ceiling driver / Alimentatore parete/soffitto		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - DALI - PUSH - 1-10V	1A4090300.00.07
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - DALI - PUSH - 1-10V	1A4090400.00.07



Driver with plug / Alimentatore con spina		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - Dimmer on board	1A1800300.00.06
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - Dimmer on board	1A1800400.00.06




Wall/ceiling driver / Alimentatore parete/soffitto		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - DALI - PUSH - 1-10V	1A1810300.00.07
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - DALI - PUSH - 1-10V	1A1810400.00.07




Compulsory accessories / Accessori obbligatori


Remote drivers for ENDLESS / Alimentatori remoti per ENDLESS



Driver / Alimentatore		Not included
100-240V	48V/60W/IP67/ON/OFF	1Z1120640




Driver / Alimentatore		Not included
100-240V	48V/150W/IP67/1-10V	1Z1120250




Controller		Not included
DALI - PUSH - 0/1-10V - TRIAC - IP20		1Z2170010

Integrated products with ENDLESS system / Prodotti compatibili con il sistema ENDLESS - Absorption Max 3,125A		Wattage (W)	Ampere (A)
Power Kit:			
1A133XX00.00.00	Driver with plug - 48V - ON/OFF	Max 60	Max 1,25
1A245XX00.00.00	Wall/ceiling/remote driver - 48V - ON/OFF	Max 60	Max 1,25
1A026XX00.00.00	Driver with plug - 48V - ON/OFF	Max 150	Max 3,12
1A102XX00.00.00	Wall/ceiling/remote driver - 48V - ON/OFF	Max 150	Max 3,12
1A134XX00.00.06	Driver with plug - 48V - Dimmer on board	Max 60	Max 1,25
1A409XX00.00.07	Wall/ceiling driver - 48V - DALI - PUSH - 1-10V	Max 60	Max 1,25
1A180XX00.00.06	Driver with plug - 48V - Dimmer on board	Max 150	Max 3,12
1A181XX00.00.07	Wall/ceiling driver - 48V - DALI - PUSH - 1-10V	Max 150	Max 3,12
1Z1120640	Remote driver - 48V - ON/OFF	Max 60	Max 1,25
1Z1120250	Remote driver - 48V - 1-10V	Max 150	Max 3,12
Elements:			
1A2980300.27.40	CATHODE ENDLESS - Matt White - 2700K	6,3	0,16
1A2980300.30.40	CATHODE ENDLESS - Matt White - 3000K	6,3	0,16
1A2980800.27.40	CATHODE ENDLESS - Brushed Brass - 2700K	6,3	0,16
1A2980800.30.40	CATHODE ENDLESS - Brushed Brass - 3000K	6,3	0,16
1A2982800.27.40	CATHODE ENDLESS - Polished Black Chrome - 2700K	6,3	0,16
1A2982800.30.40	CATHODE ENDLESS - Polished Black Chrome - 3000K	6,3	0,16
1A4260400.27.01	COLIBRÌ 18 - 15° - Matt Black - 2700K - DALI	2	0,05
1A4260400.30.01	COLIBRÌ 18 - 15° - Matt Black - 3000K - DALI	2	0,05
1A4270400.27.01	COLIBRÌ 18 - 25° - Matt Black - 2700K - DALI	2	0,05
1A4270400.30.01	COLIBRÌ 18 - 25° - Matt Black - 3000K - DALI	2	0,05
1A4280400.27.01	COLIBRÌ 28 - 15° - Matt Black - 2700K - DALI	4	0,10
1A4280400.30.01	COLIBRÌ 28 - 15° - Matt Black - 3000K - DALI	4	0,10
1A4290400.27.01	COLIBRÌ 28 - 25° - Matt Black - 2700K - DALI	5	0,13
1A4290400.30.01	COLIBRÌ 28 - 25° Matt Black - 3000K - DALI	5	0,13
1A2340300.27.40	DOT P ENDLESS - Matt White - 2700K	13	0,34
1A2340300.30.40	DOT P ENDLESS - Matt White - 3000K	13	0,34
1A2340400.27.40	DOT P ENDLESS - Matt Black - 2700K	13	0,34
1A2340400.30.40	DOT P ENDLESS - Matt Black - 3000K	13	0,34
1A2344900.27.40	DOT P ENDLESS - Matt Black/Polished Gold - 2700K	13	0,34
1A2344900.30.40	DOT P ENDLESS - Matt Black/Polished Gold - 3000K	13	0,34
1A2340300.27.41	DOT P ENDLESS CASAMBI - Matt White - 2700K	15,5	0,40
1A2340300.30.41	DOT P ENDLESS CASAMBI - Matt White - 3000K	15,5	0,40
1A2340400.27.41	DOT P ENDLESS CASAMBI - Matt Black - 2700K	15,5	0,40
1A2340400.30.41	DOT P ENDLESS CASAMBI - Matt Black - 3000K	15,5	0,40
1A2344900.27.41	DOT P ENDLESS CASAMBI - Matt Black/Polished Gold - 2700K	15,5	0,40
1A2344900.30.41	DOT P ENDLESS CASAMBI - Matt Black/Polished Gold - 3000K	15,5	0,40
1A2130300.27.20	FLASH 6 - Matt White - 2700K	57	1,48
1A2130300.30.20	FLASH 6 - Matt White - 3000K	57	1,48
1A2130400.27.20	FLASH 6 - Matt Black - 2700K	57	1,48
1A2130400.30.20	FLASH 6 - Matt Black - 3000K	57	1,48


Integrated products with ENDLESS system / Prodotti compatibili con il sistema ENDLESS - Absorption Max 3,125A		Wattage (W)	Ampere (A)
1A2150300.27.20	FLASH 12 - Matt White - 2700K	114	2,97
1A2150300.30.20	FLASH 12 - Matt White - 3000K	114	2,97
1A2150400.27.20	FLASH 12 - Matt Black - 2700K	114	2,97
1A2150400.30.20	FLASH 12 - Matt Black - 3000K	114	2,97
1A2250300.27.20	INFINITO 6 - Matt White - 2700K	57	1,48
1A2250300.30.20	INFINITO 6 - Matt White - 3000K	57	1,48
1A2250400.27.20	INFINITO 6 - Matt Black - 2700K	57	1,48
1A2250400.30.20	INFINITO 6 - Matt Black - 3000K	57	1,48
1A2260300.27.20	INFINITO 12 - Matt White - 2700K	114	2,97
1A2260300.30.20	INFINITO 12 - Matt White - 3000K	114	2,97
1A2260400.27.20	INFINITO 12 - Matt Black - 2700K	114	2,97
1A2260400.30.20	INFINITO 12 - Matt Black - 3000K	114	2,97
1A2280300.27.40	MIRA ENDLESS - Matt White - 2700K	6	0,16
1A2280300.30.40	MIRA ENDLESS - Matt White - 3000K	6	0,16
1A2280400.27.40	MIRA ENDLESS - Matt Black - 2700K	6	0,16
1A2280400.30.40	MIRA ENDLESS - Matt Black - 3000K	6	0,16
1A2284900.27.40	MIRA ENDLESS - Matt Black/Polished Gold - 2700K	6	0,16
1A2284900.30.40	MIRA ENDLESS - Matt Black/Polished Gold - 3000K	6	0,16
1A2280300.27.41	MIRA ENDLESS CASAMBI - Matt White - 2700K	7	0,18
1A2280300.30.41	MIRA ENDLESS CASAMBI - Matt White - 3000K	7	0,18
1A2280400.27.41	MIRA ENDLESS CASAMBI - Matt Black - 2700K	7	0,18
1A2280400.30.41	MIRA ENDLESS CASAMBI - Matt Black - 3000K	7	0,18
1A2284900.27.41	MIRA ENDLESS CASAMBI - Matt Black/Polished Gold - 2700K	7	0,18
1A2284900.30.41	MIRA ENDLESS CASAMBI - Matt Black/Polished Gold - 3000K	7	0,18
1A2960300.27.40	MISS ENDLESS - Matt White - 2700K	6,3	0,16
1A2960300.30.40	MISS ENDLESS - Matt White - 3000K	6,3	0,16
1A2960400.27.40	MISS ENDLESS - Matt Black - 2700K	6,3	0,16
1A2960400.30.40	MISS ENDLESS - Matt Black - 3000K	6,3	0,16
1A2960800.27.40	MISS ENDLESS - Brushed Brass - 2700K	6,3	0,16
1A2960800.30.40	MISS ENDLESS - Brushed Brass - 3000K	6,3	0,16
1A2962600.27.40	MISS ENDLESS - Total Black - 2700K	6,3	0,16
1A2962600.30.40	MISS ENDLESS - Total Black - 3000K	6,3	0,16
1A2962800.27.40	MISS ENDLESS - Polished Black Chrome - 2700K	6,3	0,16
1A2962800.30.40	MISS ENDLESS - Polished Black Chrome - 3000K	6,3	0,16
1A5500400.27.20	REFLEX - Matt Black - 2700K	40	1,04
1A5500400.30.20	REFLEX - Matt Black - 3000K	40	1,04
1A1080300.00.40	SPOT ENDLESS - Matt White	Max 13	Max 0,34
1A1080400.00.40	SPOT ENDLESS - Matt Black	Max 13	Max 0,34
1A1084900.00.40	SPOT ENDLESS - Matt Black/Polished Gold	Max 13	Max 0,34
1A1080300.00.41	SPOT ENDLESS CASAMBI - Matt White	Max 15,5	Max 0,40
1A1080400.00.41	SPOT ENDLESS CASAMBI - Matt Black	Max 15,5	Max 0,40
1A1084900.00.41	SPOT ENDLESS CASAMBI - Matt Black/Polished Gold	Max 15,5	Max 0,40

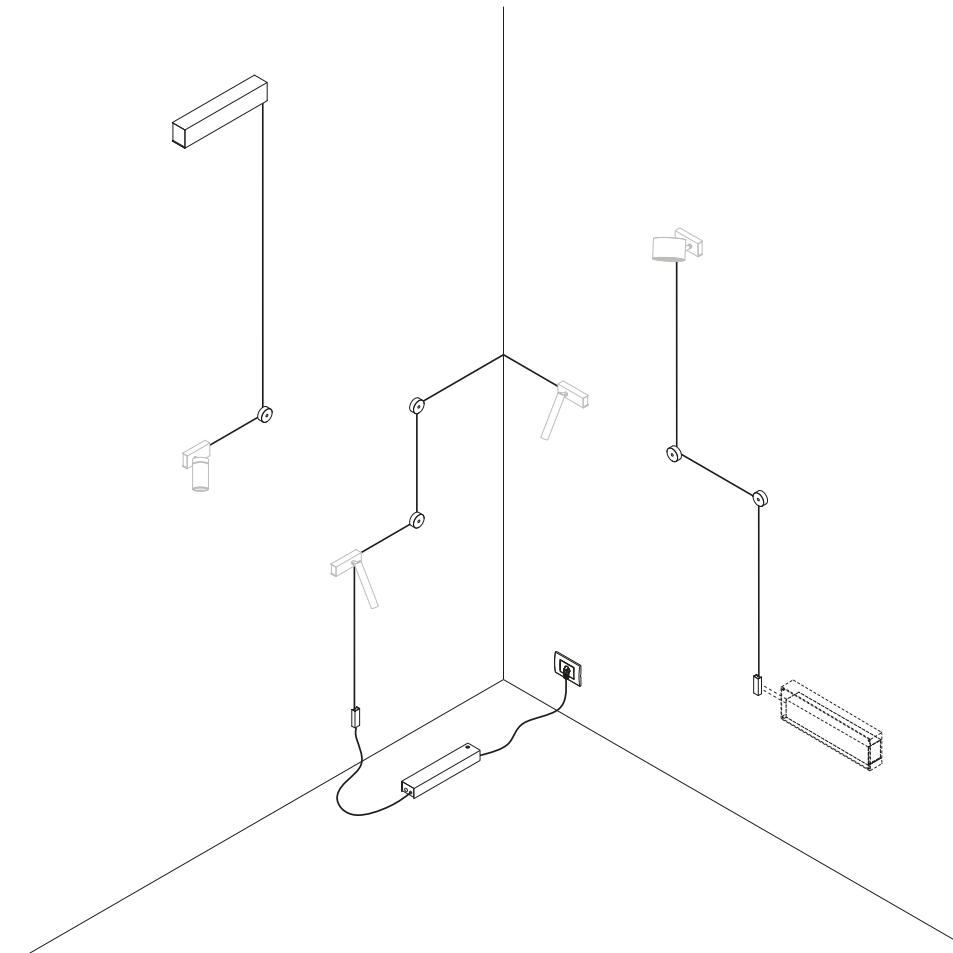


Examples of installation with the three different power supply modes

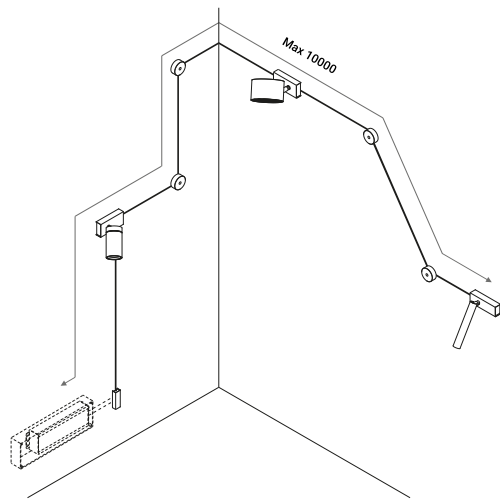


Example of combined installation between various devices with remote driver

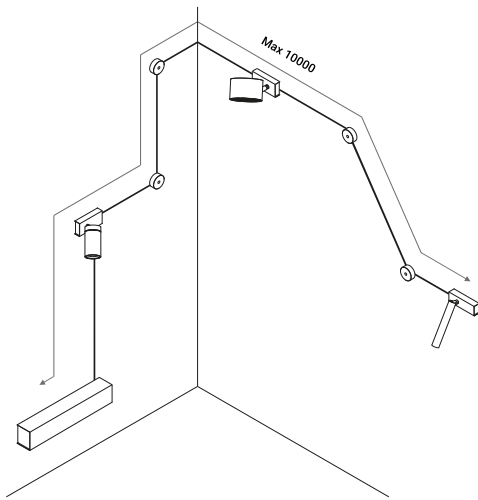


Example of combined installation between various devices with wall/ceiling driver

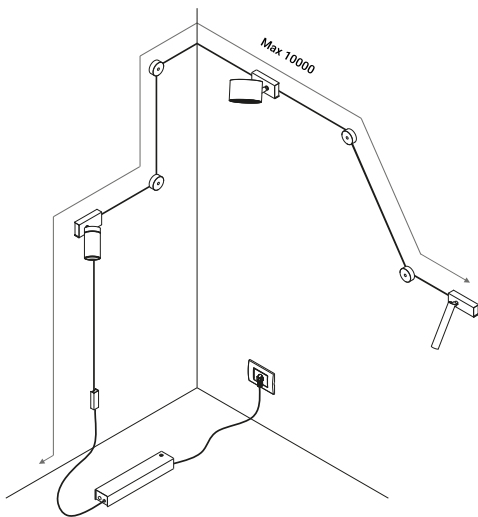

Example of combined installation between various devices with driver with plug

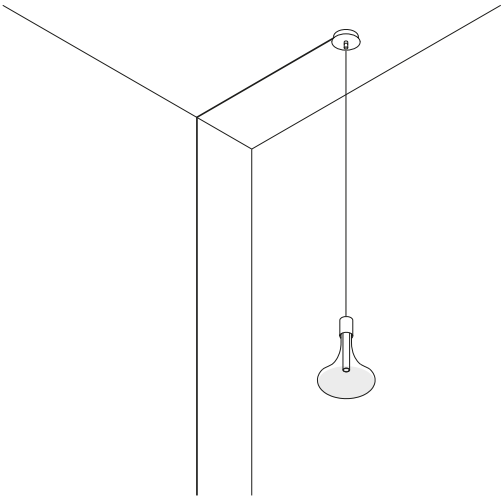


CATHODE: example of installation

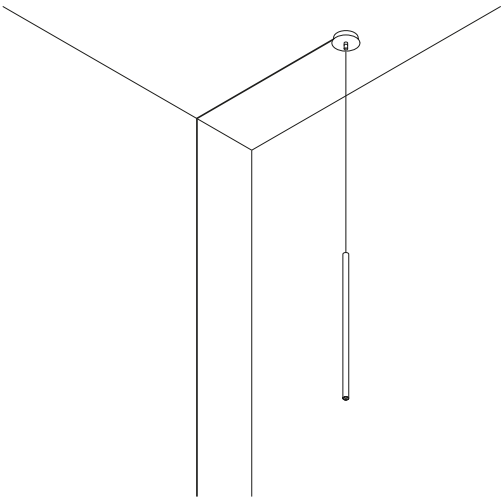


MISS: example of installation




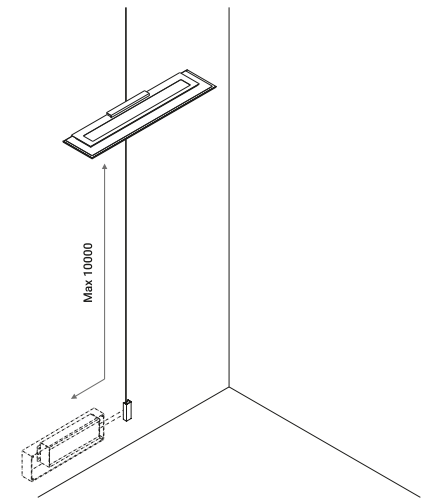


REFLEX: example of installation with remote driver

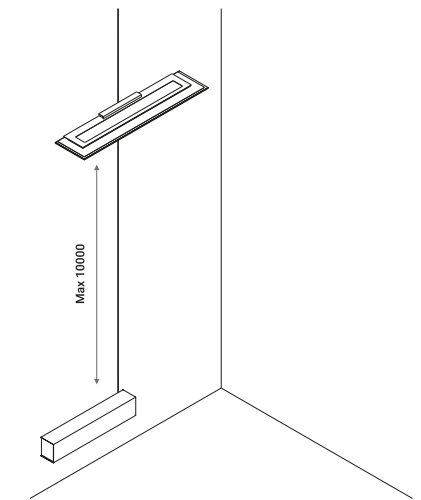


REFLEX: example of installation with wall/ceiling driver

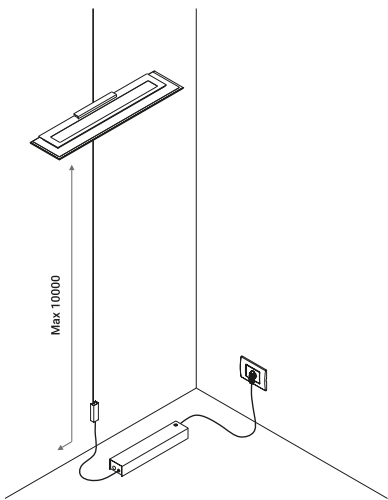


REFLEX: example of installation with driver with plug

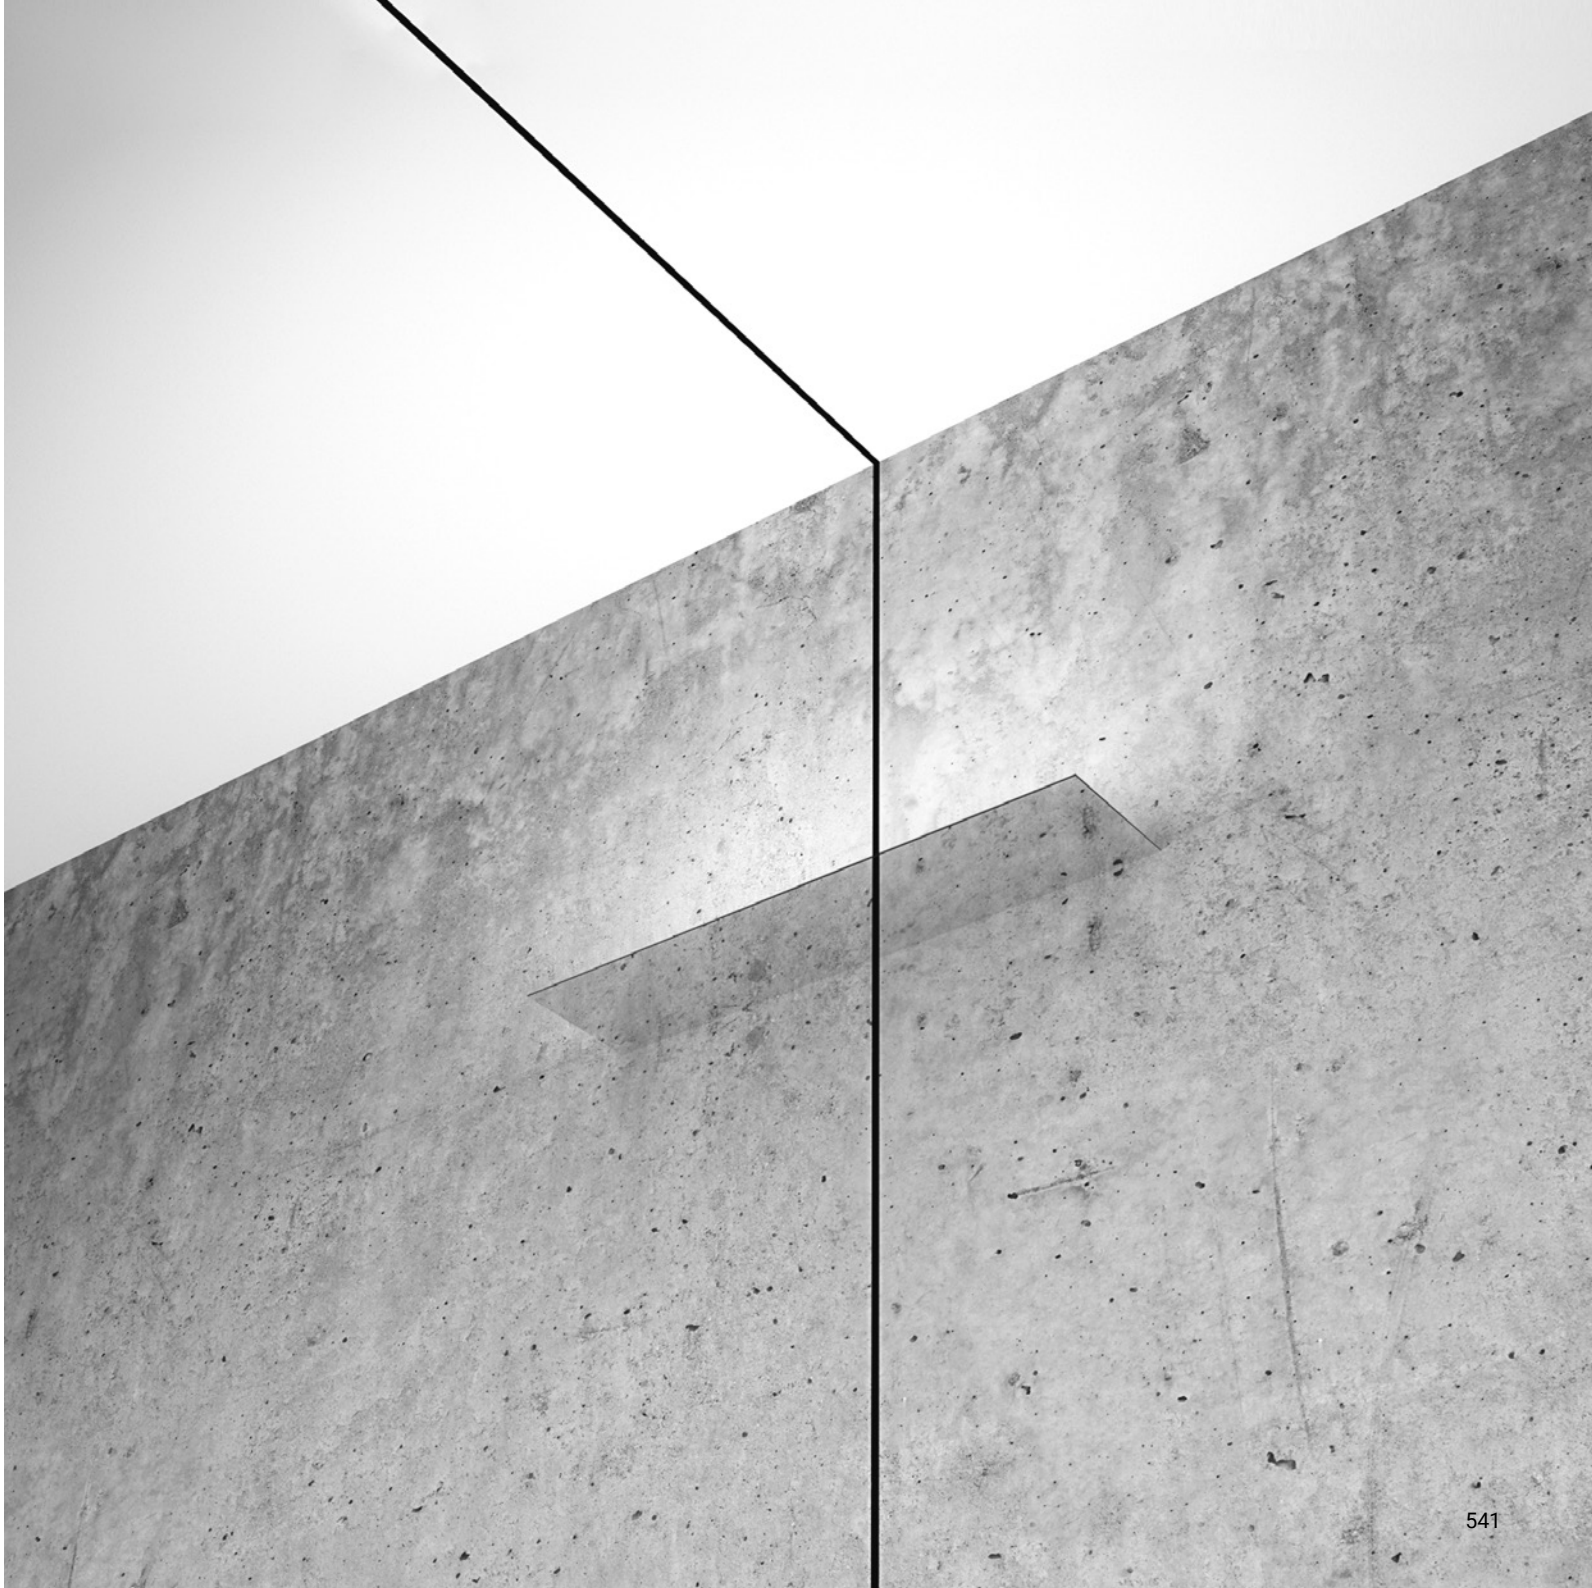


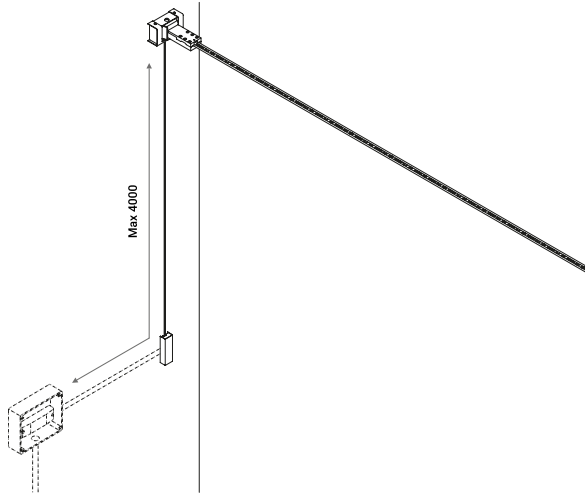

FLASH and INFINITO: example of installation with remote driver

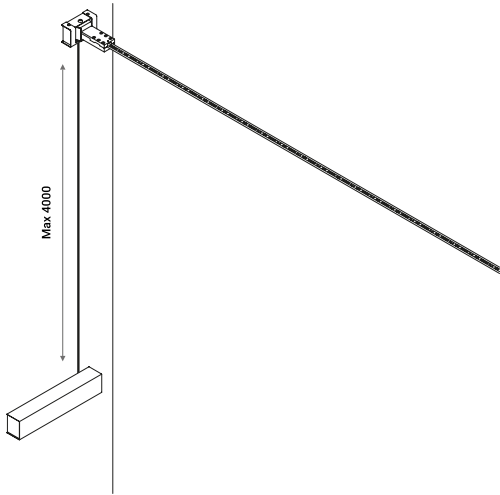


FLASH and INFINITO: example of installation with wall/ceiling driver

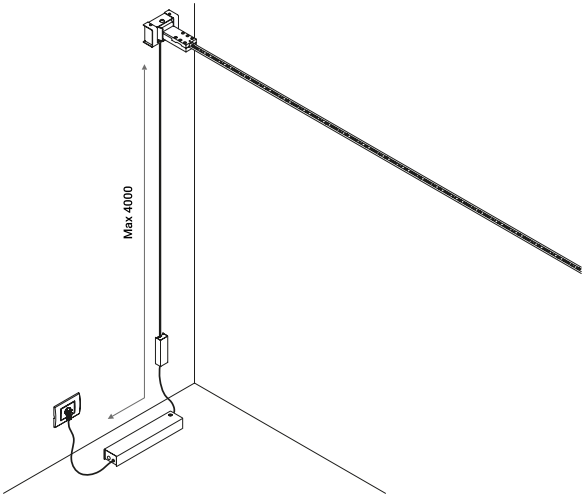

FLASH and INFINITO: example of installation with driver with plug




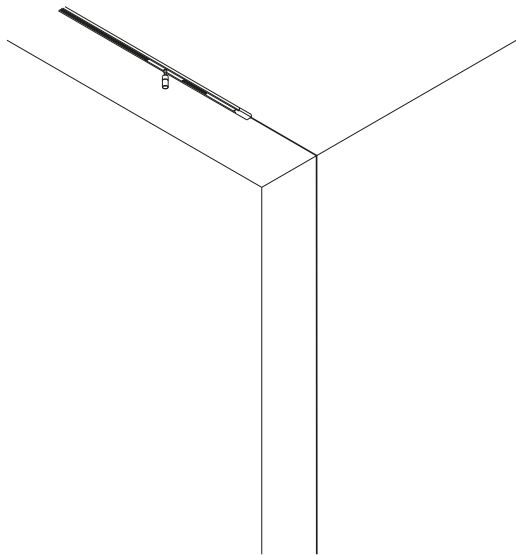


COLIBRI: example of installation




1A4170000.20.00
COLIBRI ENDLESS connector

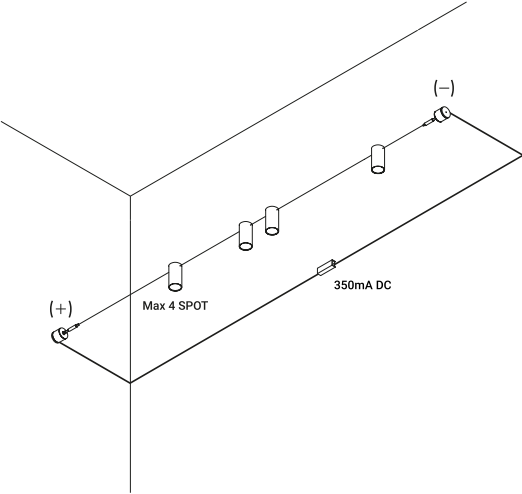

OHM: example of installation

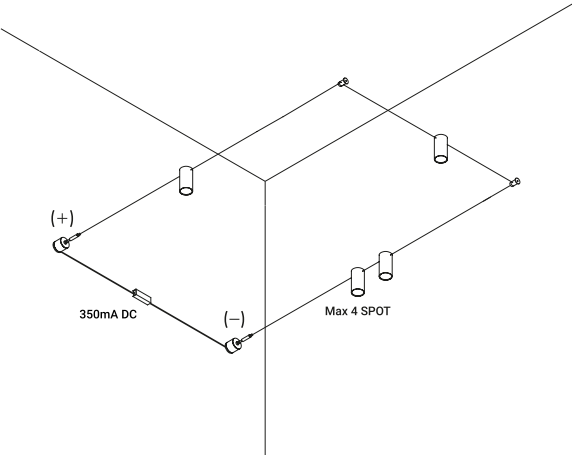


OHM: example of installation

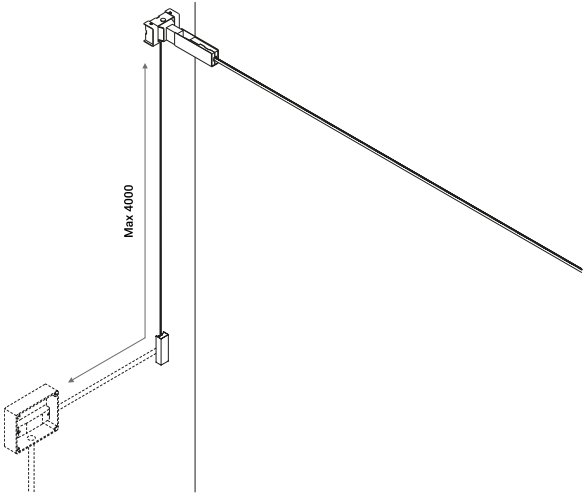

UTOPIA: example of installation

1X001XX00.02.00 - 1X001XX00.04.00
Ceiling suspension kit

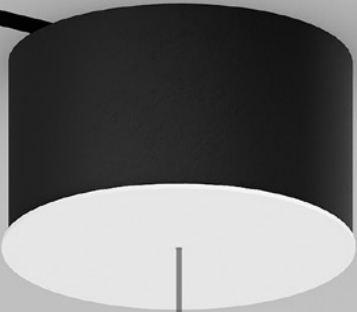



FLASH

Davide Groppi / 2017

It is our Infinito model turned around, with the light flowing downwards.
The 9 mm wide stainless steel strip can run perfectly up to 36 metres in length
(standard versions at 6 / 12 / 18 metres in length).

The ideal solution for direct illumination of spaces with very high ceilings.

Its name pays homage to the famous comic book superhero,
who can run seven times the speed of light.

Luminaire designed also to be powered by ENDLESS system.

È la declinazione del nostro modello Infinito, ma con la luce diretta verso il basso.

Il nastro in acciaio inossidabile, largo 9 millimetri, può essere teso perfettamente
fino a 36 metri di lunghezza (lampada standard 6 / 12 / 18 metri).


La soluzione ideale per l'illuminazione diretta di spazi con grande altezza.

Il nome è un omaggio al leggendario supereroe dei fumetti.


Famoso perché corre sette volte più veloce della luce...

Apparecchio illuminante alimentabile anche con il sistema ENDLESS.


How to order -
FLASH 6

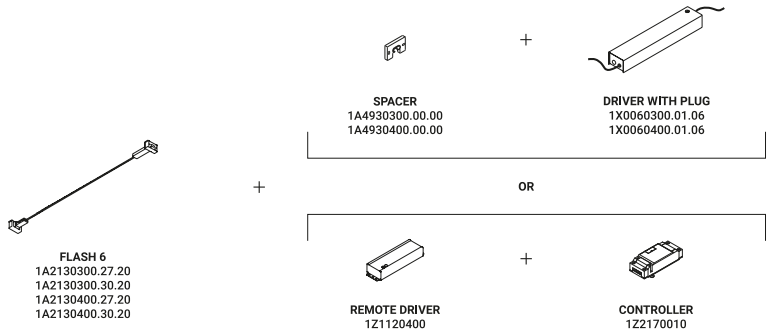

How to order -
FLASH 12

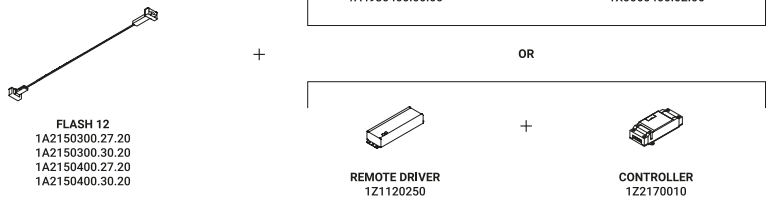


How to order -
FLASH 18

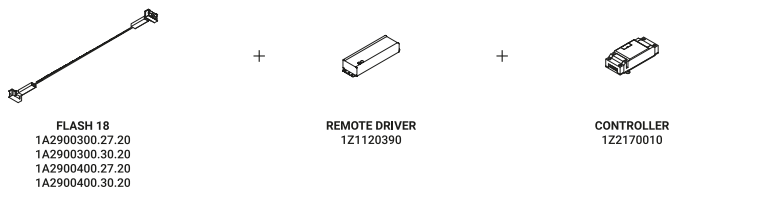

Wall-Systems / Direct / Indoor


Material	Metal	
Finish	.03 Matt White	.04 Matt Black

Note	Special stainless steel tape (9 mm) running from wall to wall. Available in 6 / 12 / 18 m with a single power unit and uniform lighting. Available in Dual emission (DE) and Tunable White (TW – 5 / 10 m) versions. LED strip that can be divided every 96,6 mm. DE versions are available with dual on/off (two drivers required). FLASH 6 and FLASH 12: possibility for the luminaires to be powered by ENDLESS system (Max 48V DC - Max 150W - Max 4A) and to be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.	Speciale nastro (9 mm) in acciaio inox teso da parete a parete. Disponibileda6/12/18mconun'unicaalimentazioneeeilluminamentouniforme. Disponibile in versione a Doppia Emissione (DE) e in versione Tunable White (TW – 5 / 10 m). Strip LED sezionabile ogni 96,6 mm. Le versioni DE sono realizzabili con doppia accensione (necessari due driver). FLASH 6 e FLASH 12: apparecchi illuminanti alimentabili anche con il sistema ENDLESS (Max 48V DC - Max 150W - Max 4A) ed utilizzabili, sullo stesso circuito, con i modelli ENDLESS. Vedi pagina ENDLESS.




FLASH 6
57W - 1,48A
48V DC
2700K - 6576lm / 3000K - 6708lm
CRI >90
Driver not included
CE IP20 E

Matt White - 2700K	1A2130300.27.20
Matt White - 3000K	1A2130300.30.20
Matt Black - 2700K	1A2130400.27.20
Matt Black - 3000K	1A2130400.30.20



FLASH 12
114W - 2,97A
48V DC
2700K - 13152lm / 3000K - 13416lm
CRI >90
Driver not included
CE IP20 E


Matt White - 2700K	1A2150300.27.20
Matt White - 3000K	1A2150300.30.20
Matt Black - 2700K	1A2150400.27.20
Matt Black - 3000K	1A2150400.30.20




FLASH 18
171W
48V DC
2700K - 19728lm / 3000K - 20124lm
CRI >90
Driver not included
CE IP20

Matt White - 2700K	1A2900300.27.20
Matt White - 3000K	1A2900300.30.20
Matt Black - 2700K	1A2900400.27.20
Matt Black - 3000K	1A2900400.30.20



How to order -
FLASH 6 DE

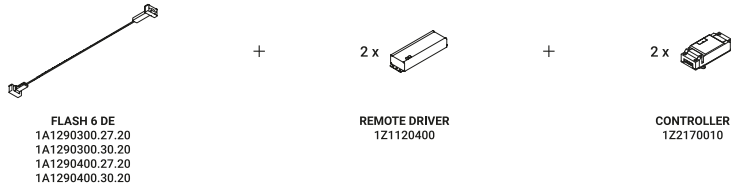

How to order -
FLASH 12 DE

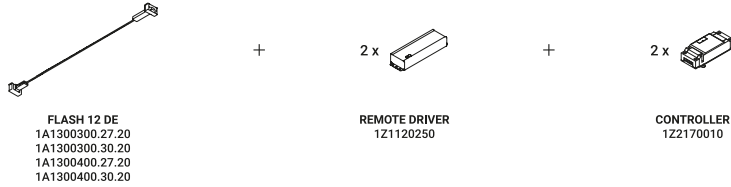


How to order -
FLASH 18 DE

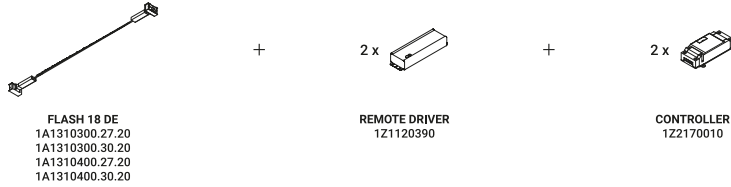

FLASH 6 DE
Dual emission
114W
48V DC
2700K - Up 6576lm - Down 6576lm /
3000K - Up 6708lm - Down 6708lm
CRI >90
Driver not included
CE IP20

Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K


1A1290300.27.20
1A1290300.30.20
1A1290400.27.20
1A1290400.30.20



FLASH 12 DE
Dual emssion
228W
48V DC
2700K - Up 13152lm - Down 13152lm /
3000K - Up 13416lm - Down 13416lm
CRI >90
Driver not included
CE IP20

Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K

1A1300300.27.20
1A1300300.30.20
1A1300400.27.20
1A1300400.30.20




FLASH 18 DE
Dual emission
342W
48V DC
2700K - Up 19728lm - Down 19728lm /
3000K - Up 20124lm - Down 20124lm
CRI >90
Driver not included
CE IP20


Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K

1A1310300.27.20
1A1310300.30.20
1A1310400.27.20
1A1310400.30.20


How to order -
FLASH 5 TW

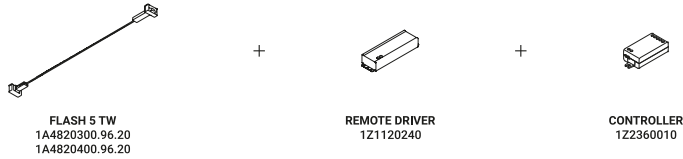

How to order -
FLASH 10 TW

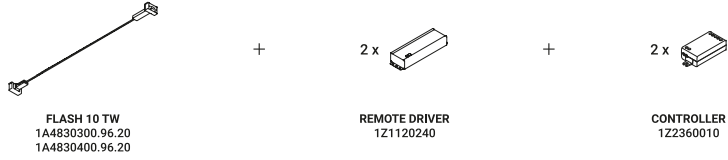


Note Tunable White describes the variable colour temperature controls from warm white to cool white light. *Tunable White è la regolazione variabile della temperatura di colore della luce dalla tonalità calda a quella fredda.*



FLASH 5 TW
Tunable White
96W
24V DC
2700K - 4690lm / 6500K - 5190lm
CRI >90
Driver not included
CE IP20


Matt White - 2700K / 6500K	1A4820300.96.20
Matt Black - 2700K / 6500K	1A4820400.96.20




FLASH 10 TW
Tunable White
192W
24V DC
2700K - 9380lm / 6500K - 10380lm
CRI >90
Driver not included
CE IP20

Matt White - 2700K / 6500K	1A4830300.96.20
Matt Black - 2700K / 6500K	1A4830400.96.20


How to order -
FLASH 5 DE TW

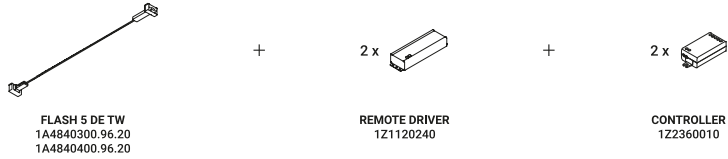

How to order -
FLASH 10 DE TW

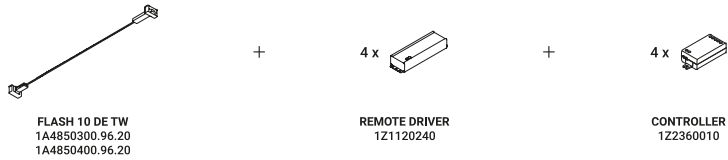


Note Tunable White describes the variable colour temperature controls from warm white to cool white light. *Tunable White è la regolazione variabile della temperatura di colore della luce dalla tonalità calda a quella fredda.*



FLASH 5 DE TW
Dual emission - Tunable White
192W
24V DC
2700K - 9380lm / 6500K - 10380lm
CRI >90
Driver not included
CE IP20

Matt White - 2700K / 6500K	1A4840300.96.20
Matt Black - 2700K / 6500K	1A4840400.96.20




FLASH 10 DE TW
Dual emission - Tunable White
384W
24V DC
2700K - 18760lm / 6500K - 20760lm
CRI >90
Driver not included
CE IP20


Matt White - 2700K / 6500K	1A4850300.96.20
Matt Black - 2700K / 6500K	1A4850400.96.20

Compulsory accessories / Accessori obbligatori


Drivers / Alimentatori




Driver with plug / Alimentatore con spina				Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 80W - IP20 Dimmer on board	FLASH 6	1X0060300.01.06	
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 80W - IP20 Dimmer on board	FLASH 6	1X0060400.01.06	




Driver with plug / Alimentatore con spina				Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 150W - IP20 Dimmer on board	FLASH 12	1X0060300.02.06	
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 150W - IP20 Dimmer on board	FLASH 12	1X0060400.02.06	




Driver / Alimentatore				Not included
100-240V	48V/80W/IP67/1-10V	FLASH 6 / FLASH 6 DE	1Z1120400	



Driver / Alimentatore				Not included
100-240V	48V/150W/IP67/1-10V	FLASH 12 / FLASH 12 DE	1Z1120250	




Driver / Alimentatore				Not included
100-240V	48V/240W/IP67/1-10V	FLASH 18 / FLASH 18 DE	1Z1120390	




Driver / Alimentatore				Not included
100-240V	24V/120W/IP67/1-10V	FLASH 5 TW / FLASH 10 TW / FLASH 5 DE TW / FLASH 10 DE TW	1Z1120240	

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Controller			Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	FLASH 6 / FLASH 12 / FLASH 18 / FLASH 6 DE / FLASH 12 DE / FLASH 18 DE	1Z2170010




Controller Casambi - Tunable White			Not included
		FLASH 5 TW / FLASH 10 TW / FLASH 5 DE TW / FLASH 10 DE TW	1Z2360010

Optional accessories / Accessori opzionali


Installation kits / Kit d'installazione




Spacer / Distanziale				Not included
Matt White	For driver kit with plug	FLASH 6 / FLASH 12	1A4930300.00.00	
Matt Black	For driver kit with plug	FLASH 6 / FLASH 12	1A4930400.00.00	




Ceiling installation kit / Kit d'installazione da soffitto				Not included
Matt White			1A0080300.00.00	
Matt Black			1A0080400.00.00	



Kit wall connection vertical sloped 45° / Kit attacco da parete per inclinazione verticale 45°				Not included
Matt White			1A0120300.00.00	
Matt Black			1A0120400.00.00	




Kit wall connection sloped right 75° / Kit attacco da parete per inclinazione 75° destro				Not included
Matt White			1A0340300.00.00	
Matt Black			1A0340400.00.00	




Kit wall connection sloped left 75° / Kit attacco da parete per inclinazione 75° sinistro				Not included
Matt White			1A0350300.00.00	
Matt Black			1A0350400.00.00	



Swallows / Rondini			Not included
Matt Black			1A0800400.00.00

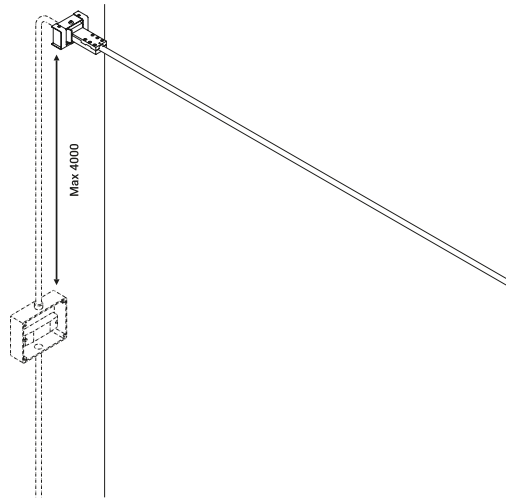


Example of installation with remote driver

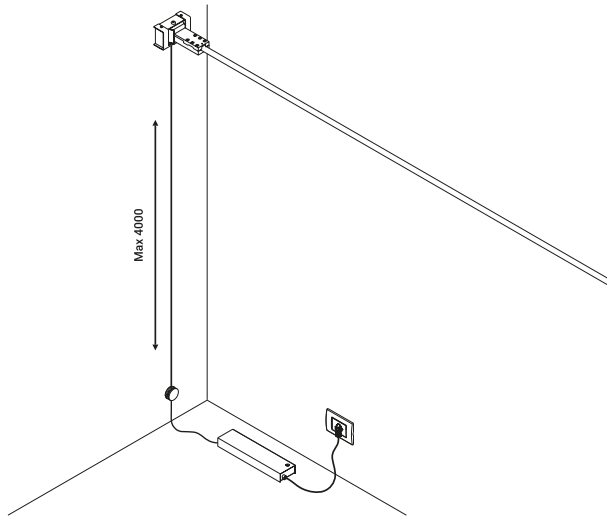


Example of installation with driver with plug




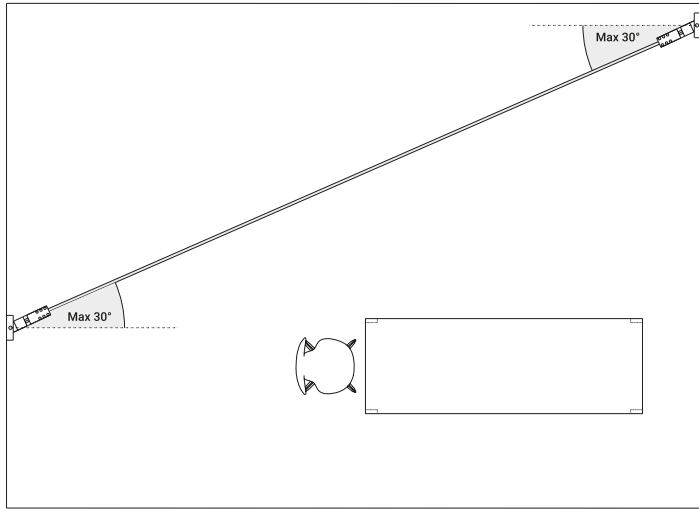


Example of installation with max rotation 30°

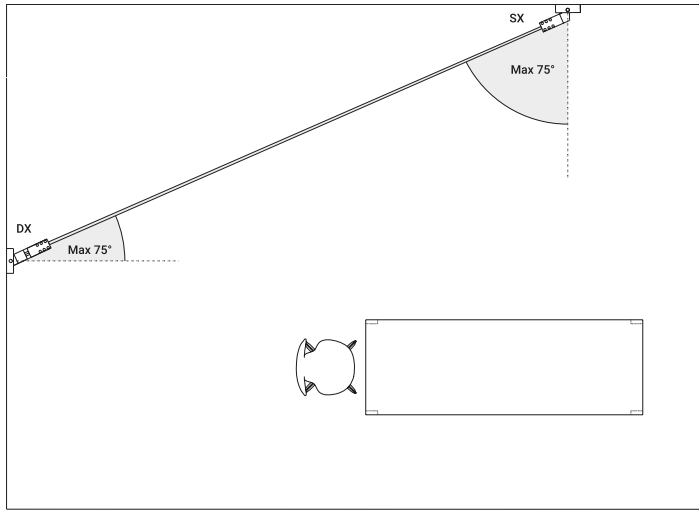

1A0340400.00.00 - 1A0350400.00.00 - Example of installation with kit wall connection sloped 75°

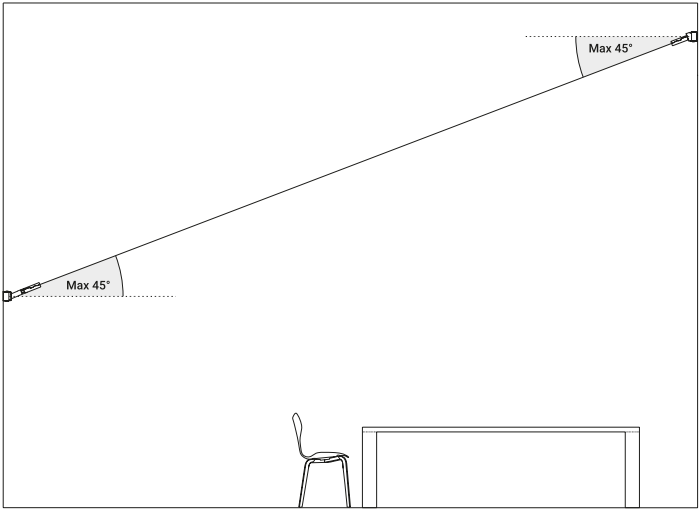

1A0120400.00.00 - Example of installation with kit wall connection vertical sloped 45°

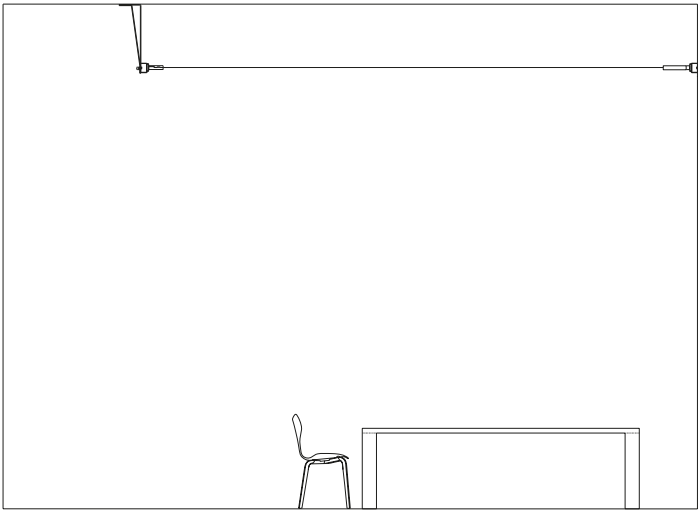

1A0080400.00.00 - Example of installation with ceiling installation kit



Acetaia Maria Luigia
Modena





INFINITO

Davide Groppi / 2016

A spatial concept, it is continuous light.

An ultra-thin strip of special stainless steel just 18 mm wide
"cuts" the space to produce indirect light.

Infinito can be adapted to various situations, stretched from wall to wall.

It comes in strips up to 36 metres in length
(standard versions at 6 / 12 / 18 metres in length). Infinito breaks down the luminaire,
turning it into something else, leaving only a trace,
a line and then not even that, just light.

This project pays homage to the art of Lucio Fontana and his spatial concepts.

The graphic force of this system is surprising. It can be integrated into space,
but at the same time it becomes part of that space. Infinito: essence and absence.

Luminaire designed also to be powered by ENDLESS system.

Archiproducts Design Award 2017

People's Choice AZ Award 2017

È un concetto spaziale, è luce continua.

Un nastro sottilissimo, in un particolare acciaio inossidabile e di soli 18 millimetri di
larghezza, taglia lo spazio e produce luce indiretta. È possibile adattare, tendere e

orientare Infinito da parete a parete, fino a 36 metri di lunghezza

(lampada standard 6 / 12 / 18 metri). Infinito smaterializza l'oggetto lampada,
trasformandolo in qualcos'altro, lasciandone solo una traccia, una riga e poi nemmeno più
quella, solo la luce. È un omaggio all'arte di Lucio Fontana e ai suoi concetti spaziali.


La forza grafica di questo sistema è sorprendente, per la sua capacità di essere integrato
e nello stesso tempo presente nello spazio. Infinito, essenza e assenza.

Apparecchio illuminante alimentabile anche con il sistema ENDLESS.


Archiproducts Design Award 2017

People's Choice AZ Award 2017


How to order - INFINITO 6

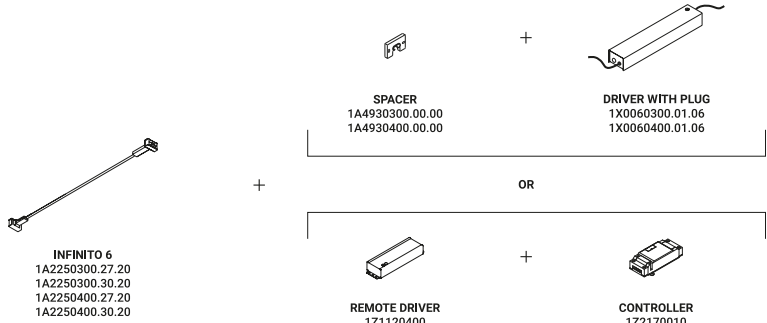

How to order - INFINITO 12

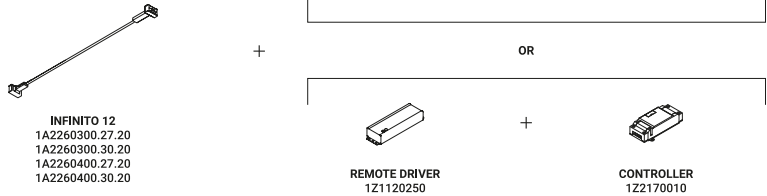

How to order - INFINITO 18

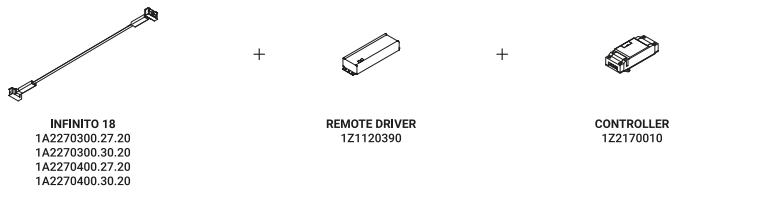


Wall-Systems / Indirect / Indoor

Material	Metal	
Finish	.03 Matt White	.04 Matt Black

Note


Special stainless steel tape (18 mm) stretched from wall to wall. Available in 6 / 12 / 18 m with a single power unit and uniform lighting. Available in Tunable White (TW – 5 / 10 m) version. LED strip that can be divided every 96,6 mm. INFINITO 6 and INFINITO 12: possibility for the luminaires to be powered by ENDLESS system (Max 48V DC - Max 150W - Max 4A) and to be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.

Speciale nastro (18 mm) in acciaio inox teso da parete a parete. Disponibile da 6 / 12 / 18 m con un'unica alimentazione e illuminamento uniforme. Disponibile in versione Tunable White (TW – 5 / 10 m). Strip LED sezionabile ogni 96,6 mm. INFINITO 6 e INFINITO 12: apparecchi illuminanti alimentabili anche con il sistema ENDLESS (Max 48V DC - Max 150W - Max 4A) ed utilizzabili, sullo stesso circuito, con i modelli ENDLESS. Vedi pagina ENDLESS.




INFINITO 6
57W - 1,48A
48V DC
2700K - 6576lm / 3000K - 6708lm
CRI >90
Driver not included
CE IP20 E

Matt White - 2700K	1A2250300.27.20
Matt White - 3000K	1A2250300.30.20
Matt Black - 2700K	1A2250400.27.20
Matt Black - 3000K	1A2250400.30.20



INFINITO 12
114W - 2,97A
48V DC
2700K - 13152lm / 3000K - 13416lm
CRI >90
Driver not included
CE IP20 E


Matt White - 2700K	1A2260300.27.20
Matt White - 3000K	1A2260300.30.20
Matt Black - 2700K	1A2260400.27.20
Matt Black - 3000K	1A2260400.30.20




INFINITO 18
171W
48V DC
2700K - 19728lm / 3000K - 20124lm
CRI >90
Driver not included
CE IP20

Matt White - 2700K	1A2270300.27.20
Matt White - 3000K	1A2270300.30.20
Matt Black - 2700K	1A2270400.27.20
Matt Black - 3000K	1A2270400.30.20


How to order -
INFINITO 5 TW

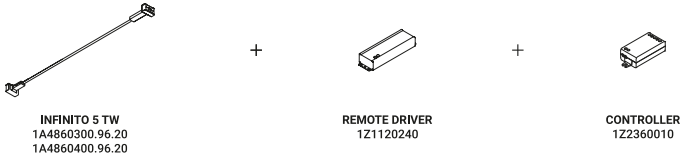

How to order -
INFINITO 10 TW

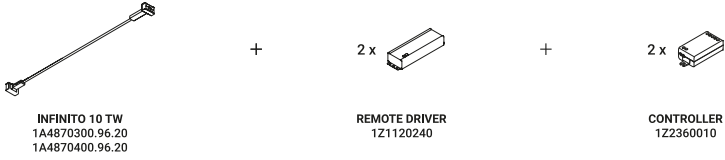


Note Tunable White describes the variable colour temperature controls from warm white to cool white light. *Tunable White è la regolazione variabile della temperatura di colore della luce dalla tonalità calda a quella fredda.*



INFINITO 5 TW
Tunable White
96W
24V DC
2700K - 4690lm / 6500K - 5190lm
CRI >90
Driver not included
CE IP20

Matt White - 2700K / 6500K	1A4860300.96.20
Matt Black - 2700K / 6500K	1A4860400.96.20




INFINITO 10 TW
Tunable White
192W
24V DC
2700K - 9380lm / 6500K - 10380lm
CRI >90
Driver not included
CE IP20


Matt White - 2700K / 6500K	1A4870300.96.20
Matt Black - 2700K / 6500K	1A4870400.96.20

Compulsory accessories / Accessori obbligatori


Drivers / Alimentatori




Driver with plug / Alimentatore con spina				Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 80W - IP20 Dimmer on board	INFINITO 6	1X0060300.01.06	
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 80W - IP20 Dimmer on board	INFINITO 6	1X0060400.01.06	




Driver with plug / Alimentatore con spina				Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 150W - IP20 Dimmer on board	INFINITO 12	1X0060300.02.06	
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 150W - IP20 Dimmer on board	INFINITO 12	1X0060400.02.06	




Driver / Alimentatore				Not included
100-240V	48V/80W/IP67/1-10V	INFINITO 6	1Z1120400	



Driver / Alimentatore				Not included
100-240V	48V/150W/IP67/1-10V	INFINITO 12	1Z1120250	




Driver / Alimentatore				Not included
100-240V	48V/240W/IP67/1-10V	INFINITO 18	1Z1120390	




Driver / Alimentatore				Not included
100-240V	24V/120W/IP67/1-10V	INFINITO 5 TW / INFINITO 10 TW	1Z1120240	

Compulsory accessories / Accessori obbligatori



Controller			Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	INFINITO 6 / INFINITO 12 / 1Z2170010 INFINITO 18	




Controller Casambi - Tunable White			Not included
		INFINITO 5 TW / INFINITO 10 TW	1Z2360010

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



Spacer / Distanziale				Not included
Matt White	For driver kit with plug	INFINITO 6 / INFINITO 12	1A4930300.00.00	
Matt Black	For driver kit with plug	INFINITO 6 / INFINITO 12	1A4930400.00.00	



Ceiling installation kit / Kit d'installazione da soffitto			Not included
Matt White			1A0080300.00.00
Matt Black			1A0080400.00.00



Kit wall connection vertical sloped 45° / Kit attacco da parete per inclinazione verticale 45°			Not included
Matt White			1A0120300.00.00
Matt Black			1A0120400.00.00




Kit wall connection sloped right 75° / Kit attacco da parete per inclinazione 75° destro			Not included
Matt White			1A0340300.00.00
Matt Black			1A0340400.00.00




Kit wall connection sloped left 75° / Kit attacco da parete per inclinazione 75° sinistro			Not included
Matt White			1A0350300.00.00
Matt Black			1A0350400.00.00



Swallows / Rondini			Not included
Matt Black			1A0290400.00.00

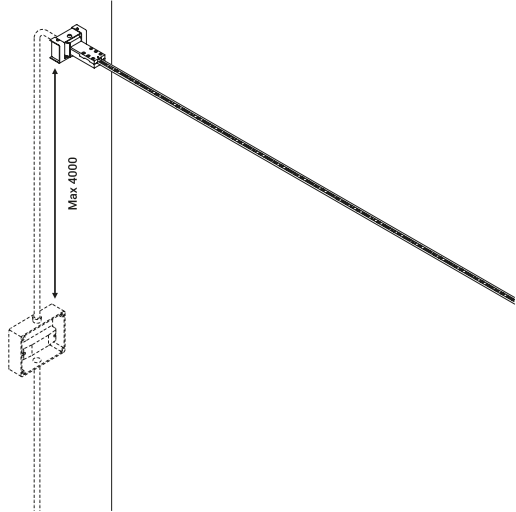


Example of installation with remote driver

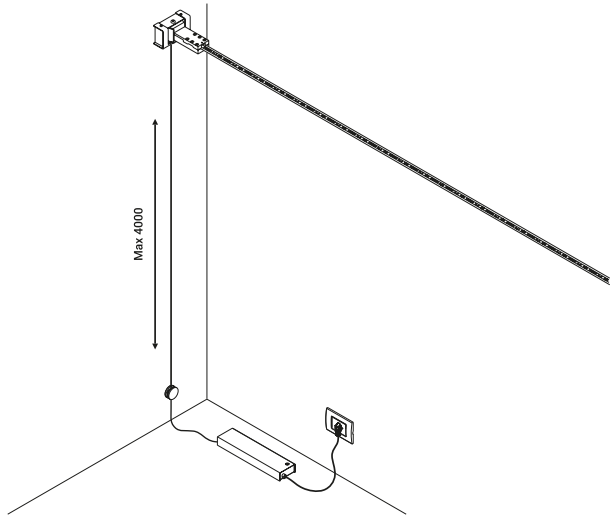


Example of installation with driver with plug




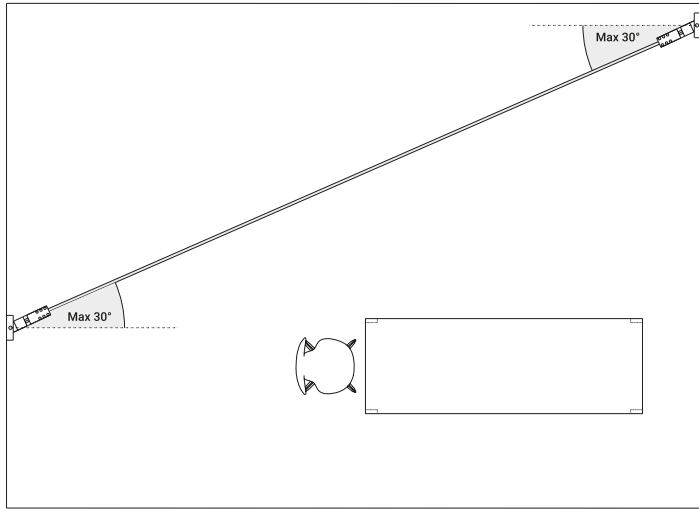


Example of installation with max rotation 30°

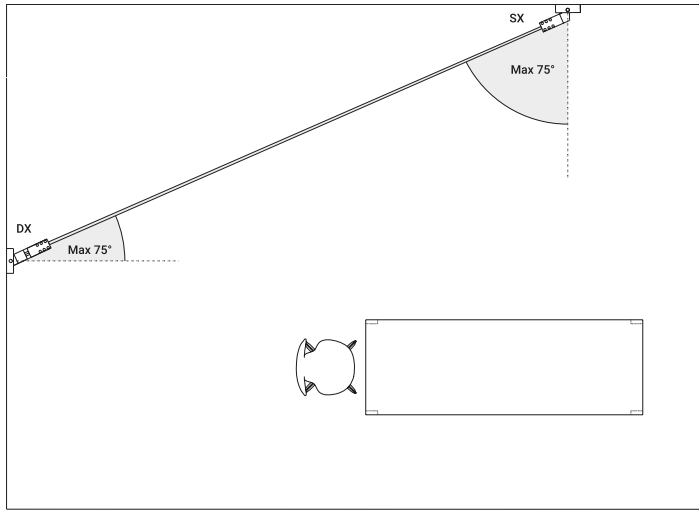


1A0340400.00.00 - 1A0350400.00.00 - Example of installation with kit wall connection sloped 75°

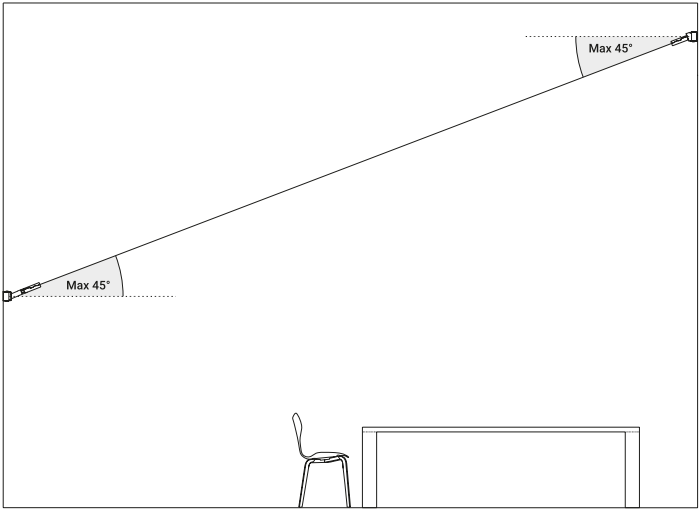

1A0120400.00.00 - Example of installation with kit wall connection vertical sloped 45°


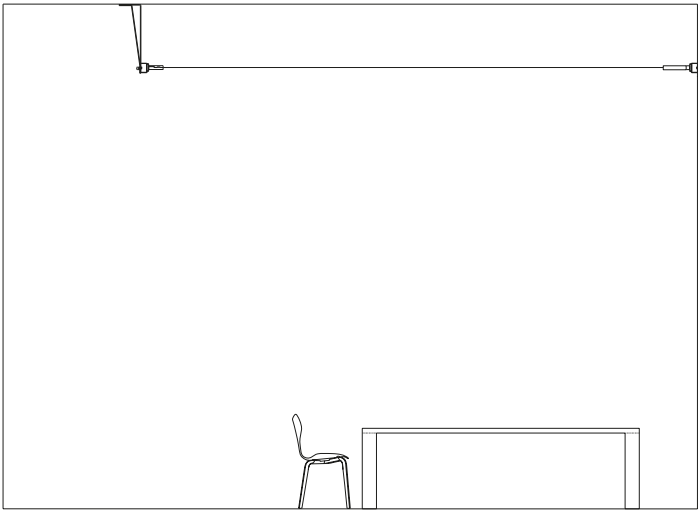


1A0080400.00.00 - Example of installation with ceiling installation kit

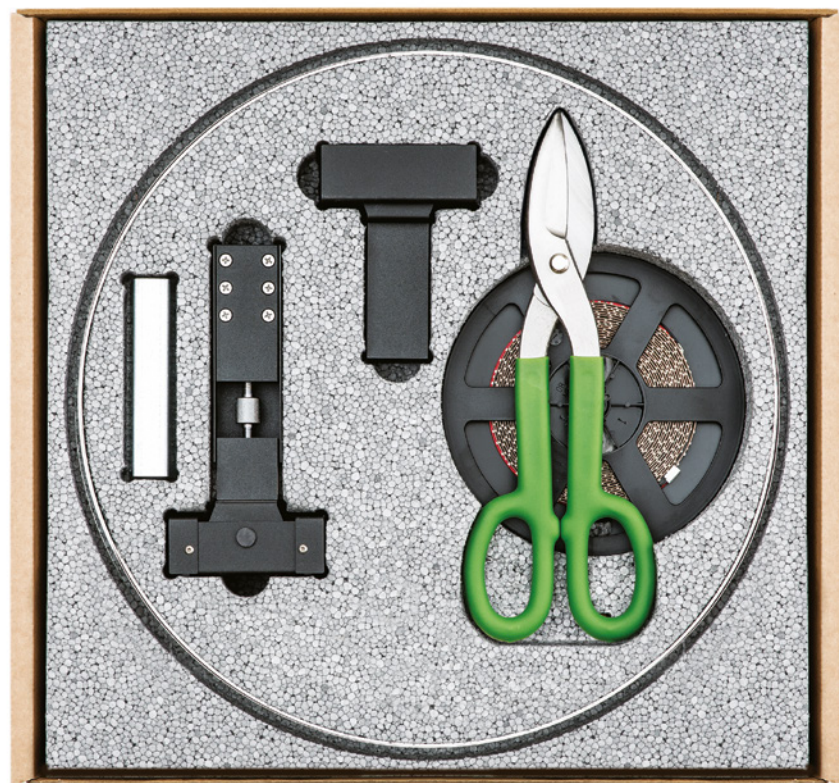









Light runs on a wire. An almost imperceptible wire, suspended in space.

Like a tightrope walker on a thin rope,
the light reaches everywhere, weightless and wonderful.

Ohm is an electro mechanic project that takes maximum advantage
of the characteristics of luminous diodes.

Its secret is a special unipolar wire stretched from wall to wall.

Where the light comes from is discreetly hidden,
giving all the attention to what it is illuminating.

It is possible to replace the light source even with the luminaire assembled.

Luminaire designed also to be powered by ENDLESS conductive tape.

Selection for ADI Design Index 2020

La luce corre sul filo. Un filo quasi impercettibile, sospeso nello spazio.

Come un funambolo su una corda sottilissima,
la luce arriva ovunque, con leggerezza ed emozione.

Ohm è un progetto elettromeccanico,
che sfrutta al massimo le caratteristiche dei diodi luminosi.

Il segreto è uno speciale cavo unipolare tirato da parete a parete.


La fonte quasi si nasconde, impalpabile e discreta,
regalando la scena al soggetto illuminato.

È possibile sostituire l'ottica anche ad apparecchio montato.


Apparecchio illuminante alimentabile anche con il tape conduttivo ENDLESS.

Selezione per ADI Design Index 2020

Remote driver version

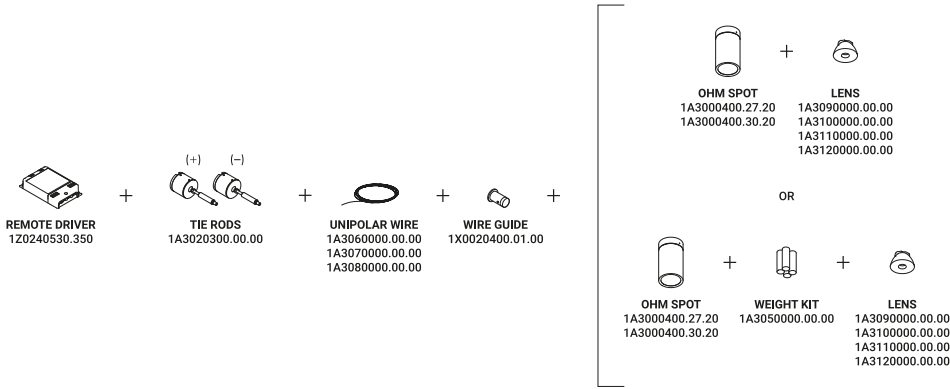

Wall/ceiling driver version

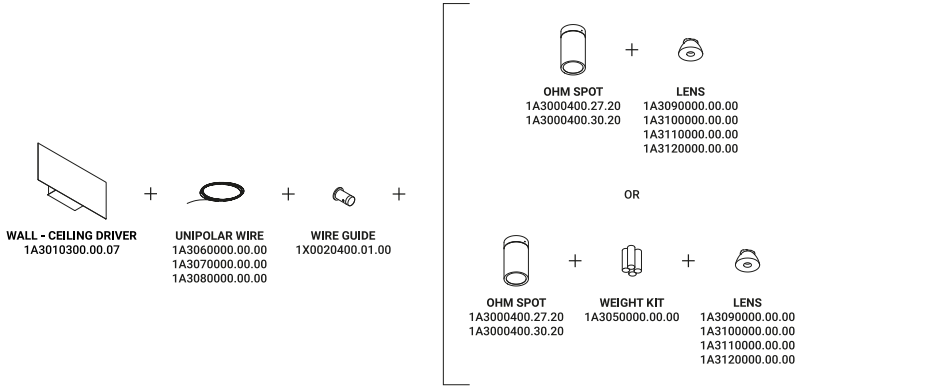


Systems / Direct / Indoor

Material Metal - PA
Finish .04 Matt Black

Note Special unipolar wire stretched from wall to wall. Max 4 Spots. Possibility for the luminaire to be powered by ENDLESS conductive tape and by dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS.

Speciale cavo unipolare teso da parete a parete. Max 4 Spot. Alimentabile anche con il tape conduttivo ENDLESS e tensione/corrente dedicata (Max 48V DC - Max 150W - Max 4A). Vedi pagina ENDLESS.



OHM SPOT
3,2W
Max 350mA DC
2700K / 3000K
CRI >95
Driver not included




Matt Black - 2700K
Matt Black - 3000K

1A3000400.27.20
1A3000400.30.20

Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione



Tie rods / Tiranti			Not included
Matt White	2 Pieces	1A3020300.00.00	




Unipolar wire - 12 m / Cavo unipolare - 12 m			Not included
	Max 60V DC	1A3060000.00.00	


Unipolar wire - 24 m / Cavo unipolare - 24 m			Not included
	Max 60V DC	1A3070000.00.00	

Unipolar wire - 48 m / Cavo unipolare - 48 m			Not included
	Max 60V DC	1A3080000.00.00	

Drivers / Alimentatori



Driver / Alimentatore			Not included
220-240V(100-127V)	350mA/18W(18W)/IP20/DALI - PUSH - 1-10V	1Z0240530.350	



Wall/ceiling driver / Alimentatore da parete/soffitto			Not included
Matt White	Input 100-240V - 50/60Hz Output 350mA - 18,5W - IP20 DALI - PUSH - 1-10V	1A3010300.00.07	


Other accessories / Altri accessori



Lens / Lente				Not included
Beam - 14°	2700K - CRI >95 - 272lm	OHM SPOT	1A3090000.00.00	
	3000K - CRI >95 - 288lm			
Beam - 24°	2700K - CRI >95 - 271lm	OHM SPOT	1A3100000.00.00	
	3000K - CRI >95 - 286lm			
Beam - 36°	2700K - CRI >95 - 257lm	OHM SPOT	1A3110000.00.00	
	3000K - CRI >95 - 273lm			
Beam - 50°	2700K - CRI >95 - 254lm	OHM SPOT	1A3120000.00.00	
	3000K - CRI >95 - 270lm			

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



Wall adapter plate / Piastra parete			Not included
Matt White	For mounting on brick masonry walls	1A3030300.00.00	




Wire guide / Guidacavo			Not included
Matt Black	1 Piece	1X0020400.01.00	




Weight kit for suspension version / Kit pesi per versione a sospensione			Not included
	4 Pieces	1A3050000.00.00	




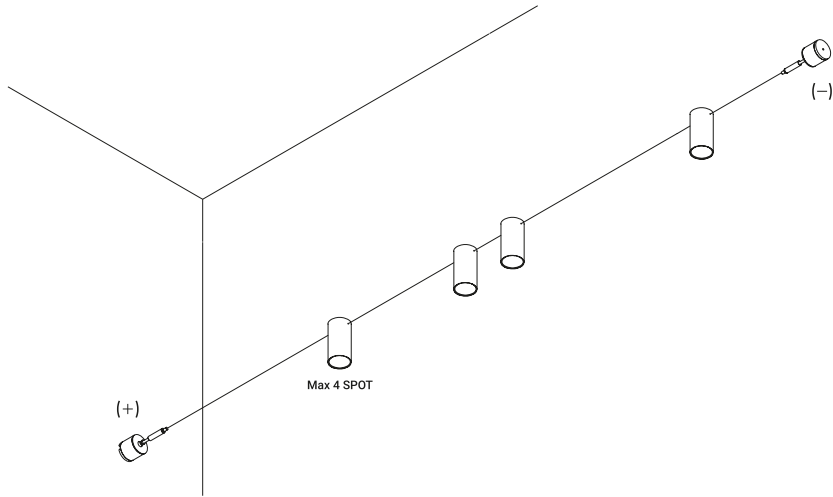

Remote driver version

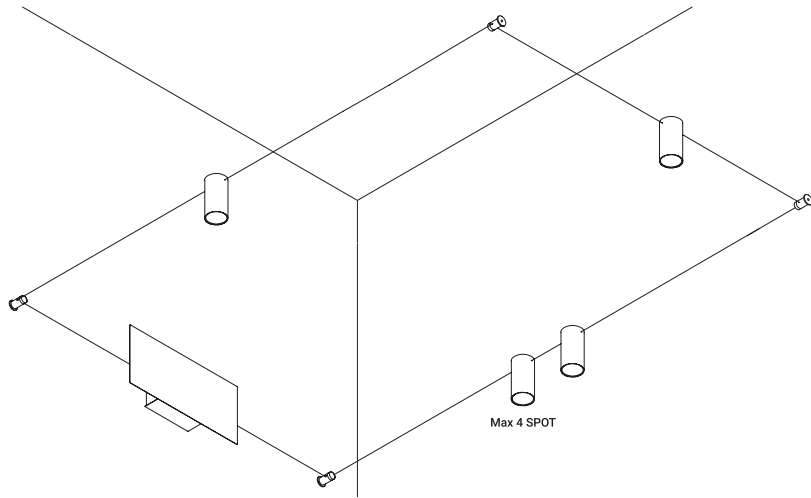

Wall/ceiling driver version

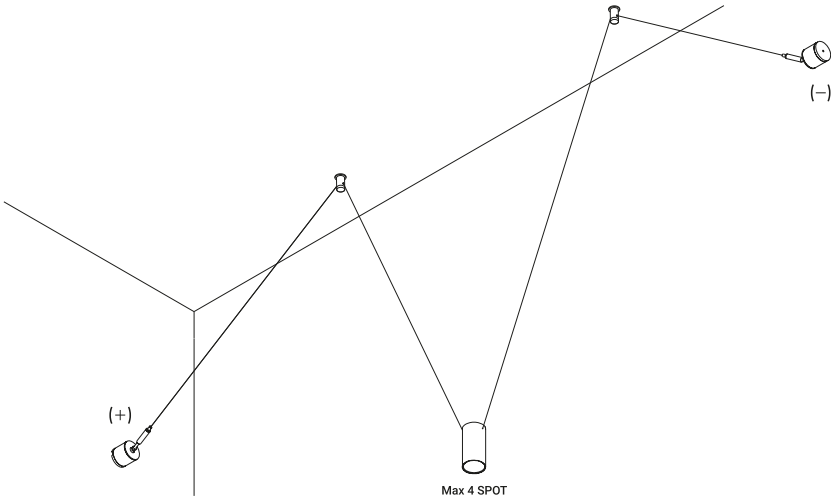

Suspension version



Metamorphosis Gallery Wunderkammer
Mantova



Private Residence
Berlin






UTOPIA

Davide Groppi / 2023


Utopia is a project on the limit state of light,
the research for the minimum dimension necessary
for pure and essential lighting.
It represents full flexibility, in both its design and its light control.
The light strip reaches into space, bending and drawing abstract, mysterious patterns.
Luminaire designed also to be powered by ENDLESS conductive tape.

Utopia è un progetto sullo stato limite della luce,
alla ricerca della dimensione minima necessaria
per illuminare in modo puro ed essenziale.
Rappresenta la massima flessibilità,
sia nel disegno della linea che nella gestione della luce.
Il nastro luminoso si tende nello spazio, piegandosi, disegnando grafi astratti e misteriosi.
Apparecchio illuminante alimentabile anche con il tape conduttivo ENDLESS.


Linear version -
UTOPIA 6

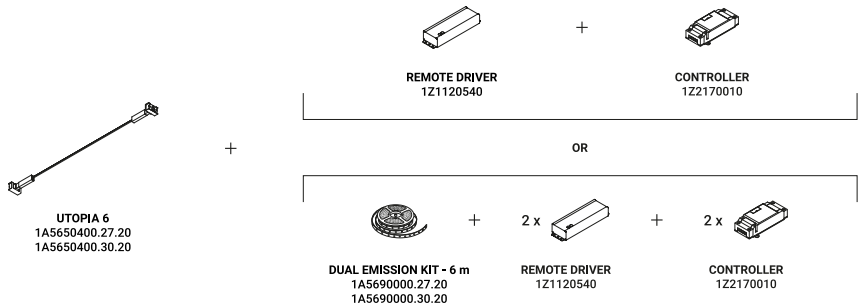

Linear version -
UTOPIA 12

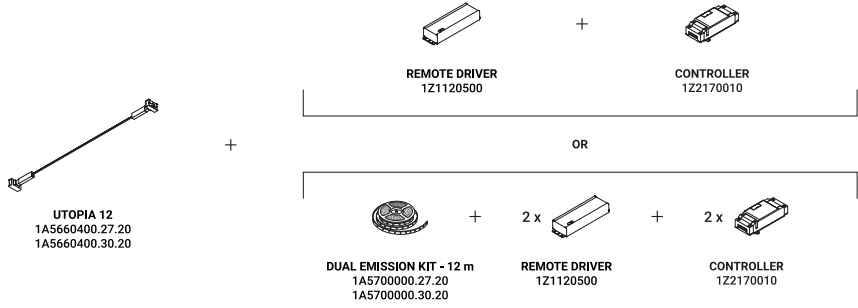

Bent version

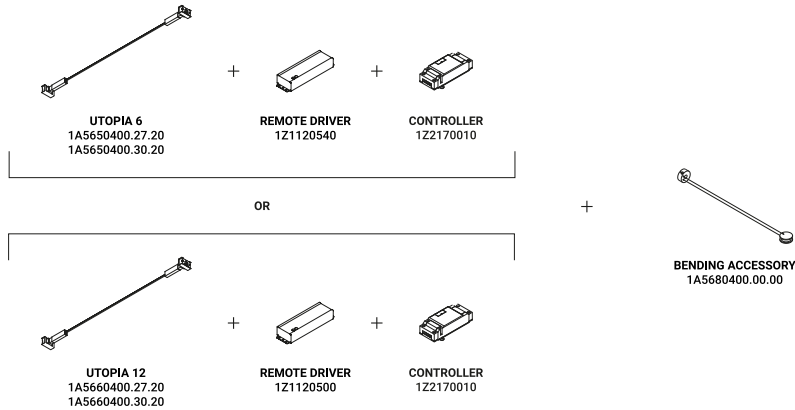


Systems / Indirect / Indoor

Material Metal
Finish .04 Matt Black

Note Special stainless steel profile stretched from wall to wall, only 3 mm thick. Available in 6 / 12 m with a single power unit and uniform lighting. Possibility to bend the profile in the space. Recommended installation height is 2,3 m from the floor. Possibility for the luminaire to be powered by ENDLESS conductive tape and by dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS.


Speciale profilo in acciaio inox teso da parete a parete di soli 3 mm di spessore. Disponibile da 6 / 12 m con un'unica alimentazione e illuminamento uniforme. Possibilità di piegare il profilo nello spazio. Altezza di installazione consigliata superiore a 2,3 m dal pavimento. Alimentabile anche con il tape conduttivo ENDLESS e tensione/corrente dedicata (Max 48V DC - Max 150W - Max 4A). Vedi pagina ENDLESS.



UTOPIA 6
72W
24V DC
2700K - 6084lm / 3000K - 6342lm
CRI >90
Driver not included
CE IP20 ENEC

Matt Black - 2700K
Matt Black - 3000K

1A5650400.27.20
1A5650400.30.20




UTOPIA 12
144W
24V DC
2700K - 12168lm / 3000K - 12684lm
CRI >90
Driver not included
CE IP20 ENEC

Matt Black - 2700K
Matt Black - 3000K


1A5660400.27.20
1A5660400.30.20

Compulsory accessories / Accessori obbligatori


Drivers / Alimentatori



Driver / Alimentatore				Not included
100-240V	24V/96W/IP67/1-10V	UTOPIA 6	1Z1120540	




Driver / Alimentatore				Not included
100-240V	24V/150W/IP67/1-10V	UTOPIA 12	1Z1120500	



Controller			Not included
DALI - PUSH - 0/1-10V - TRIAC - IP20			1Z2170010

Optional accessories / Accessori opzionali


Installation kits / Kit d'installazione



Bending accessory / Accessorio di piega			Not included
Matt Black	Not for dual emission kits		1A5680400.00.00



Spacer / Distanziale			Not included
Matt Black			1A4930400.00.00



Ceiling installation kit / Kit d'installazione da soffitto			Not included
Matt White			1A0080300.00.00
Matt Black			1A0080400.00.00



Kit wall connection sloped right 75° / Kit attacco da parete per inclinazione 75° destro			Not included
Matt Black			1A5710400.00.00



Kit wall connection sloped left 75° / Kit attacco da parete per inclinazione 75° sinistro			Not included
Matt Black			1A5720400.00.00

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione






Kit 6 m for dual emission / Kit 6 m per doppia emissione				Not included
Standard	Input 24V DC - 72W - IP20 2700K - 6084lm - CRI >90 Not bendable	UTOPIA 6	1A5690000.27.20	


Standard	Input 24V DC - 72W - IP20 3000K - 6342lm - CRI >90 Not bendable	UTOPIA 6	1A5690000.30.20	
----------	---	----------	-----------------	--

Kit 12 m for dual emission / Kit 12 m per doppia emissione				Not included
Standard	Input 24V DC - 144W - IP20 2700K - 12168lm - CRI >90 Not bendable	UTOPIA 12	1A5700000.27.20	


Standard	Input 24V DC - 144W - IP20 3000K - 12684lm - CRI >90 Not bendable	UTOPIA 12	1A5700000.30.20	
----------	---	-----------	-----------------	--




Possibilities of strip LED installation for dual emission

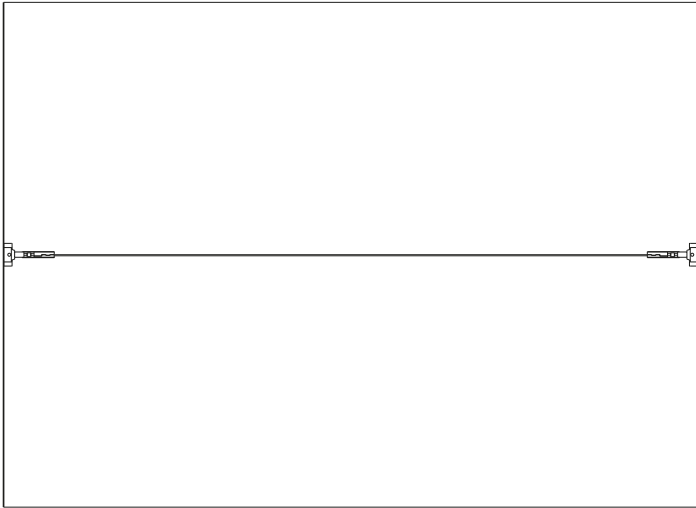


Example of linear installation

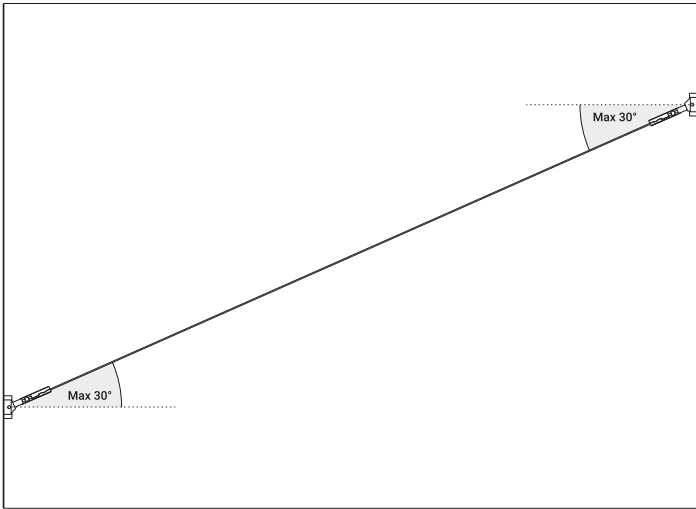


Example of installation with max rotation 30°

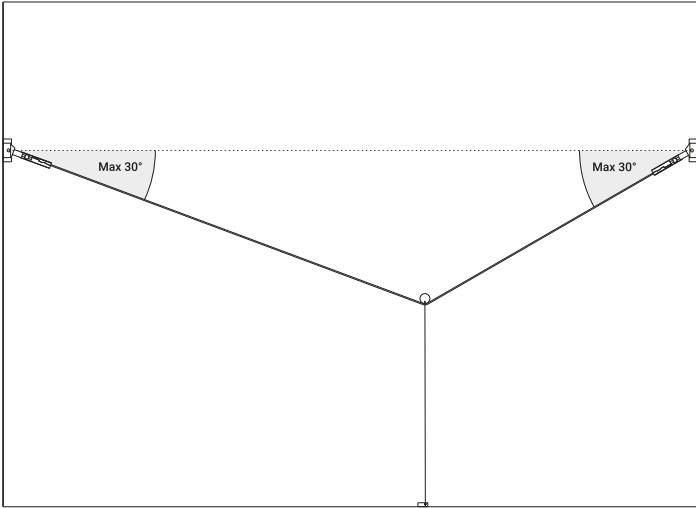


1A5680400.00.00 - Example of installation with bending accessory

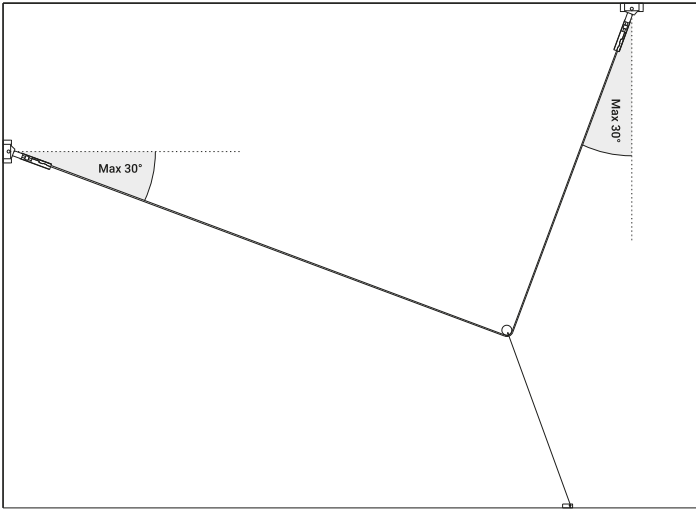


1A5680400.00.00 - Example of installation with bending accessory

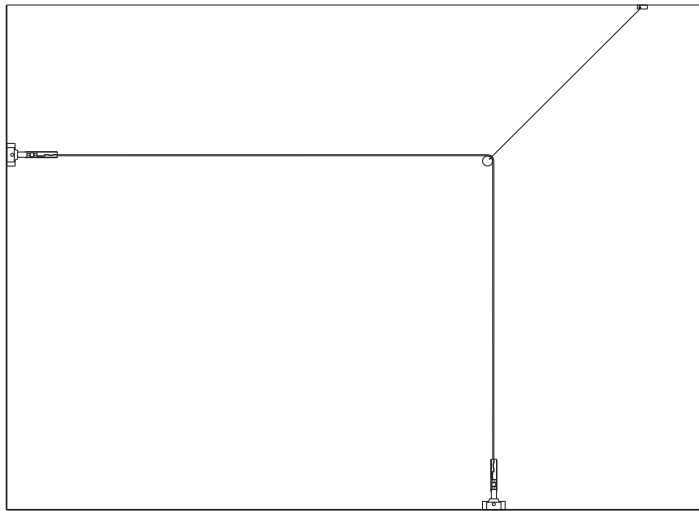

1A5680400.00.00 - Example of installation with bending accessory

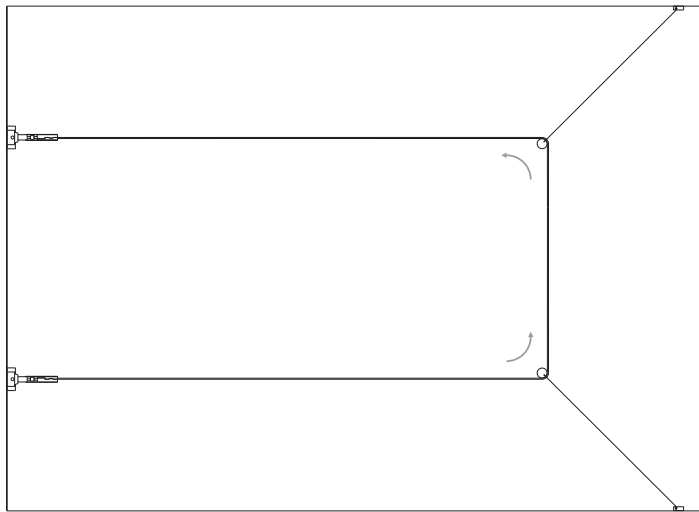

1A5680400.00.00 - Example of installation with bending accessory

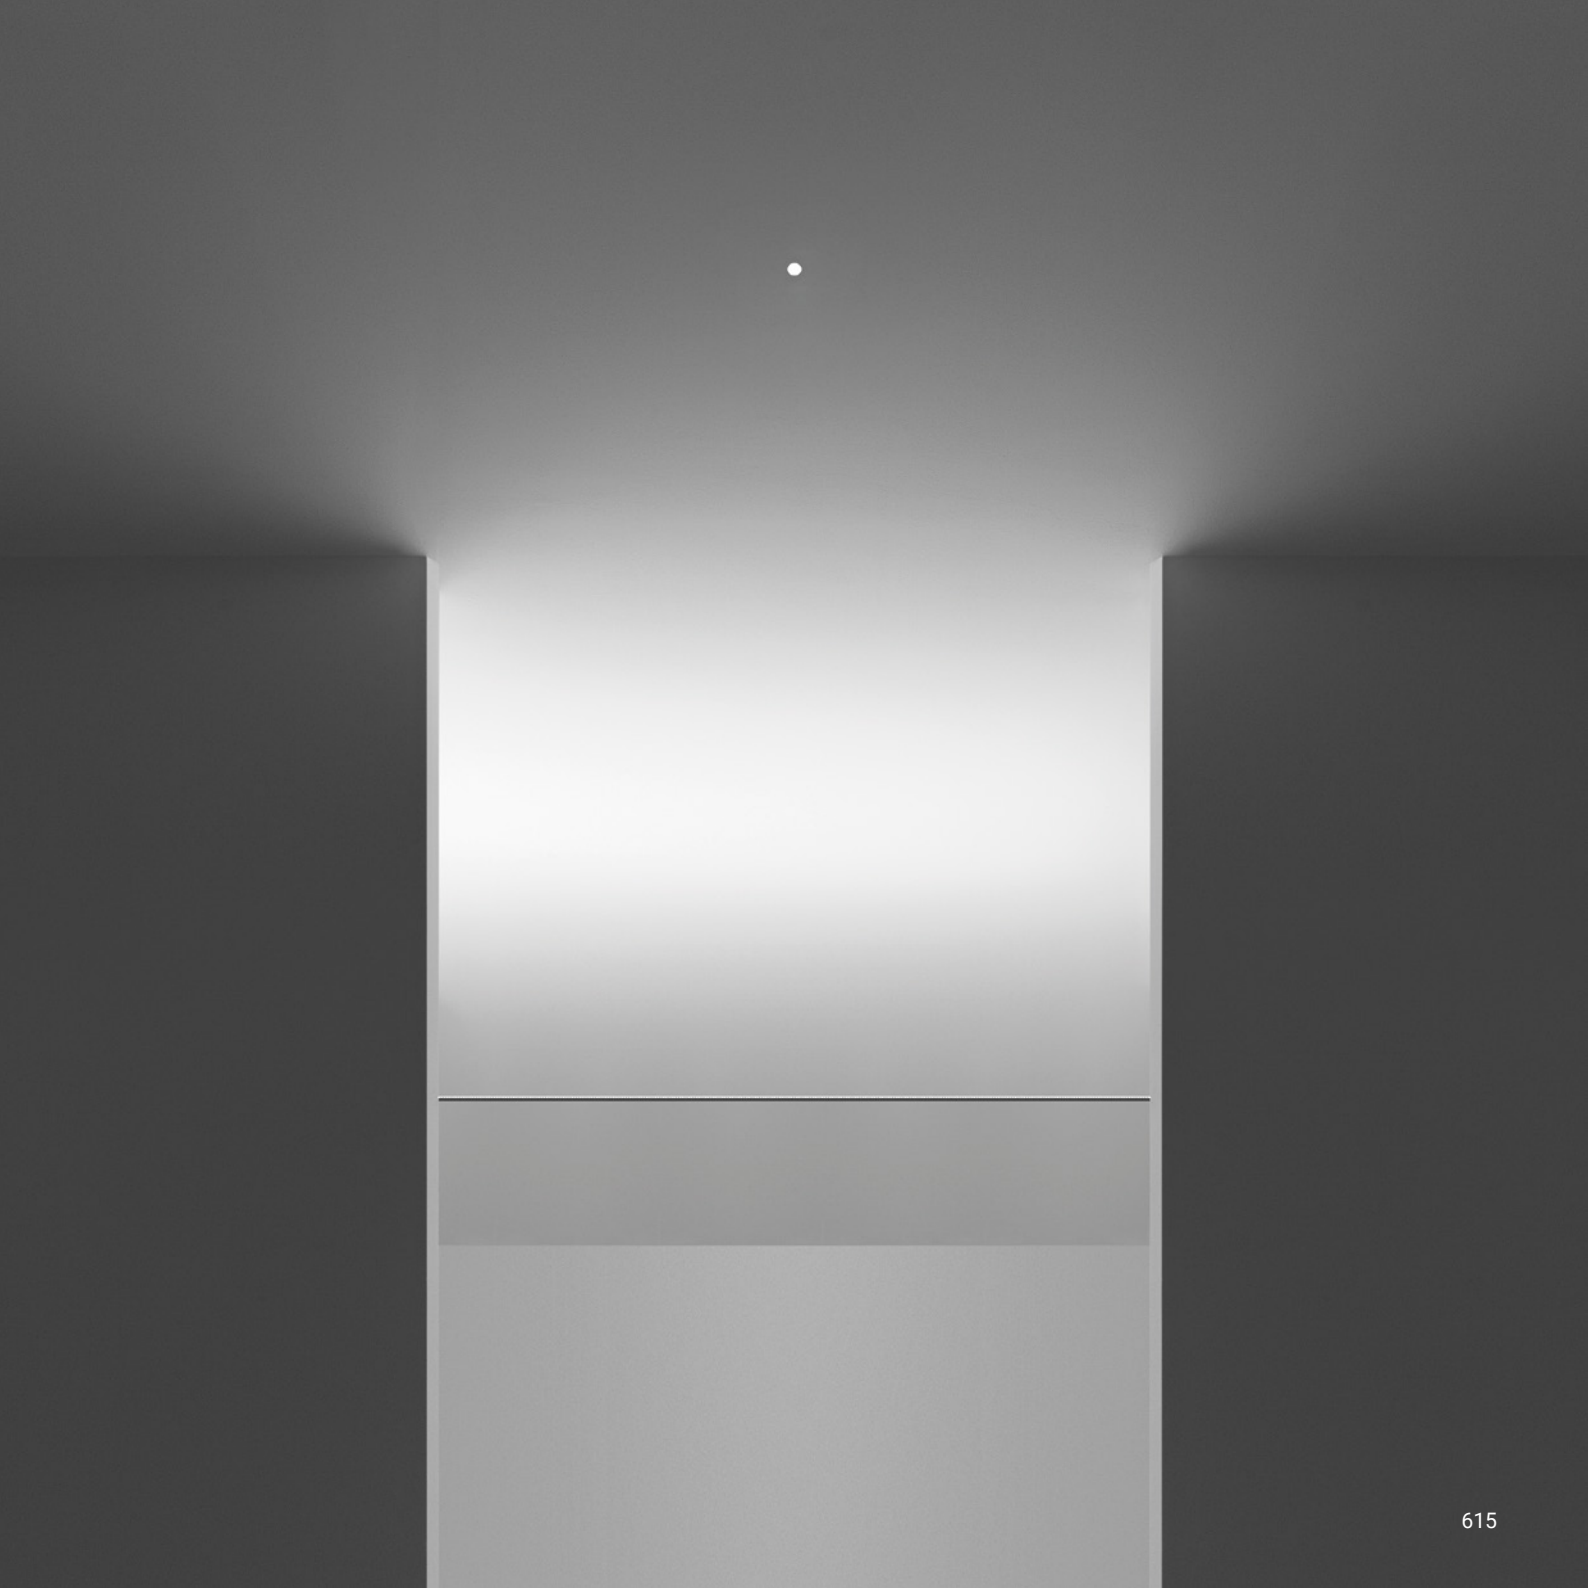



only 3 mm




BINARIO TRIFASE

/ 2007


Pure line in space.
Our track holds the models Dot, Mira and Spot.

Linea pura nello spazio.
Il nostro binario accoglie i modelli Dot, Mira e Spot.

Power right connector
and power left connector
installation

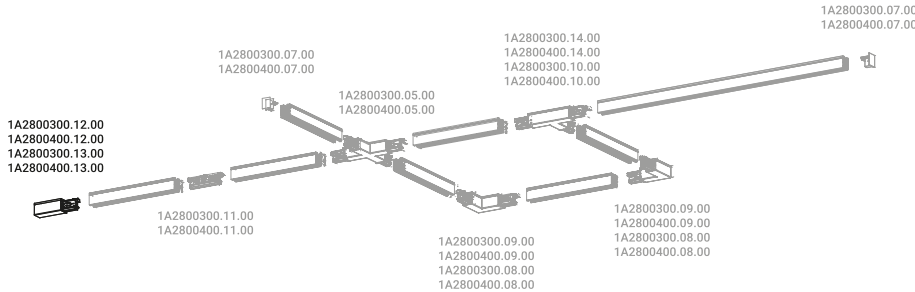

Power intermediate
connector installation

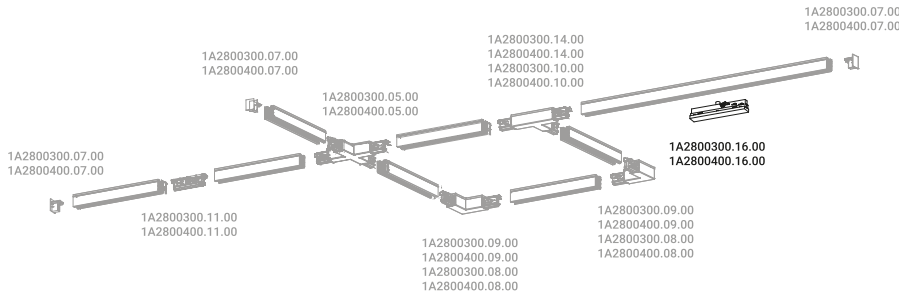


Tracks and profiles-Ceiling-Wall / Direct / Indoor

Material	Metal - Polycarbonate			
Finish	.03 Matt White	.04 Matt Black	.39 Matt White/Polished Gold	.49 Matt Black/Polished Gold

Note Ceiling and wall track system. Sistema a binario da soffitto e parete.

Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione



Track 1 m / Binario 1 m	Not included
Matt White	1A2800300.01.00
Matt Black	1A2800400.01.00

Track 2 m / Binario 2 m	Not included
Matt White	1A2800300.02.00
Matt Black	1A2800400.02.00

Track 3 m / Binario 3 m	Not included
Matt White	1A2800300.03.00
Matt Black	1A2800400.03.00

End cap / Tappo di chiusura	Not included
Matt White	1A2800300.07.00
Matt Black	1A2800400.07.00



Connectors / Connettori



Power right connector / Elemento di alimentazione destro	Not included
Matt White	1A2800300.13.00
Matt Black	1A2800400.13.00




Power left connector / Elemento di alimentazione sinistro	Not included
Matt White	1A2800300.12.00
Matt Black	1A2800400.12.00



Power intermediate connector / Elemento di alimentazione intermedio	Not included
Matt White	1A2800300.16.00
Matt Black	1A2800400.16.00

Optional accessories / Accessori opzionali


Installation kits / Kit d'installazione

	Linear jointing connector / Connettore lineare passante		Not included
	Matt White	1A2800300.11.00	
	Matt Black	1A2800400.11.00	
	Linear insulating connector / Connettore lineare isolante		Not included
	Matt White	1A2800300.19.00	
	Matt Black	1A2800400.19.00	
	Internal L connector / Connettore L interno		Not included
	Matt White	1A2800300.09.00	
	Matt Black	1A2800400.09.00	
	External L connector / Connettore L esterno		Not included
	Matt White	1A2800300.08.00	
	Matt Black	1A2800400.08.00	
	Right T connector / Connettore T destro		Not included
	Matt White	1A2800300.14.00	
	Matt Black	1A2800400.14.00	
	Left T connector / Connettore T sinistro		Not included
	Matt White	1A2800300.10.00	
	Matt Black	1A2800400.10.00	
	X connector / Connettore X		Not included
	Matt White	1A2800300.15.00	
	Matt Black	1A2800400.15.00	
	Adjustable suspension cable / Cavo di sospensione regolabile		Not included
	Length 1500 mm	1A2800000.04.00	
	Length 3000 mm	1A2800000.05.00	
	Length 5000 mm	1A2800000.06.00	
	Cutting tool / Tronchese per taglio		Not included
		1A2800000.17.00	




Compulsory accessories / Accessori obbligatori

Luminaires / Corpi illuminanti




DOT BINARIO
13W
220-240V - 50/60Hz
2700K / 3000K
CRI >97
Driver integrated
DALI
CE IP20

Matt White - 2700K - DALI	1A2290300.27.01
Matt White - 3000K - DALI	1A2290300.30.01
Matt Black - 2700K - DALI	1A2290400.27.01
Matt Black - 3000K - DALI	1A2290400.30.01
Matt White/Polished Gold - 2700K - DALI	1A2293900.27.01
Matt White/Polished Gold - 3000K - DALI	1A2293900.30.01
Matt Black/Polished Gold - 2700K - DALI	1A2294900.27.01
Matt Black/Polished Gold - 3000K - DALI	1A2294900.30.01




DOT BINARIO 51
Max 10W
100-240V - 50/60Hz
ON/OFF
Bulb not included
CE IP20

Matt White - ON/OFF	1A3710300.00.00
Matt Black - ON/OFF	1A3710400.00.00
Matt White/Polished Gold - ON/OFF	1A3713900.00.00
Matt Black/Polished Gold - ON/OFF	1A3714900.00.00



MIRA BINARIO
8W
220-240V - 50/60Hz
2700K - 327lm / 3000K - 352lm
CRI >90
Driver integrated
DALI
CE IP20

Matt White - 2700K - DALI	1A0490300.27.01
Matt White - 3000K - DALI	1A0490300.30.01
Matt Black - 2700K - DALI	1A0490400.27.01
Matt Black - 3000K - DALI	1A0490400.30.01
Matt White/Polished Gold - 2700K - DALI	1A0493900.27.01
Matt White/Polished Gold - 3000K - DALI	1A0493900.30.01
Matt Black/Polished Gold - 2700K - DALI	1A0494900.27.01
Matt Black/Polished Gold - 3000K - DALI	1A0494900.30.01



SPOT BINARIO
21W
220-240V - 50/60Hz
Driver integrated
DALI
LED Module not included
CE IP20




Matt White - DALI	1A0280300.00.01
Matt Black - DALI	1A0280400.00.01
Matt White/Polished Gold - DALI	1A0283900.00.01
Matt Black/Polished Gold - DALI	1A0284900.00.01

Compulsory accessories / Accessori obbligatori

Other accessories / Altri accessori






	Lens / Lente		Not included	
	Beam - 14°	2700K - CRI >97 - 983lm	DOT BINARIO	1A3090000.00.00
		3000K - CRI >97 - 1038lm		
	Beam - 24°	2700K - CRI >97 - 943lm	DOT BINARIO	1A3100000.00.00
		3000K - CRI >97 - 996lm		
	Beam - 36°	2700K - CRI >97 - 955lm	DOT BINARIO	1A3110000.00.00
		3000K - CRI >97 - 1005lm		
	Beam - 50°	2700K - CRI >97 - 965lm	DOT BINARIO	1A3120000.00.00
		3000K - CRI >97 - 1016lm		

LED modules / Moduli LED

	DG111 LED module / Modulo LED DG111		Not included	
	16,7W - 15° - 500mA DC	SPOT BINARIO	1A4700000.27.20	
	2700K - 1648lm - CRI >90			
	Energy Efficiency F - Dimmable			
	16,7W - 15° - 500mA DC		1A4700000.30.20	
	3000K - 1682lm - CRI >90			
	Energy Efficiency F - Dimmable			
	DG111 LED module / Modulo LED DG111		Not included	
	16,7W - 22° - 500mA DC	SPOT BINARIO	1A3890000.27.20	
	2700K - 1859lm - CRI >90			
	Energy Efficiency F - Dimmable			
	16,7W - 22° - 500mA DC		1A3890000.30.20	
	3000K - 1943lm - CRI >90			
	Energy Efficiency F - Dimmable			
	DG111 LED module / Modulo LED DG111		Not included	
	16,7W - 36° - 500mA DC	SPOT BINARIO	1A3900000.27.20	
	2700K - 1795lm - CRI >90			
	Energy Efficiency F - Dimmable			
	16,7W - 36° - 500mA DC		1A3900000.30.20	
	3000K - 1890lm - CRI >90			
	Energy Efficiency F - Dimmable			

Optional accessories / Accessori opzionali

Other accessories / Altri accessori

	Accessory holder + Honeycomb louvre / Porta accessori + Frangiluce nido d'ape		Not included	
		DOT BINARIO	1X0080400.01.00	
	Elliptical filter / Filtro ellittico		Not included	
	Standard	Compulsory with 1X0080400.01.00	DOT BINARIO	1X0080000.02.00
	Blue filter / Filtro blu		Not included	
	Standard	Compulsory with 1X0080400.01.00	DOT BINARIO	1X0080000.03.00
	Red filter / Filtro rosso		Not included	
	Standard	Compulsory with 1X0080400.01.00	DOT BINARIO	1X0080000.04.00
	Yellow filter / Filtro giallo		Not included	
	Standard	Compulsory with 1X0080400.01.00	DOT BINARIO	1X0080000.05.00

Optional accessories / Accessori opzionali

Bulbs / Lampadine



LED - GU10 - PAR16				Not included
	220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	DOT BINARIO 51	1Y0330500	




LED SORAA - GU10 - MR16				Not included
	230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	DOT BINARIO 51	1Y1580210	




LED SORAA - GU10 - MR16				Not included
	230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	DOT BINARIO 51	1Y1580010	


Other accessories / Altri accessori



Darklight				Not included
	LED SORAA - GU10 - MR16	DOT BINARIO 51	1Y1580040	



25° beam filter / Filtro fascio 25°				Not included
	LED SORAA - GU10 - MR16	DOT BINARIO 51	1Y1580020	



36° beam filter / Filtro fascio 36°				Not included
	LED SORAA - GU10 - MR16	DOT BINARIO 51	1Y1580030	

Optional accessories / Accessori opzionali

Other accessories / Altri accessori



Accessory holder + Soft filter + Honeycomb louvre / Porta accessori + Filtro soft + Frangiluce nido d'ape			Not included
Matt Black	SPOT BINARIO	1X0070400.04.00	



Accessory holder + Elliptical filter / Porta accessori + Filtro ellittico			Not included
Matt Black	SPOT BINARIO	1X0070400.05.00	




Blue filter / Filtro blu			Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	SPOT BINARIO	1X0070000.06.00




Red filter / Filtro rosso			Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	SPOT BINARIO	1X0070000.07.00



Yellow filter / Filtro giallo			Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	SPOT BINARIO	1X0070000.08.00




Directional fins / Alette direzionali			Not included
Matt Black	SPOT BINARIO	1X0070400.01.00	



Cylindrical screen / Schermo cilindrico			Not included
Matt Black	SPOT BINARIO	1X0070400.02.00	



Cone 30° / Cono 30°			Not included
Matt Black	SPOT BINARIO	1X0070400.03.00	

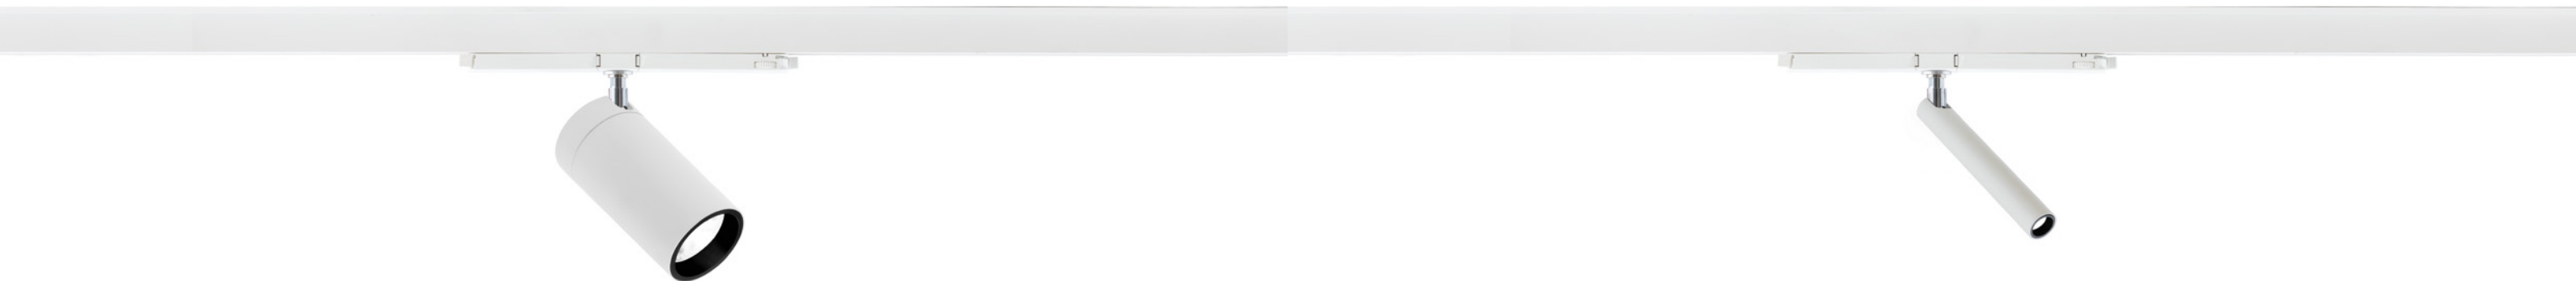







A minimal track system with tiny lights, small hummingbirds that perch where needed.
Luminaire designed also to be powered by ENDLESS system.

Un sistema a binario ridotto al minimo, con minuscoli corpi luminosi,
piccoli Colibrì che si posano dove necessario.
Apparecchio illuminante alimentabile anche con il sistema ENDLESS.

Layout example of wall and ceiling version

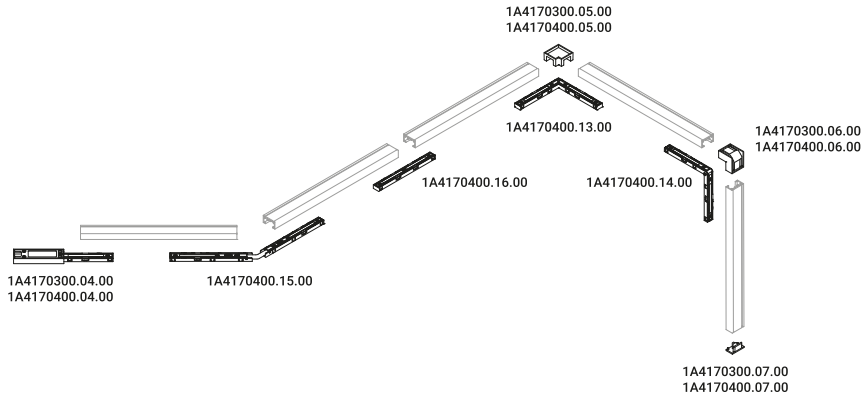

Layout example of recessed version

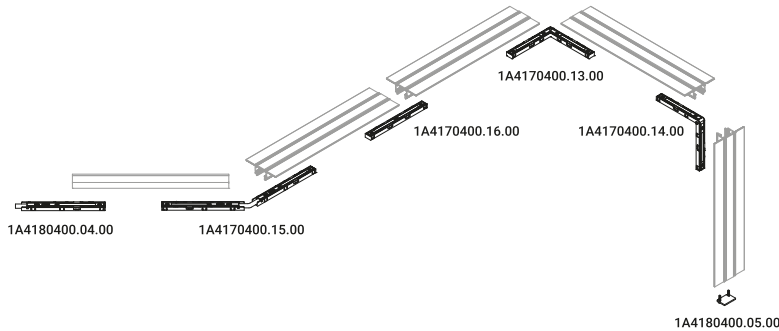

Tracks and profiles-Recessed-Wall-Ceiling / Direct / Indoor


Material Metal - Polycarbonate
Finish .04 Matt Black

Note Ceiling and wall track system operating at 48V DC. Possibility for the luminaire to be powered by ENDLESS system (Max 48V DC - Max 150W - Max 4A) and to be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.

Sistema a binario da soffitto e parete funzionante a 48V DC. Alimentabile anche con il sistema ENDLESS (Max 48V DC - Max 150W - Max 4A) ed utilizzabile, sullo stesso circuito, con i modelli ENDLESS. Vedi pagina ENDLESS.

Compulsory accessories / Accessori obbligatori


Installation kits for wall and ceiling track / Kit d'installazione per binario da parete e soffitto



Wall and ceiling track - 1 m / Binario da parete e soffitto - 1 m	Not included
Matt White	1A4170300.01.00
Matt Black	1A4170400.01.00

Wall and ceiling track - 2 m / Binario da parete e soffitto - 2 m	Not included
Matt White	1A4170300.02.00
Matt Black	1A4170400.02.00

Wall and ceiling track - 3 m / Binario da parete e soffitto - 3 m	Not included
Matt White	1A4170300.03.00
Matt Black	1A4170400.03.00




Power connector / Elemento di alimentazione	Not included
Matt White	1A4170300.04.00
Matt Black	1A4170400.04.00



End cap / Tappo di chiusura	Not included
Matt White	1A4170300.07.00
Matt Black	1A4170400.07.00

Compulsory accessories / Accessori obbligatori

Installation kits for recessed track / Kit d'installazione per binario da incasso



Recessed wall and ceiling track - 1 m / Binario da parete e soffitto da incasso - 1 m		Not included
Matt Black	1A4180400.01.00	



Recessed wall and ceiling track - 2 m / Binario da parete e soffitto da incasso - 2 m		Not included
Matt Black	1A4180400.02.00	




Recessed wall and ceiling track - 3 m / Binario da parete e soffitto da incasso - 3 m		Not included
Matt Black	1A4180400.03.00	


Power connector / Elemento di alimentazione		Not included
Matt Black	For recessed track	1A4180400.04.00

End cap / Tappo di chiusura		Not included
Matt Black	For recessed track	1A4180400.05.00

Drivers / Alimentatori



Driver with optoisolator / Alimentatore con optoisolatore		Not included
Input 100-240V - 50/60Hz Output 48V - 60W - IP20 - DALI		1A4170000.19.00



Driver with optoisolator / Alimentatore con optoisolatore		Not included
Input 100-240V - 50/60Hz Output 48V - 150W - IP20 - DALI		1A2810000.11.00





Optional accessories / Accessori opzionali

Installation kits for wall and ceiling track / Kit d'installazione per binario da parete e soffitto


	Corner joint cover H / Coprigiunto angolare H		Not included
	Matt White	For wall and ceiling track	1A4170300.05.00
	Matt Black	For wall and ceiling track	1A4170400.05.00

	Corner joint cover V / Coprigiunto angolare V		Not included
	Matt White	For wall and ceiling track	1A4170300.06.00
	Matt Black	For wall and ceiling track	1A4170400.06.00

	Cover - 3 m / Copertura - 3 m		Not included
	Matt White	For wall and ceiling track	1A4170300.08.00
	Matt Black	For wall and ceiling track	1A4170400.08.00


	Endless connector / Connettore Endless		Not included
	Standard	For wall and ceiling track	1A4170000.20.00


Installation kits for recessed track / Kit d'installazione per binario da incasso


	Cover - 3 m / Copertura - 3 m		Not included
	Matt White	For recessed track	1A4180300.08.00
	Matt Black	For recessed track	1A4180400.08.00

Optional accessories / Accessori opzionali


Installation kits / Kit d'installazione

	L connector / Connettore a L		Not included
	Matt Black		1A4170400.13.00


	Ceiling-wall connector / Connettore soffitto-parete		Not included
	Matt Black		1A4170400.14.00

	Flexible joint / Giunto flessibile		Not included
	Matt Black		1A4170400.15.00

	Linear connector / Connettore lineare		Not included
	Matt Black		1A4170400.16.00


	Locking tool / Strumento per bloccaggio		Not included
	Standard		1A4170000.17.00

Other accessories / Altri accessori

	Shelf / Mensola		Not included
	Matt Black	For wall and ceiling track	1A4170400.21.00

Compulsory accessories / Accessori obbligatori


Luminaires / Corpi illuminanti



COLIBRÌ 18 - 15°
2W
48V DC
2700K - 81lm / 3000K - 84lm
CRI >90
Beam 15°
Driver integrated
DALI
CE IP20 ENEC

Matt Black - 2700K - DALI
Matt Black - 3000K - DALI


1A4260400.27.01
1A4260400.30.01



COLIBRÌ 18 - 25°
2W
48V DC
2700K - 79lm / 3000K - 81lm
CRI >90
Beam 25°
Driver integrated
DALI
CE IP20 ENEC

Matt Black - 2700K - DALI
Matt Black - 3000K - DALI


1A4270400.27.01
1A4270400.30.01



COLIBRÌ 28 - 15°
4W
48V DC
2700K - 147lm / 3000K - 151lm
CRI >90
Beam 15°
Driver integrated
DALI
CE IP20 ENEC

Matt Black - 2700K - DALI
Matt Black - 3000K - DALI

1A4280400.27.01
1A4280400.30.01



COLIBRÌ 28 - 25°
5W
48V DC
2700K - 250lm / 3000K - 258lm
CRI >90
Beam 25°
Driver integrated
DALI
CE IP20 ENEC

Matt Black - 2700K - DALI
Matt Black - 3000K - DALI

1A4290400.27.01
1A4290400.30.01




Metamorphosis Gallery Wunderkammer
Mantova



Al Gatto Verde Restaurant
Modena






Plasterboard track for recessed installation.
It is designed for use with state-of-the-art LED modules
to create a wide range of light beams.

Binario per installazione da incasso per cartongesso.
Ideato per utilizzare moduli a LED di ultima generazione
ed avere un'ampia disponibilità di fasci luminosi.

Layout example

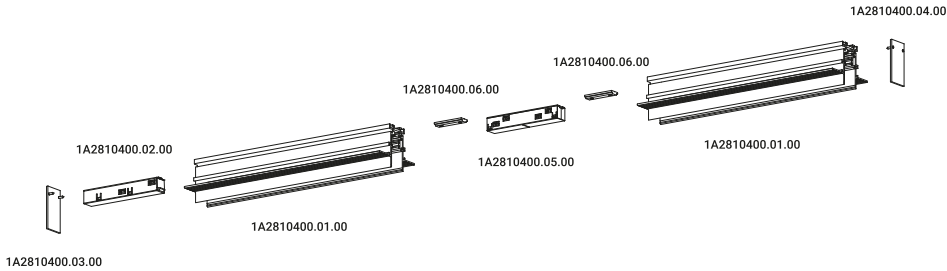


Tracks and profiles-Recessed / Direct / Indoor

Material	Metal - Polycarbonate		
Finish	.03 Matt White	.04 Matt Black	.49 Matt Black/Polished Gold
Note	Recessed track system operating at 48V DC.		Sistema a binario da incasso funzionante a 48V DC.

Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione



Plasterboard track 12,5 mm / Binario per cartongesso 12,5 mm		Not included
Matt Black	48V DC - Max 15A Length 2000 mm Cut-out 2000x26 mm	1A2810400.01.00



Power connector / Elemento di alimentazione		Not included
Matt Black	Output 48V - Max 15A	1A2810400.02.00




End cap for power connector / Tappo di chiusura per alimentazione		Not included
Matt Black		1A2810400.03.00




End cap / Tappo di chiusura		Not included
Matt Black		1A2810400.04.00

Compulsory accessories / Accessori obbligatori


Drivers / Alimentatori



Driver / Alimentatore		Not included
100-240V	48V/150W/IP67/1-10V	1Z1120250



Driver with optoisolator / Alimentatore con optoisolatore		Not included
Input 100-240V - 50/60Hz Output 48V - 150W - IP20 - DALI		1A2810000.11.00



Driver with optoisolator / Alimentatore con optoisolatore		Not included
Input 100-240V - 50/60Hz Output 48V - 320W - IP20 - DALI		1A2810000.12.00

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione




Linear connector / Connettore lineare		Not included
Matt Black	Output 48V - Max 15A	1A2810400.05.00



Reinforcing bracket / Staffa di rinforzo		Not included
Matt Black		1A2810400.06.00




Clamp with M6 grippe / Morsetto con pinza M6		Not included
		1A2810000.07.00



Suspension set / Set sospensione		Not included
		1A2810000.08.00




Plaster installation guard / Protezione per installazione cartongesso		Not included
Length 2000 mm		1A2810000.09.00



Cutting tool / Tronchese per taglio		Not included
		1A2800000.17.00

Compulsory accessories / Accessori obbligatori

Luminaires / Corpi illuminanti



DOT FRAMELESS

13W

48V DC

2700K / 3000K

CRI >97

Driver integrated

DALI



Matt White - 2700K - DALI

Matt White - 3000K - DALI

Matt Black - 2700K - DALI

Matt Black - 3000K - DALI

Matt Black/Polished Gold - 2700K - DALI

Matt Black/Polished Gold - 3000K - DALI

1A0090300.27.01

1A0090300.30.01

1A0090400.27.01

1A0090400.30.01

1A0094900.27.01

1A0094900.30.01


Other accessories / Altri accessori




Lens / Lente		Not included	
Beam - 14°	2700K - CRI >97 - 983lm	DOT FRAMELESS	1A3090000.00.00
	3000K - CRI >97 - 1038lm		
Beam - 24°	2700K - CRI >97 - 943lm	DOT FRAMELESS	1A3100000.00.00
	3000K - CRI >97 - 996lm		
Beam - 36°	2700K - CRI >97 - 955lm	DOT FRAMELESS	1A3110000.00.00
	3000K - CRI >97 - 1005lm		
Beam - 50°	2700K - CRI >97 - 965lm	DOT FRAMELESS	1A3120000.00.00
	3000K - CRI >97 - 1016lm		

Optional accessories / Accessori opzionali


Other accessories / Altri accessori




Accessory holder + Honeycomb louvre / Porta accessori + Frangiluce nido d'ape		Not included	
DOT FRAMELESS		1X0080400.01.00	




Elliptical filter / Filtro ellittico		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT FRAMELESS	1X0080000.02.00




Blue filter / Filtro blu		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT FRAMELESS	1X0080000.03.00



Red filter / Filtro rosso		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT FRAMELESS	1X0080000.04.00



Yellow filter / Filtro giallo		Not included	
Standard	Compulsory with 1X0080400.01.00	DOT FRAMELESS	1X0080000.05.00

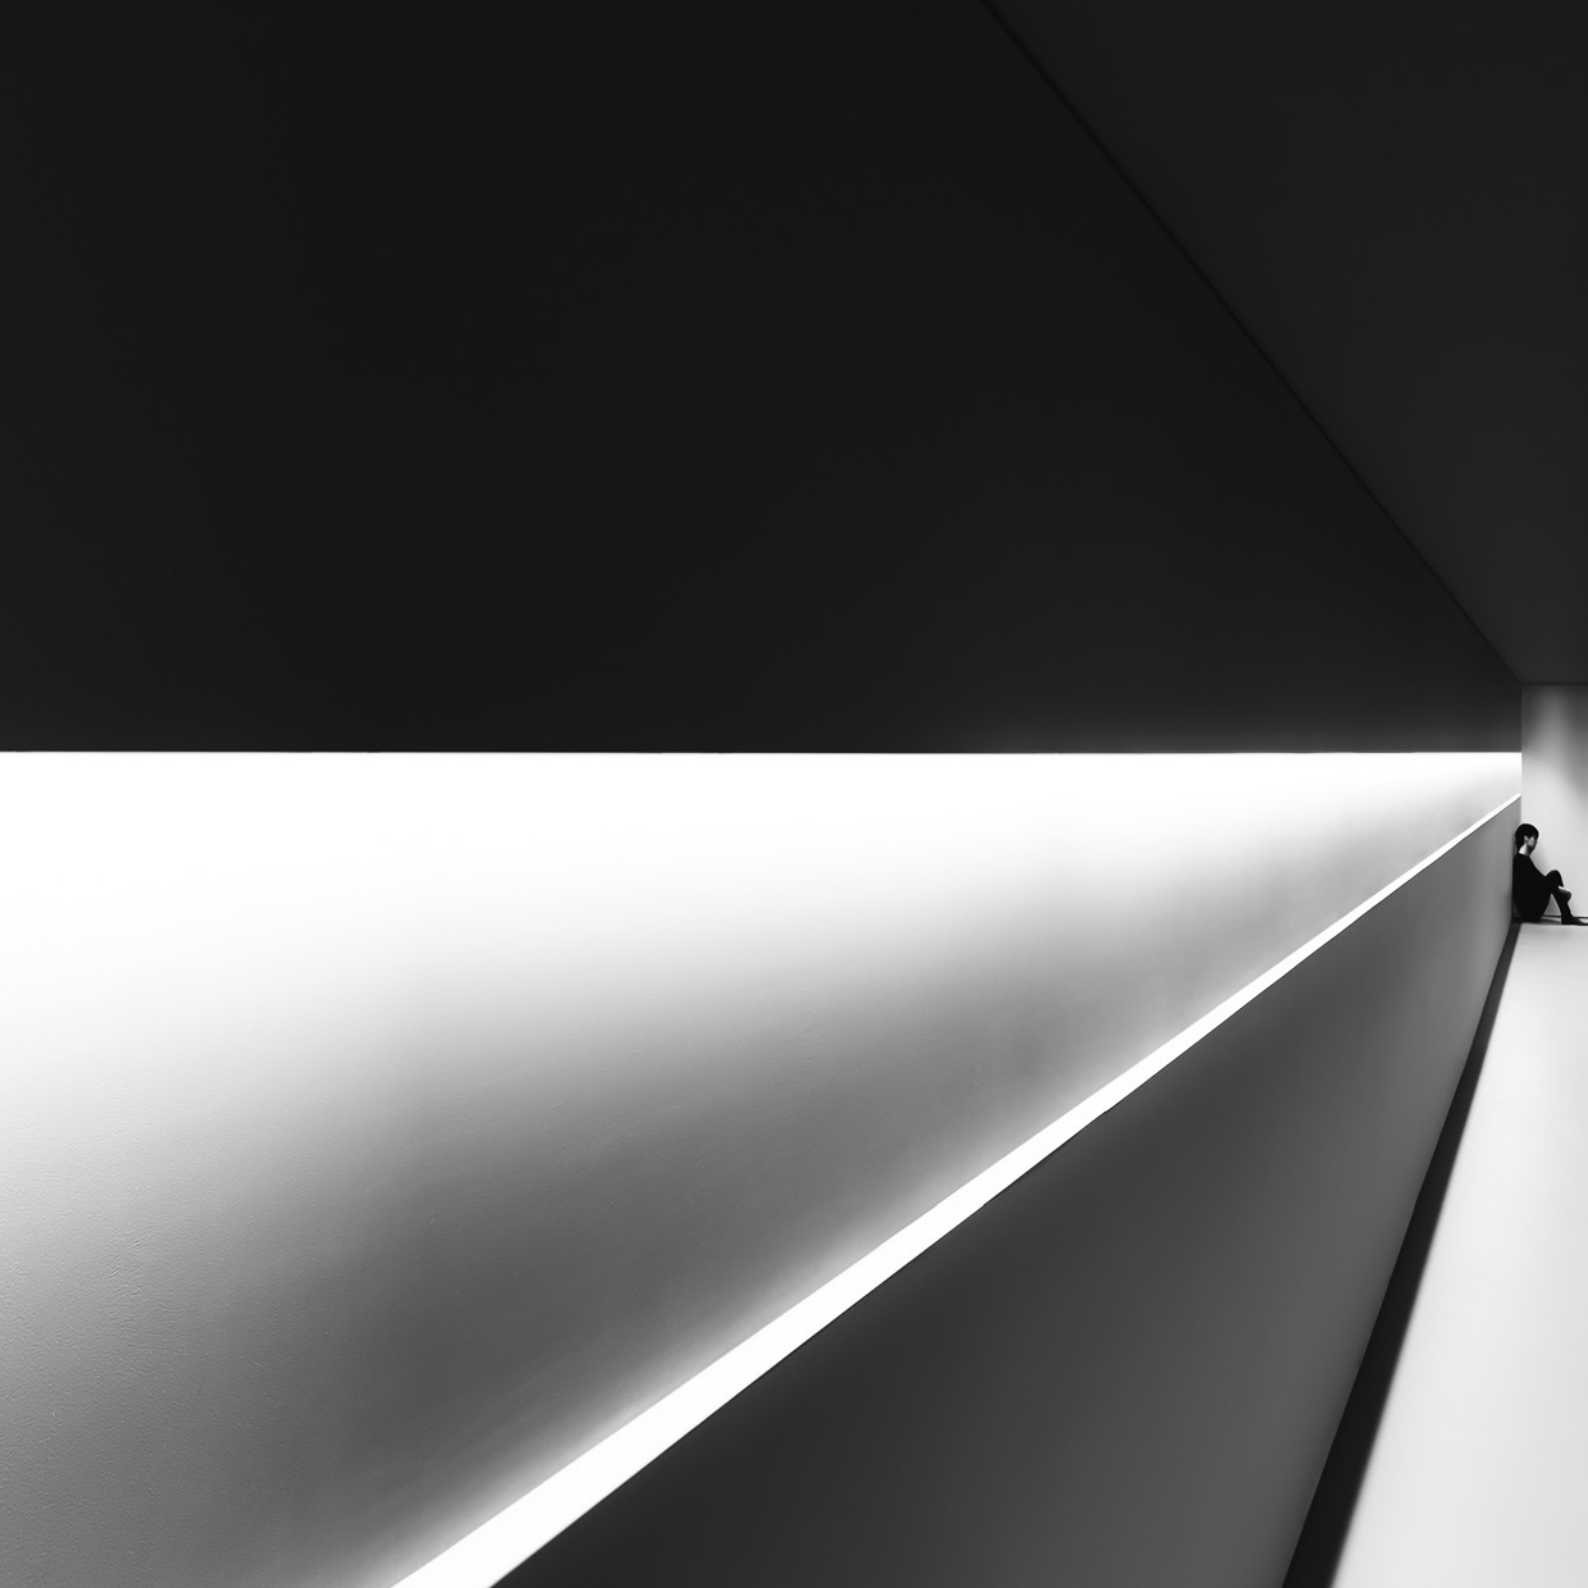


Profiles designed to create projects with continuous light.

Profili pensati per realizzare progetti di luce continua.

Tracks and profiles-Ceiling / Direct / Indoor		
Material	Metal	
Finish	.00 Standard	
Note	Profile with continuous light.	Profilo a luce continua.

Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione



Aluminium profile 2 m / Profilo in alluminio 2 m		Not included
Standard	With opal cover	1A4970000.01.00



Cap / Tappo		Not included
Standard		1A4970000.02.00



Fixing spring / Molla di fissaggio		Not included
Standard		1A4970000.03.00


Compulsory accessories / Accessori obbligatori

LED modules / Moduli LED




Strip LED - 5 m - IP20		Not included
Input 24V DC - 12,5W/m - IP20 2700K - 1240lm/m - CRI >94		1A5010000.27.20
Input 24V DC - 12,5W/m - IP20 3000K - 1380lm/m - CRI >94		1A5010000.30.20


Drivers / Alimentatori




Driver / Alimentatore		Not included
100-240V	24V/80W/IP20/ON/OFF	1Z1120440




Driver / Alimentatore		Not included
100-240V	24V/96W/IP67/1-10V	1Z1120540



Driver / Alimentatore		Not included
100-240V	24V/150W/IP67/1-10V	1Z1120500



Controller		Not included
DALI - PUSH - 0/1-10V - TRIAC - IP20		1Z2170010






Tracks and profiles-Ceiling / Direct / Indoor		
Material	Metal	
Finish	.00 Standard	
Note	Profile with continuous light.	Profilo a luce continua.

Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione



Aluminium profile 2 m / Profilo in alluminio 2 m		Not included
Standard	With opal cover	1A4970000.04.00



Cap / Tappo		Not included
Standard		1A4970000.05.00



Fixing spring / Molla di fissaggio		Not included
Standard		1A4970000.06.00


Compulsory accessories / Accessori obbligatori

LED modules / Moduli LED




Strip LED - 5 m - IP20		Not included
Input 24V DC - 12,5W/m - IP20 2700K - 1240lm/m - CRI >94		1A5010000.27.20
Input 24V DC - 12,5W/m - IP20 3000K - 1380lm/m - CRI >94		1A5010000.30.20


Drivers / Alimentatori




Driver / Alimentatore		Not included
100-240V	24V/80W/IP20/ON/OFF	1Z1120440




Driver / Alimentatore		Not included
100-240V	24V/96W/IP67/1-10V	1Z1120540



Driver / Alimentatore		Not included
100-240V	24V/150W/IP67/1-10V	1Z1120500





Controller		Not included
DALI - PUSH - 0/1-10V - TRIAC - IP20		1Z2170010

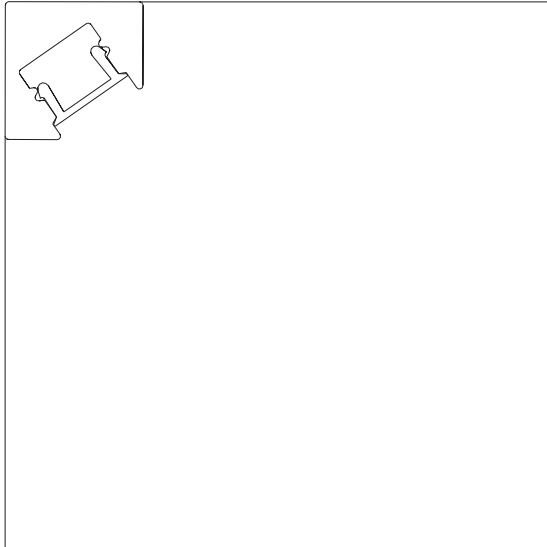









Tracks and profiles-Ceiling / Direct / Indoor		
Material	Metal	
Finish	.00 Standard	
Note	Profile with continuous light.	Profilo a luce continua.

Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione		
	Aluminium profile 2 m / Profilo in alluminio 2 m	Not included
	Standard	1A4970000.07.00
	Opal cover 2 m / Diffusore opale 2 m	Not included
	Standard	1A4970000.08.00
	Transparent cover 2 m / Diffusore trasparente 2 m	Not included
	Standard	1A4970000.09.00
	Satin cover 2 m / Diffusore satinato 2 m	Not included
	Standard	1A4970000.10.00
	Cap / Tappo	Not included
	Standard	1A4970000.11.00
	Adhesive 1 m / Adesivo 1 m	Not included
	Standard	1A4970000.12.00
	Adhesive magnet 1 m / Calamita adesiva 1 m	Not included
	Standard	1A4970000.13.00

Compulsory accessories / Accessori obbligatori

LED modules / Moduli LED		
	Strip LED - 5 m - IP20	Not included
	Input 24V DC - 12,5W/m - IP20 2700K - 1240lm/m - CRI >94	1A5010000.27.20
	Strip LED - 5 m - IP20	Not included
	Input 24V DC - 12,5W/m - IP20 3000K - 1380lm/m - CRI >94	1A5010000.30.20
	Strip LED - 5 m - IP20	Not included
	Input 24V DC - 14,4W/m - IP20 2700K - 1420lm/m - CRI >80	1A4980000.27.20
	Strip LED - 5 m - IP20	Not included
	Input 24V DC - 14,4W/m - IP20 3000K - 1575lm/m - CRI >80	1A4980000.30.20
	Strip LED - 5 m - IP65	Not included
	Input 24V DC - 19,2W/m - IP20 2700K - 2100lm/m - CRI >80	1A4990000.27.20
	Strip LED - 5 m - IP65	Not included
	Input 24V DC - 19,2W/m - IP20 3000K - 2340lm/m - CRI >80	1A4990000.30.20
Drivers / Alimentatori		
	Driver / Alimentatore	Not included
	100-240V 24V/80W/IP20/ON/OFF	1Z1120440
	Driver / Alimentatore	Not included
	100-240V 24V/96W/IP67/1-10V	1Z1120540
	Driver / Alimentatore	Not included
	100-240V 24V/150W/IP67/1-10V	1Z1120500
	Controller	Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z2170010





LIGHTLINE RECESSED

/ 2023

Recessed profiles designed to create projects with continuous light.

Profili da incasso pensati per realizzare progetti di luce continua.


Tracks and profiles-Recessed / Direct / Indoor

MaterialMetal
Finish.00 Standard


NoteRecessed profile with continuous light.Profilo da incasso a luce continua.

Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione



Aluminium profile 2 m / Profilo in alluminio 2 m	Not included
Standard	1A4970000.14.00



Opal cover 2 m / Diffusore opale 2 m	Not included
Standard	1A4970000.08.00



Transparent cover 2 m / Diffusore trasparente 2 m	Not included
Standard	1A4970000.09.00




Satin cover 2 m / Diffusore satinato 2 m	Not included
Standard	1A4970000.10.00



Cap / Tappo	Not included
Standard	1A4970000.15.00



Fixing spring / Molla di fissaggio	Not included
Standard	1A4970000.16.00



Formwork kit 2 m / Kit cassaforma 2 m	Not included
Standard	1A4970000.17.00

Compulsory accessories / Accessori obbligatori

LED modules / Moduli LED



Strip LED - 5 m - IP20	Not included
Input 24V DC - 12,5W/m - IP20 2700K - 1240lm/m - CRI >94	1A5010000.27.20
Input 24V DC - 12,5W/m - IP20 3000K - 1380lm/m - CRI >94	1A5010000.30.20



Strip LED - 5 m - IP20	Not included
Input 24V DC - 14,4W/m - IP20 2700K - 1420lm/m - CRI >80	1A4980000.27.20
Input 24V DC - 14,4W/m - IP20 3000K - 1575lm/m - CRI >80	1A4980000.30.20




Strip LED - 5 m - IP20	Not included
Input 24V DC - 19,2W/m - IP20 2700K - 2100lm/m - CRI >80	1A4990000.27.20
Input 24V DC - 19,2W/m - IP20 3000K - 2340lm/m - CRI >80	1A4990000.30.20




Strip LED - 5 m - IP65	Not included
Input 24V DC - 14,4W/m - IP65 2700K - 1420lm/m - CRI >82	1A5000000.27.20
Input 24V DC - 14,4W/m - IP65 3000K - 1575lm/m - CRI >82	1A5000000.30.20


Drivers / Alimentatori




Driver / Alimentatore	Not included
100-240V24V/80W/IP20/ON/OFF	1Z1120440





Driver / Alimentatore	Not included
100-240V24V/96W/IP67/1-10V	1Z1120540



Driver / Alimentatore	Not included
100-240V24V/150W/IP67/1-10V	1Z1120500




Controller	Not included
DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z2170010




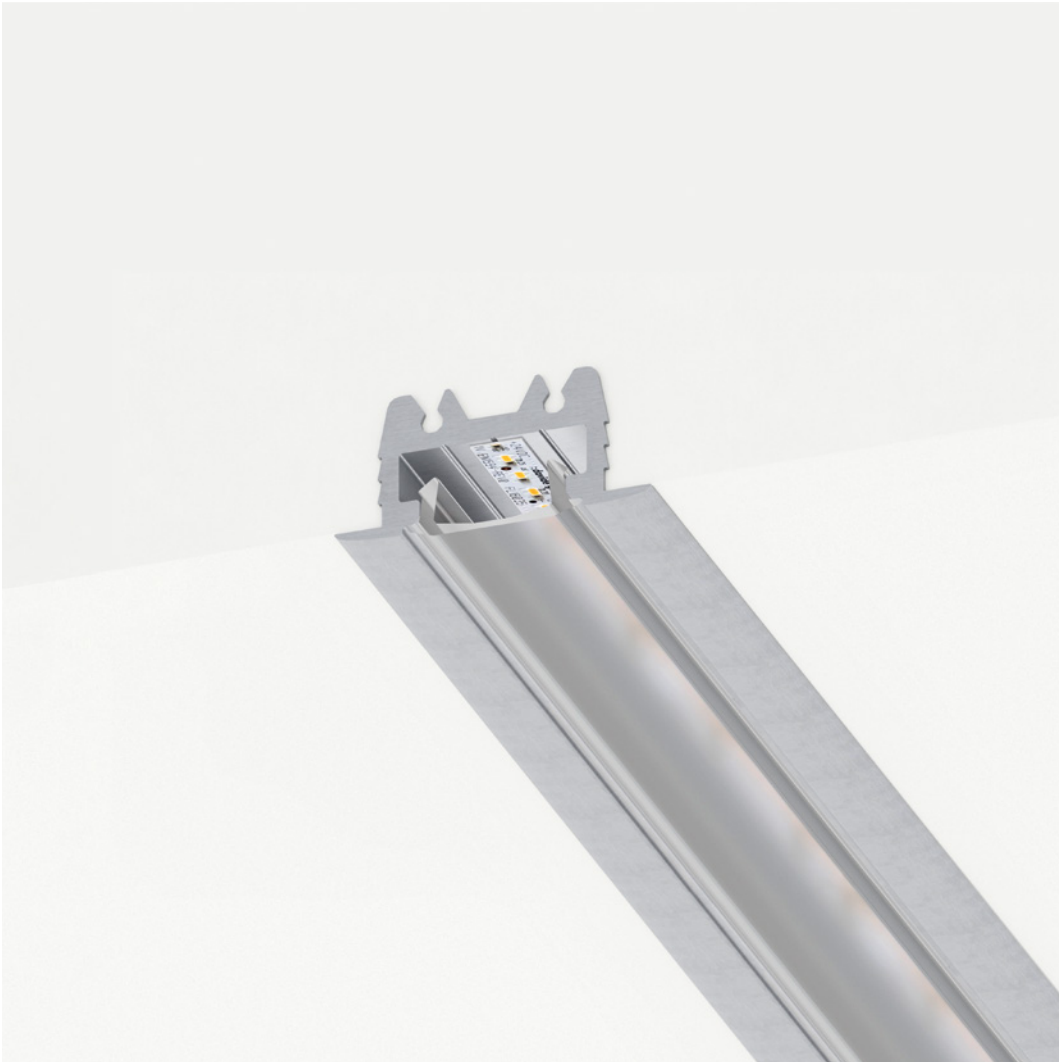
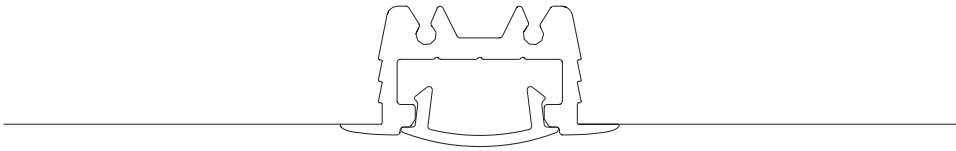



Tracks and profiles-Recessed / Direct / Indoor		
Material	Metal	
Finish	.00 Standard	
Note	Recessed profile with continuous light.	Profilo da incasso a luce continua.

Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione		
	Aluminium profile 2 m / Profilo in alluminio 2 m	Not included
	Standard	1A4970000.18.00
	Opal cover 2 m / Diffusore opale 2 m	Not included
	Standard	1A4970000.19.00

Compulsory accessories / Accessori obbligatori

LED modules / Moduli LED			
	Strip LED - 5 m - IP20		Not included
	Input 24V DC - 12,5W/m - IP20 2700K - 1240lm/m - CRI >94	1A5010000.27.20	
	Strip LED - 5 m - IP20		Not included
	Input 24V DC - 12,5W/m - IP20 3000K - 1380lm/m - CRI >94	1A5010000.30.20	
	Strip LED - 5 m - IP20		Not included
	Input 24V DC - 14,4W/m - IP20 2700K - 1420lm/m - CRI >80	1A4980000.27.20	
	Strip LED - 5 m - IP20		Not included
	Input 24V DC - 14,4W/m - IP20 3000K - 1575lm/m - CRI >80	1A4980000.30.20	
	Strip LED - 5 m - IP65		Not included
	Input 24V DC - 19,2W/m - IP20 2700K - 2100lm/m - CRI >80	1A4990000.27.20	
	Strip LED - 5 m - IP65		Not included
	Input 24V DC - 19,2W/m - IP20 3000K - 2340lm/m - CRI >80	1A4990000.30.20	
Drivers / Alimentatori			
	Driver / Alimentatore		Not included
	100-240V	24V/80W/IP20/ON/OFF	1Z1120440
	Driver / Alimentatore		Not included
	100-240V	24V/96W/IP67/1-10V	1Z1120540
	Driver / Alimentatore		Not included
	100-240V	24V/150W/IP67/1-10V	1Z1120500
	Controller		Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20		1Z2170010

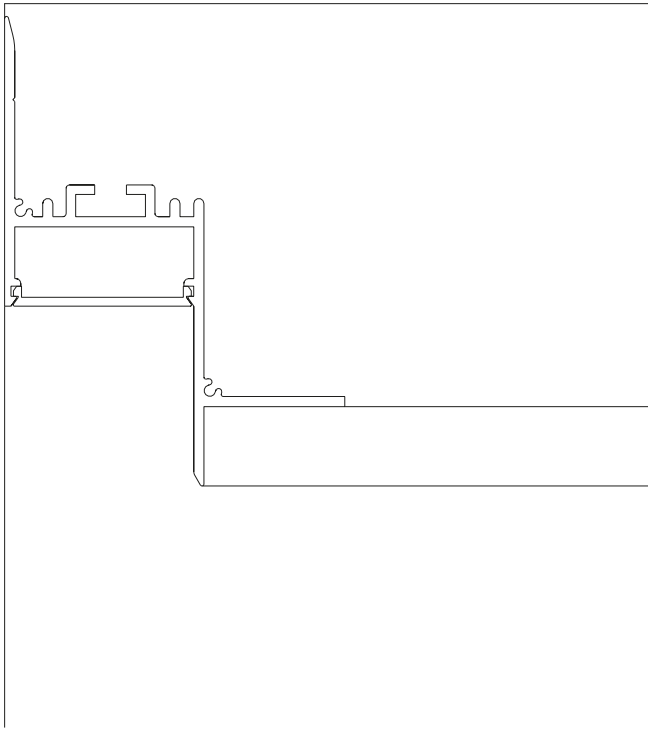

OUTDOOR / ESTERNO



BELLADINOTTE

Maurizio Mancini / 2012


The magic of the mirror brought into the garden.
A study of camouflage. The reflective surface is used as a tool
to camouflage and hide the machine to create light.
The reflection of the environment makes the luminaire invisible.

La magia dello specchio portata in giardino.
Un lavoro sulla mimetica. La superficie riflettente utilizzata come strumento
per mimetizzare e nascondere la macchina per fare luce.
La riflessione del contesto ambientale rende invisibile il corpo illuminante.

Floor / Indirect / Outdoor

Material Metal
Finish .00 Standard

Note Outdoor lamp with spike. Adjustable along the vertical axis. Plane with mirror finish. Matt green mirror finish rear plane. Black cable (5 m). *Apparecchio illuminante da esterno a picchetto. Orientabile lungo l'asse verticale. Piano con finitura a specchio. Retro del piano a specchio verde opaco. Cavo nero (5 m).*



BELLADINOTTE

2x4,2W
24V DC
2700K - 2x262lm / 3000K - 2x282lm
CRI >90
Driver not included


CE IP67

Standard - 2700K
Standard - 3000K

1A3560000.27.20
1A3560000.30.20

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver / Alimentatore		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



Driver connector IP68 / Connettore driver IP68		Included
1 Piece		1A1660000.00.00





BUBKA

Daniele Sprega / 2014

A perfect tool to make outdoor light.
The light as a tool for guiding people along a path.

Un perfetto utensile per fare la luce fuori.
La luce come strumento per condurre le persone lungo i percorsi.

BUBKA

Floor / Direct / Outdoor

Material

AISI 316L Stainless Steel - Metal

Finish


.00 Standard

Note

Outdoor floor luminaire. Adjustable along the vertical axis. AISI 316L stainless steel stem. Black cable (7 m).

Daniele Sprega / 2014

Apparecchio illuminante da esterno da terra. Orientabile lungo l'asse verticale. Stelo in inox AISI 316L. Cavo nero (7 m).



BUBKA
8,4W
Max 700mA DC
2700K - 639lm / 3000K - 639lm
CRI >90
Driver not included
CE IP65

Standard - 2700K	1A3600000.27.20
Standard - 3000K	1A3600000.30.20

Daniele Sprega / 2014

BUBKA

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori

Driver / Alimentatore		Not included
220-240V(100-127V)	700mA/30W(15W)/IP68/ON/OFF	1Z0241110

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione

Driver connector IP68 / Connettore driver IP68		Included
1 Piece		1A1660000.00.00

Anchoring bolt / Tirafondo		Not included
Cut-out Ø 250 mm Minimum space for mounting 350 mm		1A3620000.00.00

Lighting modules / Corpi illuminanti

Additional LED head / Testa LED supplementare		Not included
Matt Black	Max 700mA DC - 8,4W 3000K - 639lm - CRI >90	1A3610400.30.20
	Max 700mA DC - 8,4W 2700K - 639lm - CRI >90	1A3610400.27.20

703



BUBKA BOLLARD


Daniele Sprega / 2021




A perfect tool to make outdoor light.
The light as a tool for guiding people along a path.

Un perfetto utensile per fare la luce fuori.
La luce come strumento per condurre le persone lungo i percorsi.

Floor / Direct / Outdoor		
Material	AISI 316L Stainless Steel - Metal	
Finish	.00 Standard	
Note	Outdoor floor luminaire. Adjustable along the vertical axis. AISI 316L stainless steel stem. Black cable (9 m).	

Apparecchio illuminante da esterno da terra. Orientabile lungo l'asse verticale. Stelo in inox AISI 316L. Cavo nero (9 m).

	BUBKA BOLLARD	
	8,4W	
	Max 700mA DC	
	2700K - 350lm / 3000K - 350lm	
CRI >90		Standard - 2700K
Driver not included		Standard - 3000K
CE IP65		1A1440000.27.20
		1A1440000.30.20

Compulsory accessories / Accessori obbligatori		
Drivers / Alimentatori		
	Driver / Alimentatore	Not included
	220-240V(100-127V) 350mA/17W(15W)/IP68/ON/OFF	1Z0240880
Optional accessories / Accessori opzionali		
Installation kits / Kit d'installazione		
	Driver connector IP68 / Connettore driver IP68	Included
	1 Piece	1A1660000.00.00
	Anchoring bolt / Tirafondo	Not included
	Cut-out Ø 250 mm	1A3620000.00.00
	Minimum space for mounting 350 mm	
Lighting modules / Corpi illuminanti		
	Additional LED head / Testa LED supplementare	Not included
	Matt Black	Max 700mA DC - 8,4W
		2700K - 639lm - CRI >90
		Max 700mA DC - 8,4W
		3000K - 639lm - CRI >90




BUIO

Maurici Ginés / 2023

A small black dot reveals its function only when necessary.
For us the secret of light lies not in its shape, or in some technical virtuosity,
but in the choice and assumption of a method,
the method of amazement and memory.

Un piccolo punto nero svela la sua funzione solo quando necessario.
Per noi il segreto della luce non è nella forma, o in alcuni virtuosismi produttivi,
ma nella scelta e nell'assunzione di un metodo,
il metodo dello stupore e della memoria.


Recessed / Direct / Outdoor	
Material	Metal
Finish	.04 Matt Black
Note	Outdoor luminaire. Available with transparent or black glass. <i>Apparecchio illuminante da esterno. Disponibile con vetro trasparente o nero. Cavo nero (1 m).</i>



BUIO TRIM - 13°
Black filter
6,4W
24V DC
2700K - 93lm / 3000K - 93lm
CRI >90
Beam 13°
UGR <19
Driver not included
CE IP65/IP67

Matt Black - 2700K
Matt Black - 3000K


1A5120400.27.20
1A5120400.30.20



BUIO TRIM - 25°
Black filter
6,4W
24V DC
2700K - 158lm / 3000K - 158lm
CRI >90
Beam 25°
UGR <19
Driver not included
CE IP65/IP67

Matt Black - 2700K
Matt Black - 3000K


1A5140400.27.20
1A5140400.30.20



BUIO TRIM - 32°
Black filter
6,4W
24V DC
2700K - 144lm / 3000K - 144lm
CRI >90
Beam 32°
UGR <19
Driver not included
CE IP65/IP67

Matt Black - 2700K
Matt Black - 3000K


1A5130400.27.20
1A5130400.30.20



BUIO TRIM ELLIPTICAL
Black filter
6,4W
24V DC
2700K - 91lm / 3000K - 91lm
CRI >90
UGR <19
Driver not included
CE IP65/IP67

Matt Black - 2700K
Matt Black - 3000K


1A5150400.27.20
1A5150400.30.20



BUIO TRIM - 13°
Transparent filter
6,4W
24V DC
2700K - 247lm / 3000K - 247lm
CRI >90
Beam 13°
UGR <19
Driver not included
CE IP65/IP67

Matt Black - 2700K
Matt Black - 3000K


1A5160400.27.20
1A5160400.30.20



BUIO TRIM - 25°
Transparent filter
6,4W
24V DC
2700K - 257lm / 3000K - 257lm
CRI >90
Beam 25°
UGR <19
Driver not included
CE IP65/IP67

Matt Black - 2700K
Matt Black - 3000K


1A5180400.27.20
1A5180400.30.20



BUIO TRIM - 32°
Transparent filter
6,4W
24V DC
2700K - 297lm / 3000K - 297lm
CRI >90
Beam 32°
UGR <19
Driver not included
CE IP65/IP67

Matt Black - 2700K
Matt Black - 3000K

1A5170400.27.20
1A5170400.30.20




BUIO TRIM ELLIPTICAL
Transparent filter
6,4W
24V DC
2700K - 233lm / 3000K - 233lm
CRI >90
UGR <19
Driver not included
CE IP65/IP67

Matt Black - 2700K
Matt Black - 3000K

1A5190400.27.20
1A5190400.30.20






BUIO TRIMLESS - 13°
Black filter
6,4W
24V DC
2700K - 93lm / 3000K - 93lm
CRI >90
Beam 13°
UGR <19
Driver not included
CE IP65/IP67

Matt Black - 2700K
Matt Black - 3000K


1A5200400.27.20
1A5200400.30.20



BUIO TRIMLESS - 25°
Black filter
6,4W
24V DC
2700K - 158lm / 3000K - 158lm
CRI >90
Beam 25°
UGR <19
Driver not included
CE IP65/IP67

Matt Black - 2700K
Matt Black - 3000K


1A5220400.27.20
1A5220400.30.20



BUIO TRIMLESS - 32°
Black filter
6,4W
24V DC
2700K - 144lm / 3000K - 144lm
CRI >90
Beam 32°
UGR <19
Driver not included
CE IP65/IP67

Matt Black - 2700K
Matt Black - 3000K


1A5210400.27.20
1A5210400.30.20



BUIO TRIMLESS ELLIPTICAL
Black filter
6,4W
24V DC
2700K - 91lm / 3000K - 91lm
CRI >90
UGR <19
Driver not included
CE IP65/IP67

Matt Black - 2700K
Matt Black - 3000K


1A5230400.27.20
1A5230400.30.20



BUIO TRIMLESS - 13°
Transparent filter
6,4W
24V DC
2700K - 247lm / 3000K - 247lm
CRI >90
Beam 13°
UGR <19
Driver not included
CE IP65/IP67

Matt Black - 2700K
Matt Black - 3000K


1A5240400.27.20
1A5240400.30.20



BUIO TRIMLESS - 25°
Transparent filter
6,4W
24V DC
2700K - 257lm / 3000K - 257lm
CRI >90
Beam 25°
UGR <19
Driver not included
CE IP65/IP67

Matt Black - 2700K
Matt Black - 3000K


1A5260400.27.20
1A5260400.30.20



BUIO TRIMLESS - 32°
Transparent filter
6,4W
24V DC
2700K - 297lm / 3000K - 297lm
CRI >90
Beam 32°
UGR <19
Driver not included
CE IP65/IP67

Matt Black - 2700K
Matt Black - 3000K

1A5250400.27.20
1A5250400.30.20




BUIO TRIMLESS ELLIPTICAL
Transparent filter
6,4W
24V DC
2700K - 233lm / 3000K - 233lm
CRI >90
UGR <19
Driver not included
CE IP65/IP67

Matt Black - 2700K
Matt Black - 3000K

1A5270400.27.20
1A5270400.30.20


Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione



Installation box / Cassaforma		Not included
Standard	1A5280000.00.00	

Drivers / Alimentatori



Driver / Alimentatore		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



Driver connector IP68 / Connettore driver IP68		Included
1 Piece	1A1660000.00.00	





BUIO - SPOT

Maurici Ginés / 2023

A small black dot reveals its function only when necessary.
For us the secret of light lies not in its shape, or in some technical virtuosity,
but in the choice and assumption of a method,
the method of amazement and memory.

Un piccolo punto nero svela la sua funzione solo quando necessario.
Per noi il segreto della luce non è nella forma, o in alcuni virtuosismi produttivi,
ma nella scelta e nell'assunzione di un metodo,
il metodo dello stupore e della memoria.

BUIO - SPOT


Maurici Ginés / 2023

Floor-Wall-Ceiling / Direct / Outdoor

Material Metal
Finish .04 Matt Black


Note Outdoor luminaire. Adjustable spike and wall versions. Available with transparent or black glass. AISI 316L stainless steel accessories for the spike and wall versions. Black cable (1 m).

Apparecchio illuminante da esterno. Orientabile nella versione a picchetto e da parete. Disponibile con vetro trasparente o nero. Accessori per la versione a picchetto e da parete in inox AISI 316L. Cavo nero (1 m).



BUIO - 13°
Black filter
6,4W
24V DC
2700K - 93lm / 3000K - 93lm
CRI >90
Beam 13°
UGR <19
Driver not included
CE IP67

Matt Black - 2700K 1A5040400.27.20
Matt Black - 3000K 1A5040400.30.20




BUIO - 25°
Black filter
6,4W
24V DC
2700K - 158lm / 3000K - 158lm
CRI >90
Beam 25°
UGR <19
Driver not included
CE IP67

Matt Black - 2700K 1A5060400.27.20
Matt Black - 3000K 1A5060400.30.20


Maurici Ginés / 2023

BUIO - SPOT




BUIO - 32°
Black filter
6,4W
24V DC
2700K - 144lm / 3000K - 144lm
CRI >90
Beam 32°
UGR <19
Driver not included
CE IP67

Matt Black - 2700K 1A5050400.27.20
Matt Black - 3000K 1A5050400.30.20



BUIO ELLIPTICAL
Black filter
6,4W
24V DC
2700K - 91lm / 3000K - 91lm
CRI >90
UGR <19
Driver not included
CE IP67

Matt Black - 2700K 1A5070400.27.20
Matt Black - 3000K 1A5070400.30.20




BUIO - 13°

Transparent filter
6,4W
24V DC
2700K - 247lm / 3000K - 247lm
CRI >90
Beam 13°
UGR <19
Driver not included



Matt Black - 2700K
Matt Black - 3000K

1A5080400.27.20
1A5080400.30.20




BUIO - 25°

Transparent filter
6,4W
24V DC
2700K - 257lm / 3000K - 257lm
CRI >90
Beam 25°
UGR <19
Driver not included



Matt Black - 2700K
Matt Black - 3000K

1A5100400.27.20
1A5100400.30.20




BUIO - 32°

Transparent filter
6,4W
24V DC
2700K - 297lm / 3000K - 297lm
CRI >90
Beam 32°
UGR <19
Driver not included



Matt Black - 2700K
Matt Black - 3000K

1A5090400.27.20
1A5090400.30.20



BUIO ELLIPTICAL

Transparent filter
6,4W
24V DC
2700K - 233lm / 3000K - 233lm
CRI >90
UGR <19
Driver not included






Matt Black - 2700K
Matt Black - 3000K

1A5110400.27.20
1A5110400.30.20




Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione

	Wall bracket / Staffa da parete		Not included
	Stainless Steel	Brushed INOX	1A4431000.00.00
	Ceiling rose / Rosone		Not included
	Matt Black	Brushed INOX	1A4441000.00.00
	Earth spike / Picchetto		Not included
	Stainless Steel	Brushed INOX	1A4451000.00.00
	Tree strap / Cinghia per albero		Not included
	Standard	Length 1 m	1A4590000.00.00


Drivers / Alimentatori

	Driver / Alimentatore		Not included
	110-240V	24V/25W/IP67/ON/OFF	1Z1120620

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione

	Driver connector IP68 / Connettore driver IP68		Included
	1 Piece		1A1660000.00.00

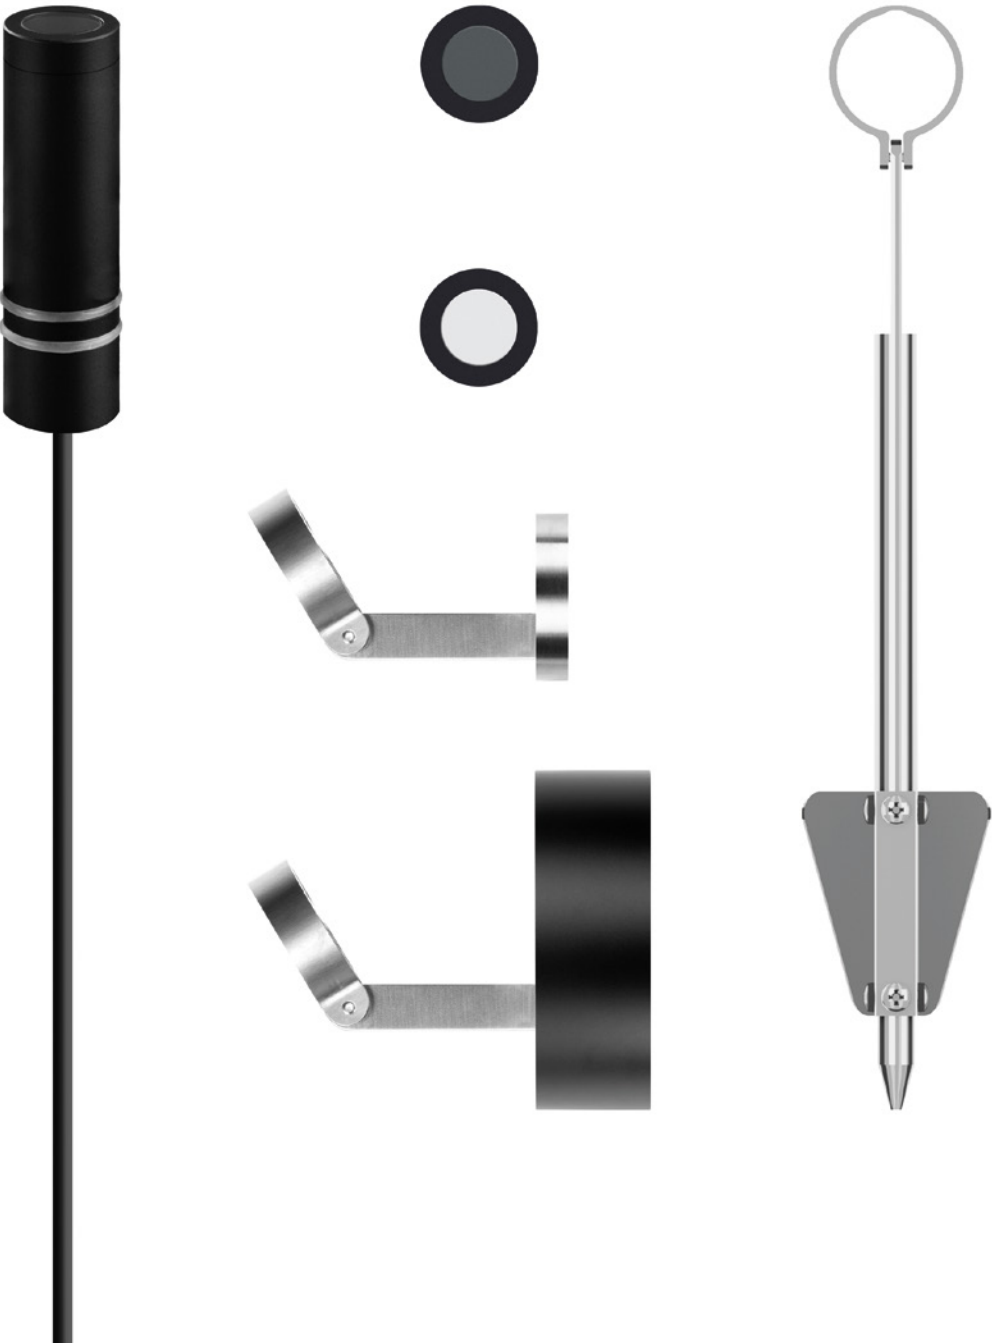




A tool to light.

The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.

Elemento di luce.

Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.
La luce si integra con lo spazio diventando elemento architettonico.

Wall / Direct / Outdoor		
Material	Glass - Metal	
Finish	.03 Matt White	
Note	Outdoor wall luminaire. Adjustable along the vertical axis.	Apparecchio illuminante da esterno da parete. Orientabile lungo l'asse verticale.

	CHILLOUT Max 12W - E27 100-240V - 50/60Hz ON/OFF Bulb not included C E IP65	Matt White - ON/OFF	1A3660300.00.00
---	---	---------------------	-----------------

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



Driver connector IP68 / Connettore driver IP68	Included
1 Piece	1A1660000.00.00

Bulbs / Lampadine



LED - E27 - PAR30s	Not included
220-240V - 9,5W - 25° 3000K - 760lm - CRI >80 Energy Efficiency F - Dimmable	1Y0330730





GRILLO

Daniele Sprega / 2012

A small luminous elf that you can install in your garden or inside a vase.

A thin stem stuck into the ground and a little adjustable LED projector.

For illuminating a flower, a plant or simply to accompany us along a path.

Lamp with spike.

Un piccolo elfo luminoso da installare in giardino o all'interno di un vaso.

Uno stelo sottile incastrato nel terreno e un piccolo proiettore a LED orientabile.

Per illuminare un fiore, una pianta o semplicemente per accompagnare un percorso.

Lampada con picchetto.

GRILLO

Daniele Sprega / 2012

Floor / Direct / Outdoor

Material

AISI 316L Stainless Steel - Metal

Finish

.04 Matt Black

Note

Outdoor lamp with spike. Adjustable in all directions. AISI 316L stainless steel stem. Black cable (5 m).

Apparecchio illuminante da esterno a picchetto. Orientabile in tutte le direzioni. Stelo in inox AISI 316L. Cavo nero (5 m).

GRILLO
4,2W
24V DC
2700K - 262lm / 3000K - 282lm
CRI >90
Driver not included
CE IP67

Matt Black - 2700K	1A3570400.27.20
Matt Black - 3000K	1A3570400.30.20

734

Daniele Sprega / 2012

GRILLO

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori

Driver / Alimentatore		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione

Driver connector IP68 / Connettore driver IP68		Included
1 Piece		1A1660000.00.00

Additional stem 1 m / Stelo supplementare 1 m

Standard

AISI 316L stainless steel

1A3590000.00.00

Not included

Lighting modules / Corpi illuminanti

Additional LED head / Testa LED supplementare		Not included
Matt Black	24V DC - 4,2W	1A3580400.27.20
	2700K - 262lm - CRI >90	
	24V DC - 4,2W	1A3580400.30.20
	3000K - 282lm - CRI >90	

735



HAZARD

Davide Groppi / 2023


We have always been thrilled by bare, abandoned lamps.
On the walls of mountain huts, in the countryside of our plain.
Unfinished works, lamps still to be decided, ephemeral thoughts that become poetry.
Wall lamp with direct light for outdoor environments
with steel nail subject to natural oxidation over time.

Ci hanno sempre emozionato le lampadine abbandonate, nude.
Sui muri delle case di montagna, nelle campagne della nostra pianura.
Lavori non ancora finiti, lampade ancora da decidere,
pensieri effimeri che diventano poesia.
Lampada da parete a luce diretta per ambienti esterni
con chiodo in acciaio soggetto ad ossidazione naturale nel tempo.


HAZARD

Davide Groppi / 2023

Wall / Direct / Outdoor		
Material	Metal - Thermoplastic resin	
Finish	.00 Standard	
Note	Outdoor wall luminaire. One red and one black cable (1,5 m).	
	Apparecchio illuminante da esterno da parete. Un cavo rosso e un cavo nero (1,5 m).	

	HAZARD 0,6W - E27 36V DC 2200K - 50lm CRI 80 Driver not included Bulb included CE IP65	
	Standard - 2200K	1A4210000.22.20

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori		Not included
	Driver / Alimentatore	
	110-240V 36V/36W/IP67/ON/OFF 1Z1120590	





Light has found a home.

A lamp designed to welcome, illuminating the entrance.

La luce ha trovato casa.

Una lampada pensata per dare il benvenuto, per illuminare la soglia.

IMU

Omar Carraglia / 2013

Wall / Direct / Outdoor

Material

Metal

Finish


.00 Standard

Note

Outdoor wall luminaire. Matt black body and matt red top cover.

Red hole light.

Apparecchio illuminante da esterno da parete. Corpo nero opaco e tetto rosso opaco. Luce del foro rossa.



IMU

5,5W

Max 350mA DC

3000K - 306lm

CRI >80

Driver not included


CE IP65

Standard - 3000K

1A3550000.30.20

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver / Alimentatore			Not included
220-240V(100-127V)	350mA/17W(15W)/IP68/ON/OFF	1Z0240880	

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



Driver connector IP68 / Connettore driver IP68			Included
1 Piece		1A1660000.00.00	






Light, waiting for Romeo.

An outdoor light, for walls or to illuminate the entrance.

La luce, aspettando Romeo.

Una luce per esterno, sulle pareti o per illuminare le soglie.

Wall / Diffuse / Outdoor		
Material	Glass - Metal	
Finish	.03 Matt White	
Note	Outdoor wall luminaire.	Apparecchio illuminante da esterno da parete.



JULIET
18W
220-240V - 50/60Hz
2700K - 827lm / 3000K - 865lm
CRI >80
TRIAC/IGBT
CE IP65

Matt White - 2700K - TRIAC/IGBT	1A3670300.27.02
Matt White - 3000K - TRIAC/IGBT	1A3670300.30.02

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



Driver connector IP68 / Connettore driver IP68	Included
1 Piece	1A1660000.00.00





LENTA

Bestetti Associati - Davide Groppi / 2011

A lantern. Soft and diffuse light.
A Slow-Light project for outdoors.

Una lanterna, luce morbida e diffusa.
Un progetto di slow-light per l'outdoor.

LENTA

Bestetti Associati - Davide Groppi / 2011

Floor / Diffuse / Outdoor

Material

Metal - Methacrylate - Polycarbonate


Finish

.03 Matt White

Note

Outdoor floor luminaire. Matt white diffuser. Black cable (5 m).

Apparecchio illuminante da esterno da terra. Diffusore bianco opaco. Cavo nero (5 m).



LENTA

Max 18W - E27

100-240V - 50/60Hz

ON/OFF

Bulb not included

CE IP65

Matt White - ON/OFF

1A3630300.00.00

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



Driver connector IP68 / Connettore driver IP68

Included

1 Piece

1A1660000.00.00

Bulbs / Lampadine



LED - E27 - A60

Not included


220-240V - 11,2W - 360°

2700K - 1521lm - CRI >90

Energy Efficiency D - Dimmable

1Y0330790

Other accessories / Altri accessori



IP65 Schuko adapter / Adattatore Schuko IP65

Not included

IP65

1A2950000.00.00






NEURO OUTDOOR

Davide Groppi - Beppe Merlano / 2022

The idea is to bring light wherever you like.
A simple project: a cable and a LED.
Indoor version also available.

È l'idea di portare la luce dove si desidera.
Un progetto semplice: un cavo e un modulo LED.
Disponibile anche nella versione indoor.

Suspension / Direct / Outdoor		
Material	AISI 316L Stainless Steel - Metal	
Finish	.04 Matt Black	.32 Copper Oxide
Note	Outdoor suspension luminaire. Black cable (10 m).	Apparecchio illuminante da esterno a sospensione. Cavo nero (10 m).



NEURO OUTDOOR

4,2W
24V DC
2700K - 262lm / 3000K - 282lm
CRI >90
Driver not included


CE IP65

Matt Black - 2700K
Matt Black - 3000K
Copper Oxide - 2700K
Copper Oxide - 3000K

1A4030400.27.20
1A4030400.30.20
1A4033200.27.20
1A4033200.30.20

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver / Alimentatore		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



Driver connector IP68 / Connettore driver IP68		Included
1 Piece		1A1660000.00.00

Matt Black



Copper Oxide






NUIT

Maurici Ginés / 2023

Night has always been a source of inspiration.
We walk, and we are not alone.
Nuit is a small travel companion that draws our night-time journeys.
Bronze Delta ADI-FAD Award 2024

La notte è sempre fonte di ispirazione.
Camminiamo e non siamo soli.
Nuit è una piccola compagna di viaggio che disegna i nostri transiti notturni.
Bronze Delta ADI-FAD Award 2024

Recessed / Diffuse / Indoor-Outdoor				
Material	Metal			
Finish	.03 Matt White	.27 Gravity Black	.38 Blasted Inox	
Note	Outdoor recessed luminaire.		Apparecchio illuminante da esterno da incasso.	



NUIT

1W
24V DC
2700K - 33lm / 3000K - 34lm
CRI >90
Driver not included




Matt White - 2700K
Matt White - 3000K
Gravity Black - 2700K
Gravity Black - 3000K
Blasted Inox - 2700K
Blasted Inox - 3000K

1A1320300.27.20
1A1320300.30.20
1A1322700.27.20
1A1322700.30.20
1A1323800.27.20
1A1323800.30.20

Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione




Concrete box / Cassaforma per cemento		Not included
Standard	1A4460000.00.00	



Plasterboard frame 12,5 mm / Cornice per cartongesso 12,5 mm		Not included
Matt White	Cut-out 100x100 mm Minimum space for mounting 110 mm	1A4470300.00.00


Drivers / Alimentatori



Driver / Alimentatore		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione




Adapter plasterboard 25 mm / Adattatore per cartongesso 25 mm		Not included
Standard	1A5030000.00.00	




Driver connector IP68 / Connettore driver IP68		Included
1 Piece		1A1660000.00.00



Matt White



Gravity Black



Blasted Inox





ORIGINE OUTDOOR

Davide Groppi - Giorgio Rava / 2020

From the Latin "origo", start, birth, source.
It appears like a bud emerging from the ground and soaring upwards towards the sky,
a stem that becomes increasingly thinner. Mysterious, enigmatic but comfortable,
it combines the fascination of the unknown
with the pleasure of a sophisticated and elegant ambient light.
Origine sculpts and enhances every environment with its indirect light,
which is intentionally non-invasive, graphic and fascinating.

Indoor version also available.

AZ Award 2021 and People's Choice
Archiproducts Design Award 2020

Dal latino "origo", inizio, nascita, fonte.
Evoca un germoglio che emerge dalla terra e si slancia verso il cielo,
lo stelo che diventa sempre più sottile. Misteriosa, enigmatica ma confortevole,
unisce il fascino dell'incognito al piacere di una luce d'ambiente sofisticata ed elegante.
Origine scolpisce e valorizza ogni ambiente con la sua luce indiretta,
volutamente non invasiva, grafica e affascinante.
Disponibile anche nella versione indoor.

AZ Award 2021 e People's Choice
Archiproducts Design Award 2020

ORIGINE OUTDOOR


Davide Groppi - Giorgio Rava / 2020

Floor / Indirect / Outdoor

Material	Glass fiber - Metal
Finish	.04 Matt Black

Note Outdoor floor luminaire. Black cable (5 m).

Apparecchio illuminante da esterno da terra. Cavo nero (5 m).



ORIGINE OUTDOOR

35W

24V DC

2700K - 2872lm / 3000K - 2930lm

CRI >80

Driver not included



Matt Black - 2700K


Matt Black - 3000K

1A2480400.27.20

1A2480400.30.20

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver / Alimentatore

100-240V

24V/60W/IP67/1-10V

Not included

1Z1120260

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



Driver connector IP68 / Connettore driver IP68

1 Piece

Included

1A1660000.00.00







Q²

Alberto Zattin / 2006

A piece of architecture to be used in space.
A concrete cube that allows you to understand volumes and architecture
in an unusual and sometimes unprecedented way.
Indoor version also available.

Un pezzo di architettura da utilizzare nello spazio.
Un cubo realizzato in cemento che permette di interpretare i volumi e le architetture
in modo inconsueto e talvolta inedito.
Disponibile anche nella versione indoor.

Q²

Alberto Zattin / 2006

Floor / Direct / Outdoor

Material

Cement - Metal


Finish

.00 Standard


Note

Outdoor floor luminaire. Concrete body. Black cable (2,5 m).

Apparecchio illuminante da esterno da terra. Corpo in cemento. Cavo nero (2,5 m).

	Q² 20W Max 500mA DC 3000K - 2058lm CRI >90 Driver not included CE  IP67	Standard - 3000K	1A1150000.30.20
---	---	------------------	-----------------

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori			
	Driver / Alimentatore	Not included	
	220-240V(110-127V) 500mA/24W(15W)/IP68/ON/OFF	1Z0241170	

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione			
	Driver connector IP68 / Connettore driver IP68	Included	
	1 Piece	1A1660000.00.00	





SAMPEI OUTDOOR



Enzo Calabrese - Davide Groppi / 2011


A star that shines in the sky.
We wanted to go further, beyond the usual meaning of a floor lamp.
It is like watching a tiny miracle, an unexpected magic.
A soft glow comes from far away,
suggesting unforeseen solutions and indicating lost details.

Una stella che brilla nel cielo.
Siamo voluti andare oltre, superando il senso comune del significato di lampada da terra.
È come assistere ad un piccolo miracolo, una magia inattesa.
Un bagliore gentile che arriva da lontanissimo
e che suggerisce soluzioni impreviste, indica dettagli smarriti.



Floor / Direct / Outdoor				
Material	Glass fiber - Metal			
Finish	.03 Matt White	.04 Matt Black	.20 Magic Blue	.35 Grey Green
	.40 Grey Beige			
Note	Outdoor floor luminaire. Adjustable in all directions. Black cable.		Apparecchio illuminante da esterno da terra. Orientabile in tutte le direzioni. Cavo nero.	

	SAMPEI 440 OUTDOOR 8,4W Max 700mA DC 2700K - 639lm / 3000K - 639lm CRI >90 Driver not included CE IP65	Matt White - 2700K Matt White - 3000K Matt Black - 2700K Matt Black - 3000K Magic Blue - 2700K Magic Blue - 3000K Grey Green - 2700K Grey Green - 3000K Grey Beige - 2700K Grey Beige - 3000K	1A3770300.27.20 1A3770300.30.20 1A3770400.27.20 1A3770400.30.20 1A3772000.27.20 1A3772000.30.20 1A3773500.27.20 1A3773500.30.20 1A3774000.27.20 1A3774000.30.20
	SAMPEI XXL OUTDOOR 12,8W Max 700mA DC 2700K - 1256lm / 3000K - 1313lm CRI >90 Driver not included CE IP65	Matt White - 2700K Matt White - 3000K Matt Black - 2700K Matt Black - 3000K Magic Blue - 2700K Magic Blue - 3000K Grey Green - 2700K Grey Green - 3000K Grey Beige - 2700K Grey Beige - 3000K	1A5330300.27.20 1A5330300.30.20 1A5330400.27.20 1A5330400.30.20 1A5332000.27.20 1A5332000.30.20 1A5333500.27.20 1A5333500.30.20 1A5334000.27.20 1A5334000.30.20

Compulsory accessories / Accessori obbligatori		
Drivers / Alimentatori		
		
Driver / Alimentatore		Not included
220-240V(100-127V)	700mA/30W(15W)/IP68/ON/OFF	1Z0241110
Optional accessories / Accessori opzionali		
Installation kits / Kit d'installazione		
		
Driver connector IP68 / Connettore driver IP68		Included
1 Piece		1A1660000.00.00



Palazzo Venier dei Leoni
Peggy Guggenheim Collection
Venezia

SAMPEI OUTDOOR

SHOJI OUTDOOR

Davide Groppi - Paola Lenti / 2013




A nylon lampshade, strictly hand-stitched and hand-made.
Indoor version also available.

Un paralume in nylon rigorosamente cucito e confezionato a mano.
Disponibile anche nella versione indoor.

SHOJI OUTDOOR

Davide Groppi - Paola Lenti / 2013

Floor / Diffuse / Outdoor	
Material	Metal - PBT - Polycarbonate
Finish	.00 Standard
Note	Outdoor floor luminaire. Hand-stitched shade. Matt black stems. Black cable (5 m). <i>Apparecchio illuminante da esterno da terra. Paralume cucito a mano. Steli nero opaco. Cavo nero (5 m).</i>

	SHOJI OUTDOOR Max 18W - E27 100-240V - 50/60Hz ON/OFF Bulb not included C E IP65	Standard - ON/OFF	1A3640000.00.00
---	--	-------------------	-----------------

Optional accessories / Accessori opzionali


Installation kits / Kit d'installazione

	Driver connector IP68 / Connettore driver IP68	Included
	1 Piece	1A1660000.00.00

Bulbs / Lampadine

	LED - E27 - A60	Not included
	220-240V - 11,2W - 360° 2700K - 1521lm - CRI >90 Energy Efficiency D - Dimmable	1Y0330790

Other accessories / Altri accessori

	IP65 Schuko adapter / Adattatore Schuko IP65	Not included
	IP65	1A2950000.00.00




A tool to light.

The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.

Elemento di luce.


Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.
La luce si integra con lo spazio diventando elemento architettonico.

Wall / Direct / Outdoor		
Material	Metal	
Finish	.03 Matt White	.04 Matt Black
Note	Outdoor wall and ceiling luminaire. Adjustable in all directions.	Apparecchio illuminante da esterno da parete e soffitto. Orientabile in tutte le direzioni.

	SPOT OUTDOOR 8,4W Max 700mA DC 2700K - 639lm / 3000K - 639lm CRI >90 Driver not included CE  IP65	Matt White - 2700K Matt White - 3000K Matt Black - 2700K Matt Black - 3000K	1A3650300.27.20 1A3650300.30.20 1A3650400.27.20 1A3650400.30.20
---	---	---	---

Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver / Alimentatore		Not included
220-240V(100-127V)	700mA/30W(15W)/IP68/ON/OFF	1Z0241110

Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione		
	Driver connector IP68 / Connettore driver IP68	
	Included	
	1 Piece	1A1660000.00.00

BULBS / LAMPADINE

	Socket	Voltage	Power	Beam Angle	CCT	Lumens	CRI	Energy Efficiency	Dimmable	Code
	E27	220-240V	7W	360°	2700K	806lm	>80	E	X	1Y2080010
	E27	220-240V	11,2W	360°	2700K	1521lm	>90	D	X	1Y0330790
	E27	220-240V	20W	200°	2700K	2452lm	>80	E	X	1Y2160020
	E27	220-240V	9,5W	25°	3000K	760lm	>80	F	X	1Y0330730
	GU4	12V	4W	24°	2700K	200lm	>80	G	-	1Y0330450
	GU5,3	12V	6,7W	36°	3000K	440lm	>97	G	X	1Y0330530
	GU10	220-240V	4,9W	120°	3000K	550lm	>80	E	-	1Y0330740
	GU10	220-240V	5,5W	25°	2700K	355lm	>97	G	X	1Y0330770
	GU10	220-240V	5,5W	25°	3000K	375lm	>97	G	X	1Y0330500
	GU10	230V	7,5W	10°	2700K	390lm	>95	G	X	1Y1580210
	GU10	230V	7,5W	10°	3000K	410lm	>95	G	X	1Y1580010
	R7s	220-240V	4W	330°	3000K	450lm	>80	E	-	1Y0000138

DG111 LED MODULES / MODULI LED DG111

	Current	Power	Beam Angle	CCT	Lumens	CRI	Energy Efficiency	Dimmable	Code
	350mA DC	11,7W	15°	2700K	1336lm	>90	F	X	1A4700000.27.20
	350mA DC	11,7W	15°	3000K	1364lm	>90	F	X	1A4700000.30.20
	350mA DC	11,7W	22°	2700K	1322lm	>90	F	X	1A3890000.27.20
	350mA DC	11,7W	22°	3000K	1382lm	>90	F	X	1A3890000.30.20
	350mA DC	11,7W	36°	2700K	1276lm	>90	F	X	1A3900000.27.20
	350mA DC	11,7W	36°	3000K	1343lm	>90	F	X	1A3900000.30.20
	500mA DC	16,7W	15°	2700K	1648lm	>90	F	X	1A4700000.27.20
	500mA DC	16,7W	15°	3000K	1682lm	>90	F	X	1A4700000.30.20
	500mA DC	16,7W	22°	2700K	1859lm	>90	F	X	1A3890000.27.20
	500mA DC	16,7W	22°	3000K	1943lm	>90	F	X	1A3890000.30.20
	500mA DC	16,7W	36°	2700K	1795lm	>90	F	X	1A3900000.27.20
	500mA DC	16,7W	36°	3000K	1890lm	>90	F	X	1A3900000.30.20

DRIVERS / ALIMENTATORI

	Power	Input	Output	Dimming	Protection	Code
	50W	230-240V	12V	TRIAC/IGBT	IP20	1Z0240440
	50W	220-240V	1400mA	TRIAC - PUSH	IP20	1Z0241370.1400
	55W(40W)	220-240V(110-120V)	1400mA	DALI - PUSH - 1-10V	IP20	1Z0240830.1400
	50W	100-240V	24V	ON/OFF	IP20	1Z1120490
	80W	100-240V	24V	ON/OFF	IP20	1Z1120440
	20W	220-240V	24V	TRIAC/IGBT	IP20	1Z0240850.24
	16W(15W)	220-240V(100-127V)	24V	DALI	IP20	1Z0241180.24
	20W(15W)	220-240V(100-127V)	24V	PUSH - 1-10V	IP20	1Z0240870.24
	3W	100-277	250mA	TRIAC/IGBT	IP20	1Z0400900
	12,5W	220-240V	250mA	TRIAC/IGBT	IP20	1Z0241280
	13,5W(13,5W)	220-240V(110-127V)	250mA	DALI - PUSH - 1-10V	IP20	1Z0241270.250

DRIVERS / ALIMENTATORI

	Power	Input	Output	Dimming	Protection	Code
	17W	220-240V	350mA	TRIAC/IGBT	IP20	1Z0240850.350
	17W(15W)	220-240V(100-127V)	350mA	DALI	IP20	1Z0241180.350
	18W(15W)	220-240V(100-127V)	350mA	PUSH - 1-10V	IP20	1Z0240870.350
	18W(18W)	220-240V(100-127V)	350mA	DALI - PUSH - 1-10V	IP20	1Z0240530.350
	60W	220-240V	48V	DALI	IP20	1Z0830820
	20W	220-240V	500mA	TRIAC/IGBT	IP20	1Z0240850.500
	20W(15W)	220-240V(100-127V)	500mA	DALI	IP20	1Z0241180.500
	20W(15W)	220-240V(100-127V)	500mA	PUSH	IP20	1Z0240840.500
	20W(15W)	220-240V(100-127V)	500mA	PUSH - 1-10V	IP20	1Z0240870.500
	25W(13,5W)	220-240V(110-127V)	500mA	DALI - PUSH - 1-10V	IP20	1Z0241270.500
	17,5W	100-240V	5V	ON/OFF	IP20	1Z1120180


DRIVERS / ALIMENTATORI

	Power	Input	Output	Dimming	Protection	Code
	120W	100-240V	24V	1-10V	IP67	1Z1120240
	150W	100-240V	24V	1-10V	IP67	1Z1120500
	60W	100-240V	24V	1-10V	IP67	1Z1120260
	96W	100-240V	24V	1-10V	IP67	1Z1120540
	25W	110-240V	24V	ON/OFF	IP67	1Z1120620
	36W	110-240V	36V	ON/OFF	IP67	1Z1120590
	150W	100-240V	48V	1-10V	IP67	1Z1120250
	240W	100-240V	48V	1-10V	IP67	1Z1120390
	60W	100-240V	48V	ON/OFF	IP67	1Z1120640
	80W	100-240V	48V	1-10V	IP67	1Z1120400
	17W(15W)	220-240V(100-127V)	350mA	ON/OFF	IP68	1Z0240880

DRIVERS / ALIMENTATORI

	Power	Input	Output	Dimming	Protection	Code
	24W(15W)	220-240V(110-127V)	500mA	ON/OFF	IP68	1Z0241170
	30W(15W)	220-240V(100-127V)	700mA	ON/OFF	IP68	1Z0241110

COMMON ACCESSORIES / ACCESSORI COMUNI

	Power	Input	Output	Dimming	Protection	Code
Controller Casambi - Radio signal 2.4 - 2.486 GHz						
		220-240V - 50Hz		DALI	IP20	1Z0400740
		220-240V - 50Hz		1-10 V	IP20	1Z0400660
	(75W) 150W	(110V) 240V - 50/60Hz		TRIAC	IP20	1Z0400670


COMMON ACCESSORIES / ACCESSORI COMUNI

	Size	Cut-out	Finish	Code
Plasterboard trapdoors / Botole in cartongesso				
	200x200 mm	205x205 mm	Standard	1A3780000.00.00
	400x400 mm	415x415 mm	Standard	1A3790000.00.00
Clamp / Bloccacavo				
	Ø 50x20 mm		Matt White	1X0110300.02.00
			Matt Black	1X0110400.02.00
Remote clamp for electrical cable / Bloccacavo remoto per cavo elettrico*				
	50x50x30 mm		Standard	1X0110000.01.00
Wall and ceiling rose / Rosone da parete e soffitto				
	Ø 80x28 mm		Matt White	1X0030300.01.00
			Matt Black	1X0030400.01.00
Driver connector IP68 / Connettore driver IP68				
			Standard	1A1660000.00.00

* For Class III suspension luminaire only / Solo per le lampade a sospensione in Classe III

SUSPENSION KITS / KIT DI SOSPENSIONE

Recessed suspension kit / Kit di sospensione da incasso

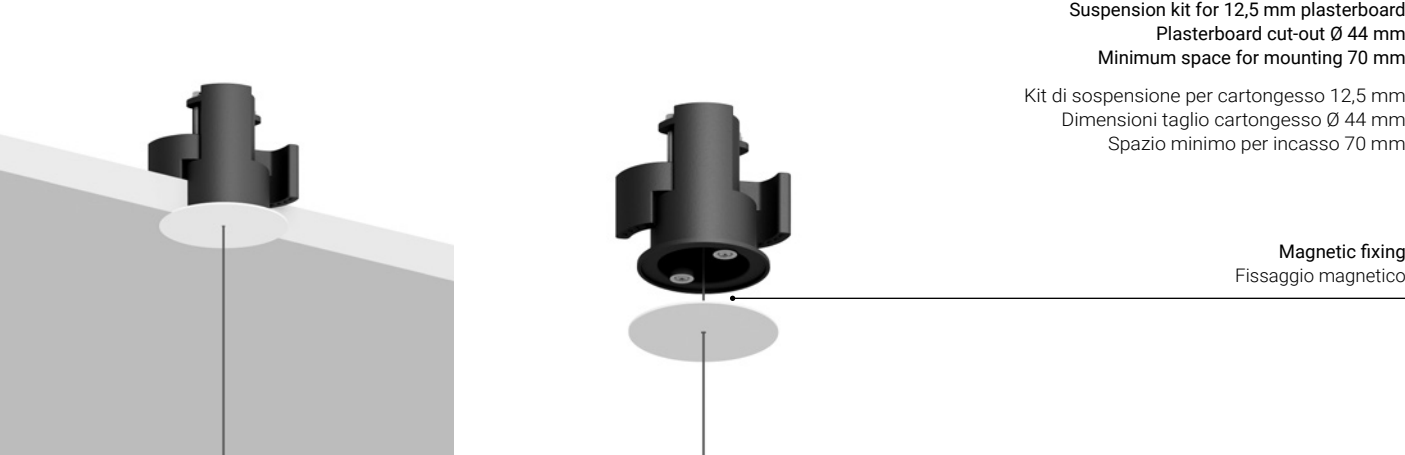


Version	Use	Product reference	Finish	Code
Recessed suspension kit 01	For suspension cables	SHANGHAI 1	Matt White	1X0000300.01.00
		SHANGHAI 2 SOTTILE 1 SOTTILE 1 DE SOTTILE 2 SOTTILE 2 DE	Matt Black	1X0000400.01.00
Recessed suspension kit 02	For electrical cables	MAGIA	Matt White	1X0000300.02.00
			Matt Black	1X0000400.02.00
Recessed suspension kit 03	For suspension cables	MASAI 1	Matt White	1X0000300.03.00
		MASAI 2 REFLEX S 1 REFLEX S 2 SPY	Matt Black	1X0000400.03.00
Recessed suspension kit 04	For electrical cables	ASINTOTO	Matt White	1X0000300.04.00
		REFLEX S 2 SHANGHAI 2 SOTTILE 2 SOTTILE 2 DE	Matt Black	1X0000400.04.00
Recessed suspension kit 05	For electrical cables	LOUIS XIV 2 SOTTOSOPRA 2	Matt White	1X0000300.05.00
			Matt Black	1X0000400.05.00
Recessed suspension kit 06	For electrical cables	CATHODE 2 LED IS MORE 2 MISS 2	Matt White	1X0000300.06.00
			Matt Black	1X0000400.06.00




SUSPENSION KITS / KIT DI SOSPENSIONE

Ceiling suspension kit / Kit di sospensione da soffitto

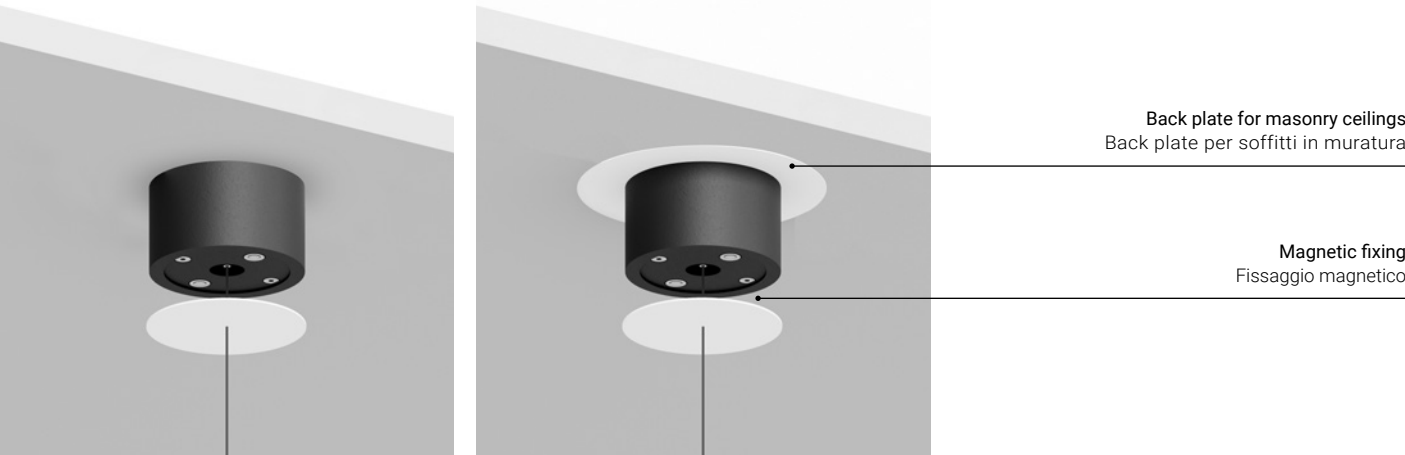

Version	Use	Product reference	Finish	Code
Ceiling suspension kit 01	For suspension cables	SHANGHAI 1 SHANGHAI 2 SOTTILE 1 SOTTILE 1 DE SOTTILE 2 SOTTILE 2 DE	Matt White	1X0010300.01.00
			Matt Black	1X0010400.01.00
Ceiling suspension kit 02	For electrical cables	MAGIA	Matt White	1X0010300.02.00
			Matt Black	1X0010400.02.00
Ceiling suspension kit 03	For suspension cables	MASAI 1 MASAI 2 REFLEX S 1 REFLEX S 2 SPY	Matt White	1X0010300.03.00
			Matt Black	1X0010400.03.00
Ceiling suspension kit 04	For electrical cables	ASINTOTO REFLEX S 2 SHANGHAI 2 SOTTILE 2 SOTTILE 2 DE	Matt White	1X0010300.04.00
			Matt Black	1X0010400.04.00
Ceiling suspension kit 06	For electrical cables	CATHODE 2 LED IS MORE 2 MISS 2	Matt White	1X0010300.06.00
			Matt Black	1X0010400.06.00
Back plate	For masonry ceilings		Matt White	1X0050300.01.00



General terms.

This document replaces any other previous one.
Davide Groppi s.r.l. reserves the right to change its products without notice. In this case, the descriptions printed here are not binding.
The sizes are expressed in millimeters.

Shipment.

Returned merchandise must be authorized in writing by Davide Groppi s.r.l.
Any claim must be made in writing to Davide Groppi s.r.l. within 7 days of the delivery date. If not, will not be accepted.

Warranty.

All products are guaranteed for 24 months from the date of delivery.
The warranty is not valid for damage caused by third parties.
Any damage resulting from improper installation or changes to products cannot be considered the responsibility of Davide Groppi s.r.l.

Rights.

No part of this document may be reproduced or transmitted in any form or by any means: electronic, mechanical or otherwise,
without the written permission of Davide Groppi s.r.l.

Jurisdiction.

For any dispute, Piacenza, Italy, will be the court of jurisdiction.

Privacy.

Davide Groppi s.r.l. protects the confidentiality of personal data as provided to articles 12, 13 and 14 of the European Regulation n. 679/2016 (GDPR).

Condizioni generali.

Il presente documento annulla e sostituisce ogni edizione precedente.
Davide Groppi s.r.l. si riserva la facoltà di modificare i propri prodotti senza preavviso pertanto le descrizioni riportate in questo documento non sono vincolanti.
Le dimensioni sono espresse in millimetri.

Spedizioni.

Resi di materiale sono accettati previa autorizzazione scritta dell'azienda.
Eventuali reclami sono considerati solo se comunicati per iscritto entro 7 giorni dalla data di consegna della merce.

Garanzia.

I prodotti di Davide Groppi s.r.l. sono garantiti per 24 mesi dalla data di consegna.
La garanzia non ha valore per danni causati da terzi.
Eventuali danni derivanti da errata installazione o da modifiche apportate ai prodotti non possono essere considerati responsabilità di Davide Groppi s.r.l.

Diritti.

Nessuna parte di questo documento può essere riprodotta o trasmessa in qualsiasi forma o con qualsiasi mezzo elettronico,
meccanico o altro senza l'autorizzazione scritta di Davide Groppi s.r.l.

Foro Competente.

Per eventuali controversie è competente il Foro di Piacenza.

Privacy.

La Davide Groppi s.r.l. tutela la riservatezza dei dati personali come previsto degli art. 12, 13 e 14 del Regolamento Europeo n. 679/2016 (GDPR).

People who work with me:

Nicoletta Adorni
Roberto Aroldi
Luca Arzani
Gabriele Baggi
Diego Balconi
Laura Bani
Rosa Bardella
Marco Benedetti
Elena Bernazzani
Nella Bisotti
Eleonora Bolzoni
Lorenzo Borsani
Enrica Brunetti
Cristina Bruzzi
Silvia Caborni
Riccardo Carini
Omar Carraglia
Moreno Casella
Alberto Cavazzi
Xhoana Cela
Beatrice Cerrelli
Sofia Cesarini
David Chicheportiche
Laura Claves
Claudia Clienti
Michael Cogni
Andrea Costa
Giacomo Costellini
Alessandro Cremaschi
Alessandra Dallagiovanna
Monica Dallavalle
Lara De Pietri
Stefano De Santis
Sabrina Delfini
Alberto Di Felice
Myzeien Elezi
Monica Fornasari
Lorenzo Fugazza
Daniela Galesi
Laura Garetti
Gabriele Gelmetti

Alessandro Ghisoni
Giovanni Giordano
Marina Girometta
Martin Grambozov
Danilo Groppi
Michele Groppi
Silvia Guardiani
Heather Huber
Eriola Kacbufi
Marialuisa Maffi
Giorgia Marzani
Katuscia Marzeddu
Simone Maserati
Giulia Mazzoni
Mirko Mocenighi
Marilena Molinari
Lorenzo Nicoli
Martina Orlandi
Chiara Orsi
Filippo Palumbo
Franca Peveri
Michelina Pinna
Luca Pompili
Vitalii Prosianiuk
Laura Ronchini
Marco Scaramuzza
Giacomo Sesenna
Nicolò Siligardi
Luca Silvestri
Enza Sorbo
Michela Tiberto
Bryan Emerson Velasquez
Elena Vescovo
Chiarina Gabriela Viceconte
Luisa Vignati
Jaime Alberto Villada Pastor
Alessandro Villaggi
Ivan Vitali
Björn Wienand
Alberto Zanardi
Davide Zanoni

Thanks to:

Luigi Coppola
Danord
Donatella Nalio
Daniele Sprega
Franco Tagliaferri
Alberto Zattin

Photos:

Fausto Mazza

Niccolò Biddau
Alessandro Carra
Fabrizio Cicconi
Diego Cuoghi
Nelson Garrido
LineArchitects
Nacása & Partners Inc.
Thomas Pagani
Iacopo Pasqui

davidegroppi.com

Davide Groppi s.r.l.
Via Belizzi 20 / 22
29122 Piacenza - Italia
+39.0523.571590
info@davidegroppi.com

Davide Groppi s.r.l. © 2025
Company with sole shareholder under the direction and coordination of Dexelance s.p.a.