

davide groppi

NOUVEAUTÉS 2023

/ **Nouveautés 2023**

J'aime penser à nos lampes comme à de petites inventions capables, avec beaucoup de simplicité, d'émouvoir et de surprendre. Et, chaque fois, le but de ma recherche est de démontrer quelque chose de nouveau, de jamais vu précédemment. C'est avec ces sentiments que j'ai créé et sélectionné une nouvelle collection de lampes.

I like to think of our lamps as small and very simple inventions that thrill and surprise. And each time, the aim of my research is to demonstrate something new, never seen before. These are the sentiments I used to create and select a new collection of lamps.

INDEX

ASINTOTO	7
UTOPIA	13
AURORA	25
COLIBRÌ	31
MAGIA	41
SOTTILE	47
SOTTOSOPRA	53
LOUIS XIV	59
VIS À VIS	65
POST PRANDIUM	71
JUST LIKE A LIGHT	77
NUIT	83
BUIO	89
HAZARD	97

La réduction ponctuelle d'Infinito.
Abstraction, pureté, signe graphique.
Éteint, le disque apparaît énigmatique, présence symbolique de l'absence
de lumière.

The projected reduction of Infinito.
Abstraction, purity, graphic sign.
Switched off, the disc appears enigmatic, the symbolic presence of the
absence of light.

ASINTOTO
Davide Groppi, 2023





ASINTOTO

Finish	Gravity black
Mounting	Suspension
Environment	Indoor
CCT- System flux	2700K ~ 2610 lm 3000K ~ 2680 lm
CRI	>80

Insulation class	III
Power	18 W LED
LED current	500 mA DC
Driver	Remote
Remote dimming type	DALI - PUSH** - 1-10 V** - TRIAC*

*TRIAC version not available for US and CN market
**PUSH and 1-10 V versions not available for CN market

CE  IP20

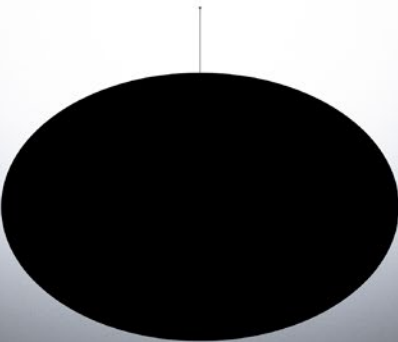

ASINTOTO


ASINTOTO

		Global code	US code	CN code
Asintoto - Gravity black	2700K - CLIII	1A4072700.27.20	1A4072703.27.20	1A4072708.27.20
Asintoto - Gravity black	3000K - CLIII	1A4072700.30.20	1A4072703.30.20	1A4072708.30.20


Electrical power supply		Global code	US code	CN code
Driver	DALI	1Z0241180.500	-	-
Driver	PUSH - 1-10 V	1Z0240870.500	-	-
Driver	TRIAC	1Z0240850.500	-	-
Driver	DALI - PUSH - 1-10 V	-	1Z024053.500	-
Driver	DALI	-	-	1Z0241140.500

Accessories		Global code	US code	CN code
Circular panel for plasterboard		1A4520000.00.00	1A4520000.00.00	1A4520000.00.00
Ceiling rose - Matt white		1A4570300.00.00	1A4570300.00.00	1A4570300.00.00

Installation on plasterboard - Circular panel accessory

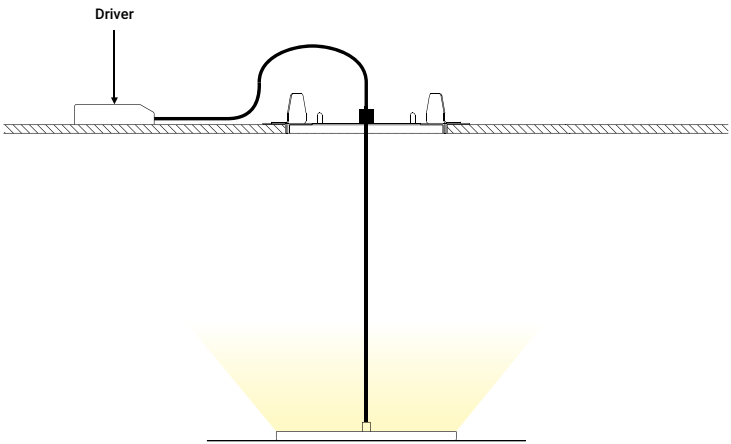

Installation on plaster - Small ceiling rose accessory

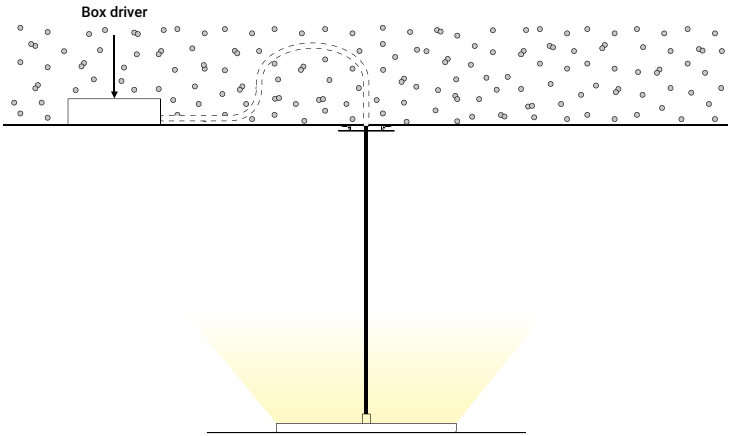


Utopia est un projet sur l'état limite de la lumière, à la recherche de la dimension minimale nécessaire pour éclairer d'une façon pure et essentielle. Elle représente la flexibilité maximale, tant dans le dessin de la ligne que dans la gestion de la lumière.

Le ruban lumineux s'étend dans l'espace, en se pliant, en s'interrompant, en dessinant des graphes abstraits et mystérieux.

Utopia is a project on the limit state of light, the research for the minimum dimension necessary for pure and essential lighting. It represents full flexibility, in both its design and its light control.

The light strip reaches into space, bending, breaking and drawing abstract, mysterious patterns.

UTOPIA
Davide Groppi, 2023

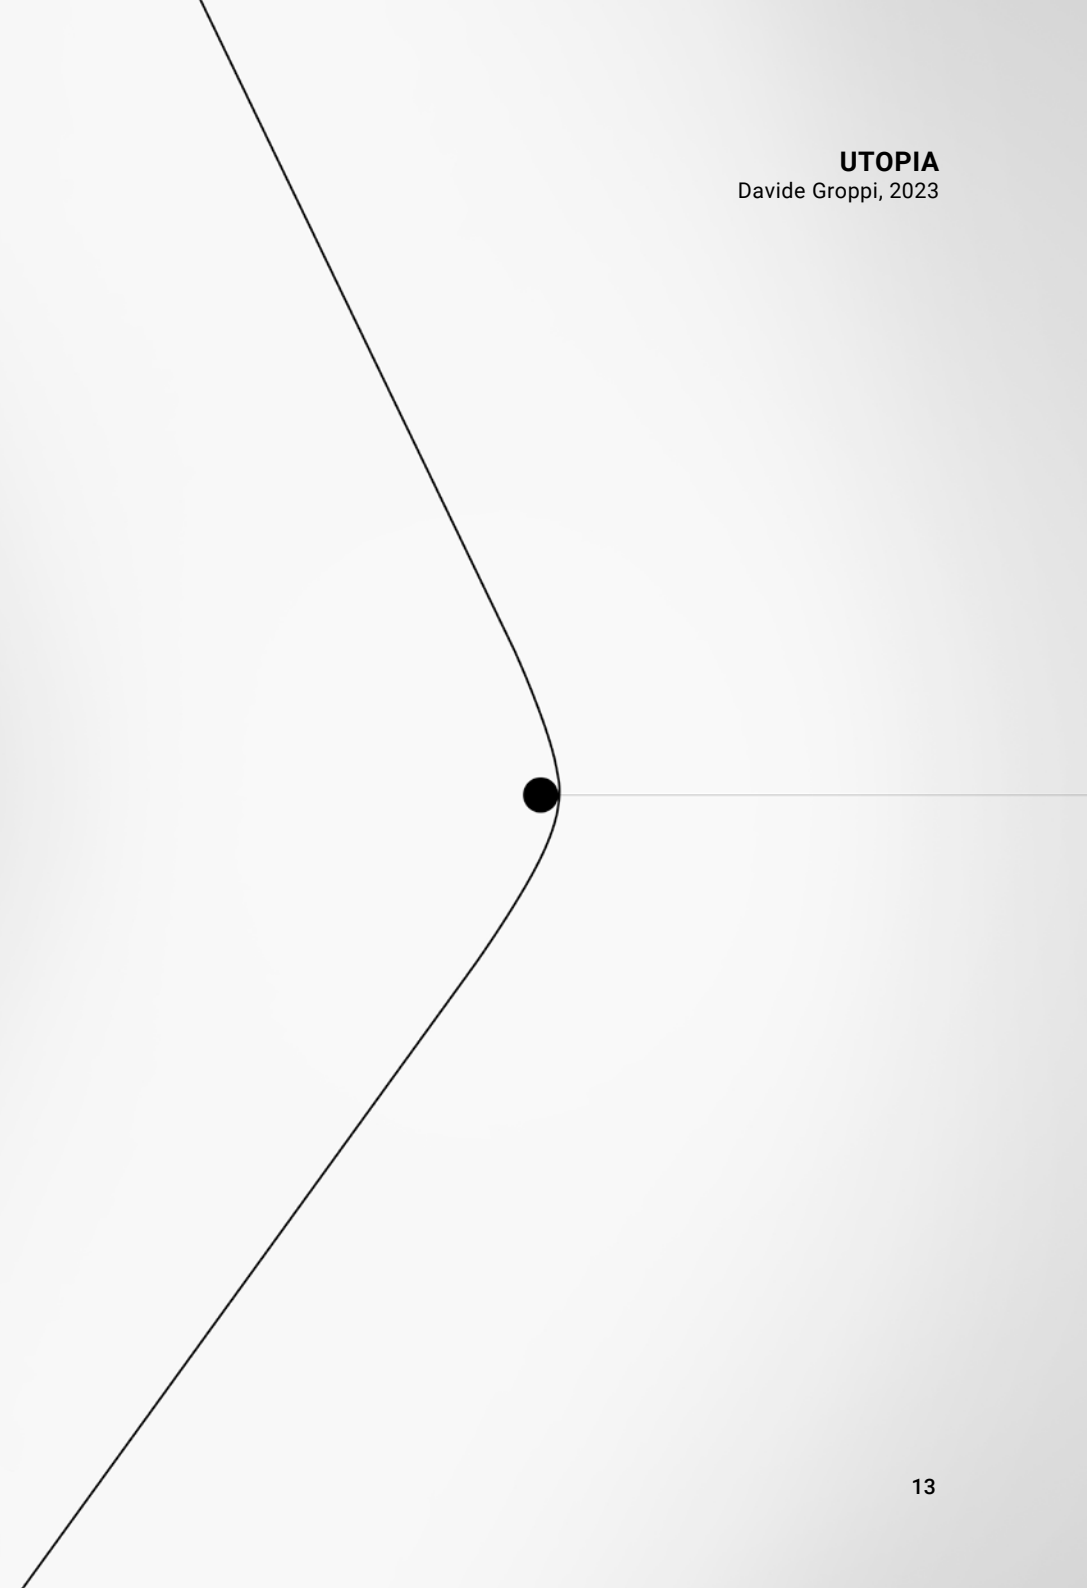



UTOPIA

Finish	Standard
Mounting	Wall / Ceiling
Environment	Indoor

UTOPIA 6

Insulation class	III
Main voltage	24 V DC
Power	78 W LED
CCT- System flux	2700K ~ 6600 lm 3000K ~ 7050 lm
CRI	80
Driver	Power kit with plug Remote




Remote dimming type	Dimmer on board* DALI - PUSH - 1-10 V - TRIAC
---------------------	--

UTOPIA 12

Insulation class	III
Main voltage	24 V DC
Power	156 W LED
CCT- System flux	2700K ~ 13200 lm 3000K ~ 14100 lm
CRI	80
Driver	Power kit with plug Remote

Remote dimming type	Dimmer on board* DALI - PUSH - 1-10 V - TRIAC
---------------------	--

*Dimmer on board version not available for CN market

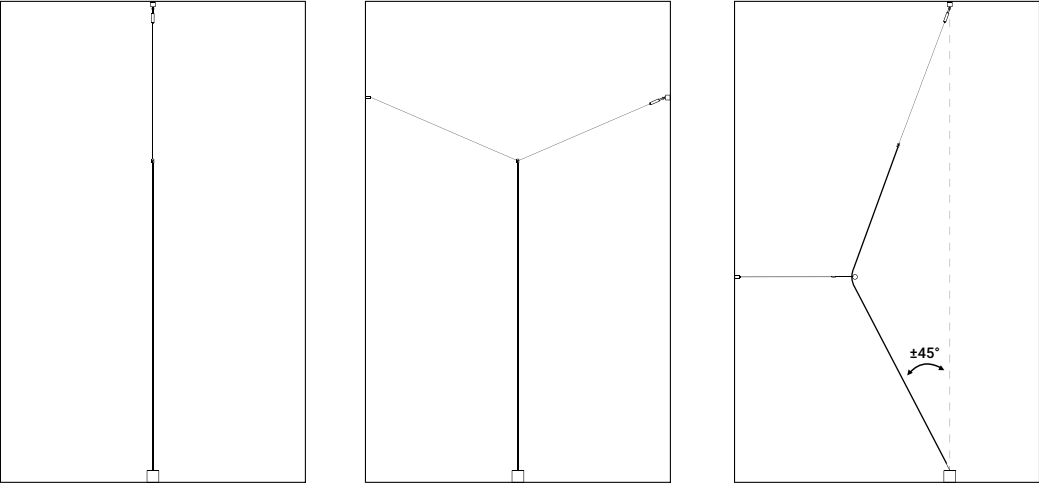

UTOPIA


UTOPIA

		Global code	US code	CN code
Utopia 6	2700K - CLIII	1A4250000.27.20	1A4250003.27.20	1A4250008.27.20
Utopia 6	3000K - CLIII	1A4250000.30.20	1A4250003.30.20	1A4250008.30.20
Utopia 12	2700K - CLIII	1A4600000.27.20	1A4600003.27.20	1A4600008.27.20
Utopia 12	3000K - CLIII	1A4600000.30.20	1A4600003.30.20	1A4600008.30.20

Electrical power supply		Global code	US code	CN code
Utopia 6 - Driver	24V - 100W - IP67 - 1-10V	1Z1120540	1Z1120540	1Z1120540
Utopia 12 - Driver	24V - 200W - IP67 - 1-10V	1Z1120140	-	1Z1120140
Utopia 12 - Driver	24V - 100W - IP67 - 1-10V	-	1Z1120540	-
Utopia - Controller	DALI - PUSH - 1-10 V - TRIAC	1Z2170010	1Z0000034	1Z0000034
Utopia 6 - PKWP size 1 - Matt white	Dimmer on board	1A4500300.00.06	1A4500303.00.06	-
Utopia 6 - PKWP size 1 - Matt black	Dimmer on board	1A4500400.00.06	1A4500403.00.06	-
Utopia 12 - PKWP size 2 - Matt white	Dimmer on board	1A4610300.00.06	1A4610303.00.06	-
Utopia 12 - PKWP size 2 - Matt black	Dimmer on board	1A4610400.00.06	1A4610403.00.06	-

Accessories		Global code	US code	CN code
Accessory 1 - Polished chrome	Cable lock	1A4480100.00.00	1A4480100.00.00	1A4480100.00.00
Accessory 2 - Polished chrome	Side sheet + Cable lock	1A4490100.00.00	1A4490100.00.00	1A4490100.00.00


Possibility to "bend" Utopia both on the right and on the left

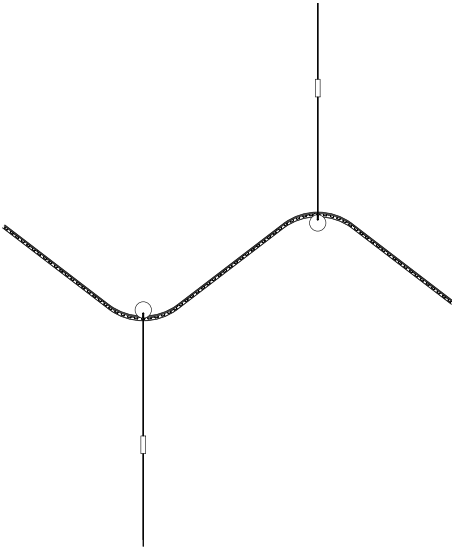

Accessory 1

Accessory 2

UTOPIA

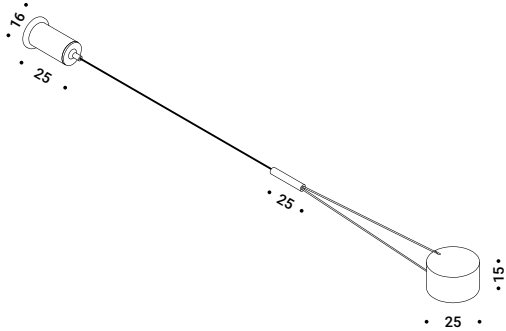



UTOPIA



Un disque blanc, représentation parfaite de la lumière diffuse.
Il peut être appliqué au plafond ou au mur et il est modulable dans toutes les intensités.

A white disc, the perfect representation of diffused light.
Can be mounted on the wall or ceiling, with modular brightness.

AURORA
Davide Groppi, 2023




AURORA

Lamp not available for US and CN market.

Finish	Matt white Matt black Copper oxide
Mounting	Wall / Ceiling
Environment	Indoor
CCT- System flux	3000K ~ 2700 lm
CRI	80

Insulation class	I
Frequency	50/60 Hz
Main voltage	110-240 V
Power	28 W LED
Driver	Integrated
Dimming type	DALI - PUSH - 1-10 V

CE IP20



AURORA

		Global code	US code	CN code
Aurora - Matt white	3000K - DALI - PUSH - 1-10 V	1A4010300.30.07	-	-
Aurora - Matt black	3000K - DALI - PUSH - 1-10 V	1A4010400.30.07	-	-
Aurora - Copper oxide	3000K - DALI - PUSH - 1-10 V	1A4013200.30.07	-	-



Un système à rail réduit au maximum, avec de minuscules corps lumineux, tels de petits Colibri qui se posent là où cela est nécessaire.

A minimal track system with tiny lights, small hummingbirds that perch where needed.

COLIBRÌ
Davide Groppi, 2023




COLIBRÌ

Lamp not available for US and CN market.

Finish	Matt black
Mounting	Wall / Ceiling
Environment	Indoor


COLIBRÌ 18

Insulation class	III
Main voltage	48 V DC
Power	2,5 W LED
Beam	15° - 30°
CCT- System flux	2700K ~ 90 lm - 94 lm 3000K ~ 99 lm - 103 lm
CRI	>90
Driver	Remote power kit
Remote dimming type	DALI



COLIBRÌ 28


Insulation class	III
Main voltage	48 V DC
Power	3,8 W LED
Beam	16° - 30°
CCT- System flux	2700K ~ 187 lm - 192 lm 3000K ~ 203 lm - 211 lm
CRI	>90
Driver	Remote power kit
Remote dimming type	DALI





		Global code	US code	CN code
Colibri 18 - Beam 15° - Matt black	2700K - DALI	1A4260400.27.01	-	-
Colibri 18 - Beam 15° - Matt black	3000K - DALI	1A4260400.30.01	-	-
Colibri 18 - Beam 30° - Matt black	2700K - DALI	1A4270400.27.01	-	-
Colibri 18 - Beam 30° - Matt black	3000K - DALI	1A4270400.30.01	-	-
Colibri 28 - Beam 16° - Matt black	2700K - DALI	1A4280400.27.01	-	-
Colibri 28 - Beam 16° - Matt black	3000K - DALI	1A4280400.30.01	-	-
Colibri 28 - Beam 30° - Matt black	2700K - DALI	1A4290400.27.01	-	-
Colibri 28 - Beam 30° - Matt black	3000K - DALI	1A4290400.30.01	-	-


Electrical power supply		Global code	US code	CN code
Driver	Remote power kit - 60 W	1A4170000.19.00	-	-
Driver	Remote power kit - 150 W	1A2810000.11.00	-	-

COLIBRI - System



Track 1 m Track 2 m Track 3 m	Matt white Matt black	
Power connector	Matt black	
Corner joint cover H	Matt white Matt black	
Corner joint cover V	Matt white Matt black	
End cap	Matt white Matt black	
Cover 3 m	Matt white Matt black	
Pendant gripper	Standard	
Pendant gripper screw	Standard	
Pendant short bracket	Matt white Matt black	
Pendant long bracket	Matt white Matt black	
L-joint	Matt black	
L-feed ceiling wall	Matt black	

Flexible joint	Matt black	
Joining connector	Matt black	
Locking tool for PVC	Standard	
Endless adapter	Standard	

COLIBRI - Recessed system


Track 1 m Track 2 m Track 3 m	Matt black	
Power connector	Matt black	
End cap	Matt black	
Cover 1 m Cover 2 m Cover 3 m	Matt white Matt black	
Template for track	Standard	

Drivers

Driver	Remote power kit - 60 W	
Driver	Remote power kit - 150 W	

COLIBRI - System


Accessories	Global code	US code	CN code
Track 1 m - Matt white	1A4170300.01.00	-	-
Track 1 m - Matt black	1A4170400.01.00	-	-
Track 2 m - Matt white	1A4170300.02.00	-	-
Track 2 m - Matt black	1A4170400.02.00	-	-
Track 3 m - Matt white	1A4170300.03.00	-	-
Track 3 m - Matt black	1A4170400.03.00	-	-
Power connector - Matt black	1A4170400.04.00	-	-
Corner joint cover H - Matt white	1A4170300.05.00	-	-
Corner joint cover H - Matt black	1A4170400.05.00	-	-
Corner joint cover V - Matt white	1A4170300.06.00	-	-
Corner joint cover V - Matt black	1A4170400.06.00	-	-
End cap - Matt white	1A4170300.07.00	-	-
End cap - Matt black	1A4170400.07.00	-	-
Cover 3 m - Matt white	1A4170300.08.00	-	-
Cover 3 m - Matt black	1A4170400.08.00	-	-
Pendant gripper	1A4170000.09.00	-	-
Pendant gripper screw	1A4170000.10.00	-	-
Pendant short bracket - Matt white	1A4170300.11.00	-	-
Pendant short bracket - Matt black	1A4170400.11.00	-	-
Pendant long bracket - Matt white	1A4170300.12.00	-	-
Pendant long bracket - Matt black	1A4170400.12.00	-	-
L-joint - Matt black	1A4170400.13.00	-	-
L-feed ceiling wall - Matt black	1A4170400.14.00	-	-
Flexible joint - Matt black	1A4170400.15.00	-	-
Jointing connector - Matt black	1A4170400.16.00	-	-
Locking tool for PVC	1A4170000.17.00	-	-
Endless adapter	1A4170000.20.00	-	-

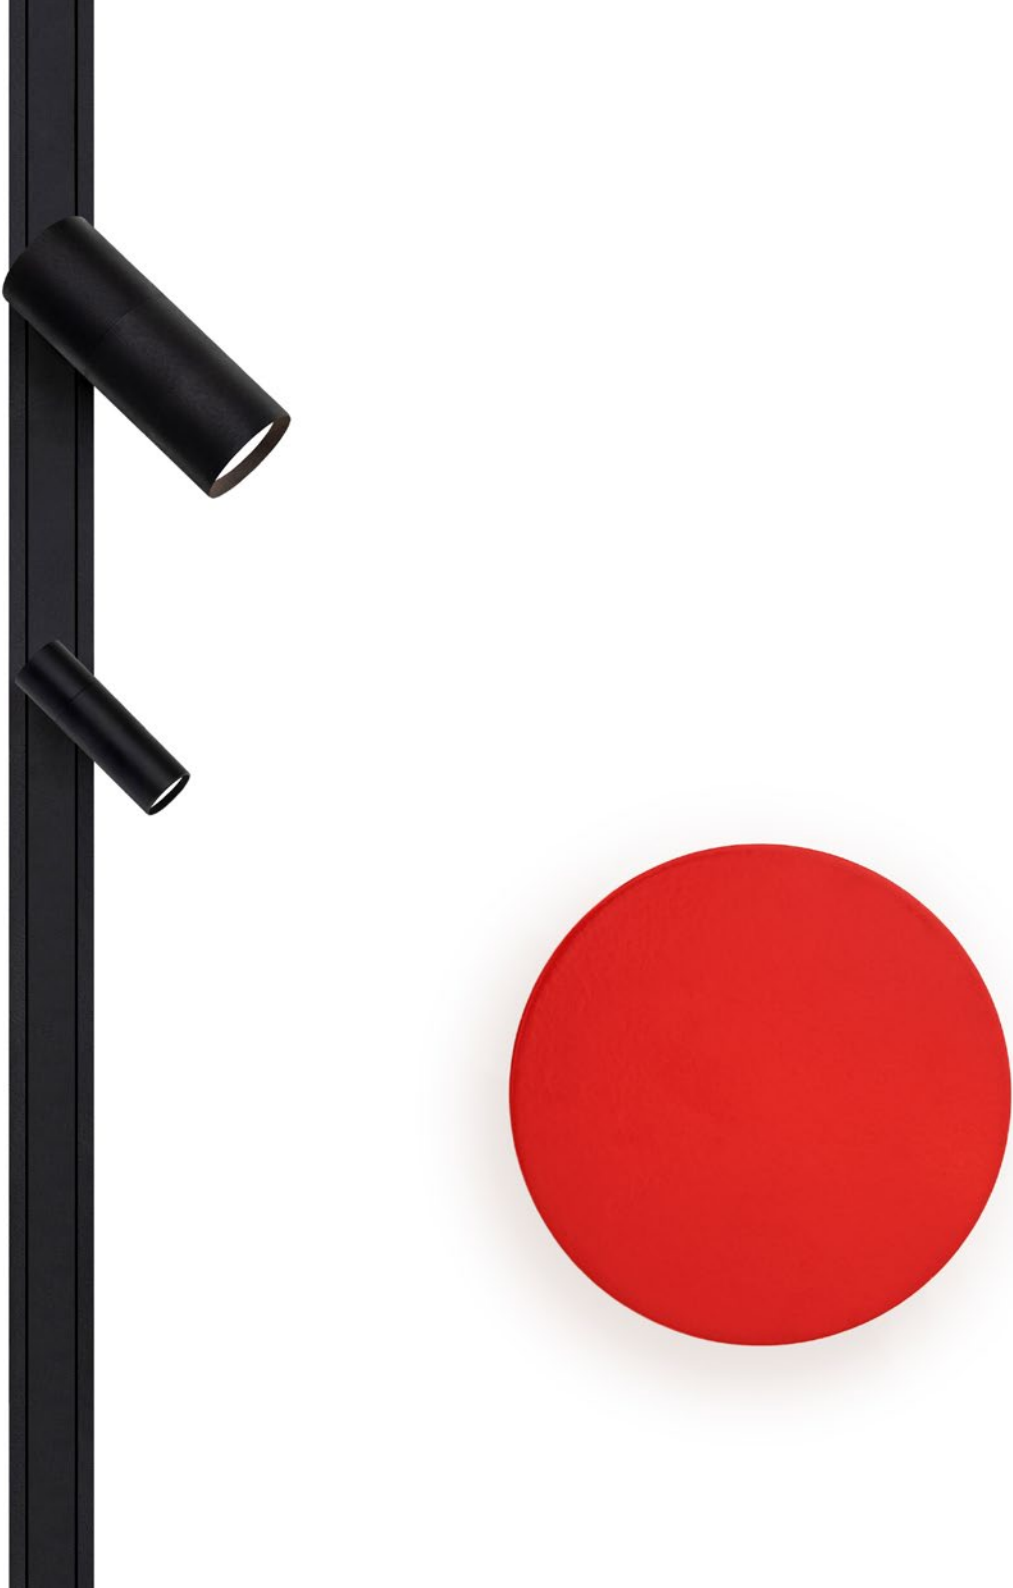

COLIBRI

COLIBRÌ - Recessed system

Accessories	Global code	US code	CN code
Track 1 m - Matt black	1A4180400.01.00	-	-
Track 2 m - Matt black	1A4180400.02.00	-	-
Track 3 m - Matt black	1A4180400.03.00	-	-
Power connector - Matt black	1A4180400.04.00	-	-
End cap - Matt black	1A4180400.05.00	-	-
Cover 1 m - Matt white	1A4180300.06.00	-	-
Cover 1 m - Matt black	1A4180400.06.00	-	-
Cover 2 m - Matt white	1A4180300.07.00	-	-
Cover 2 m - Matt black	1A4180400.07.00	-	-
Cover 3 m - Matt white	1A4180300.08.00	-	-
Cover 3 m - Matt black	1A4180400.08.00	-	-
Template for track	1A4180000.09.00	-	-

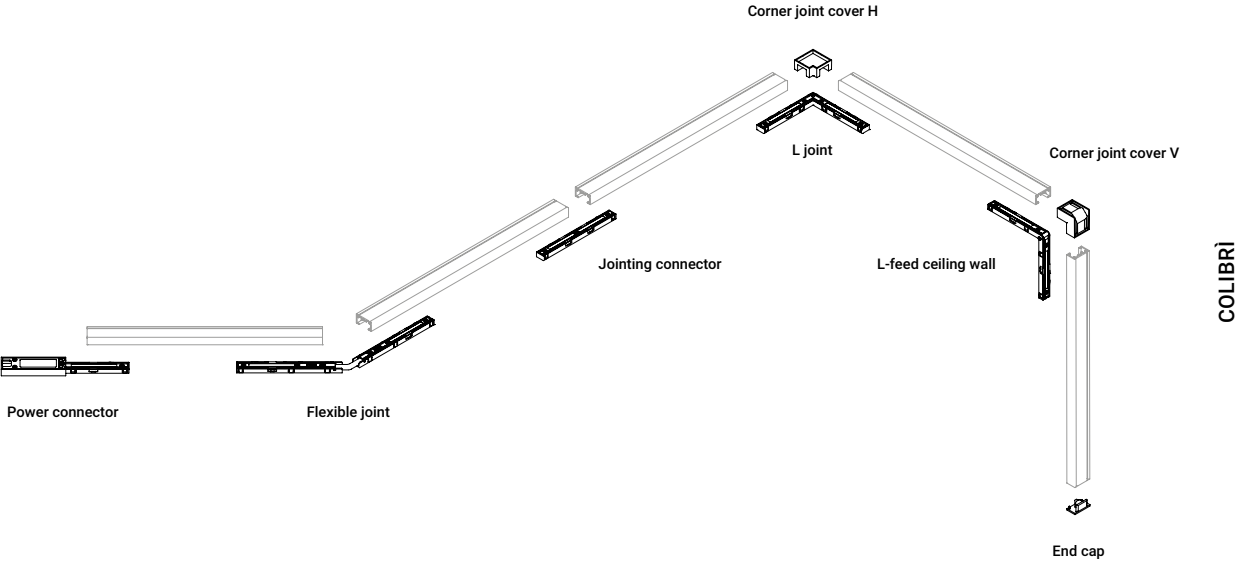

COLIBRÌ

Depuis toujours nous aimons penser d’une façon hérétique, en évoquant le mystère, la magie et la séduction.

Dans ce cas, la lentille n’est pas utilisée pour concentrer, mais pour modifier la vision et la perception de l’objet.

L’effet de la lentille convexe permet de dissimuler la partie émettrice de la lumière et produit un très léger effet de suspension et d’inconsistance. La lumière et la transparence sont les véritables protagonistes de ce projet.

We have always liked to think heretically, evoking mystery, magic and seduction.


In this case, the lens is not used to focus, but to modify the vision and perception of the object.

The effect of the convex lens conceals the part of the light beam and produces the lightest effect of suspension and inconsistency.

Light and transparency are the true stars of this project.

MAGIA

Michele Groppi, 2023

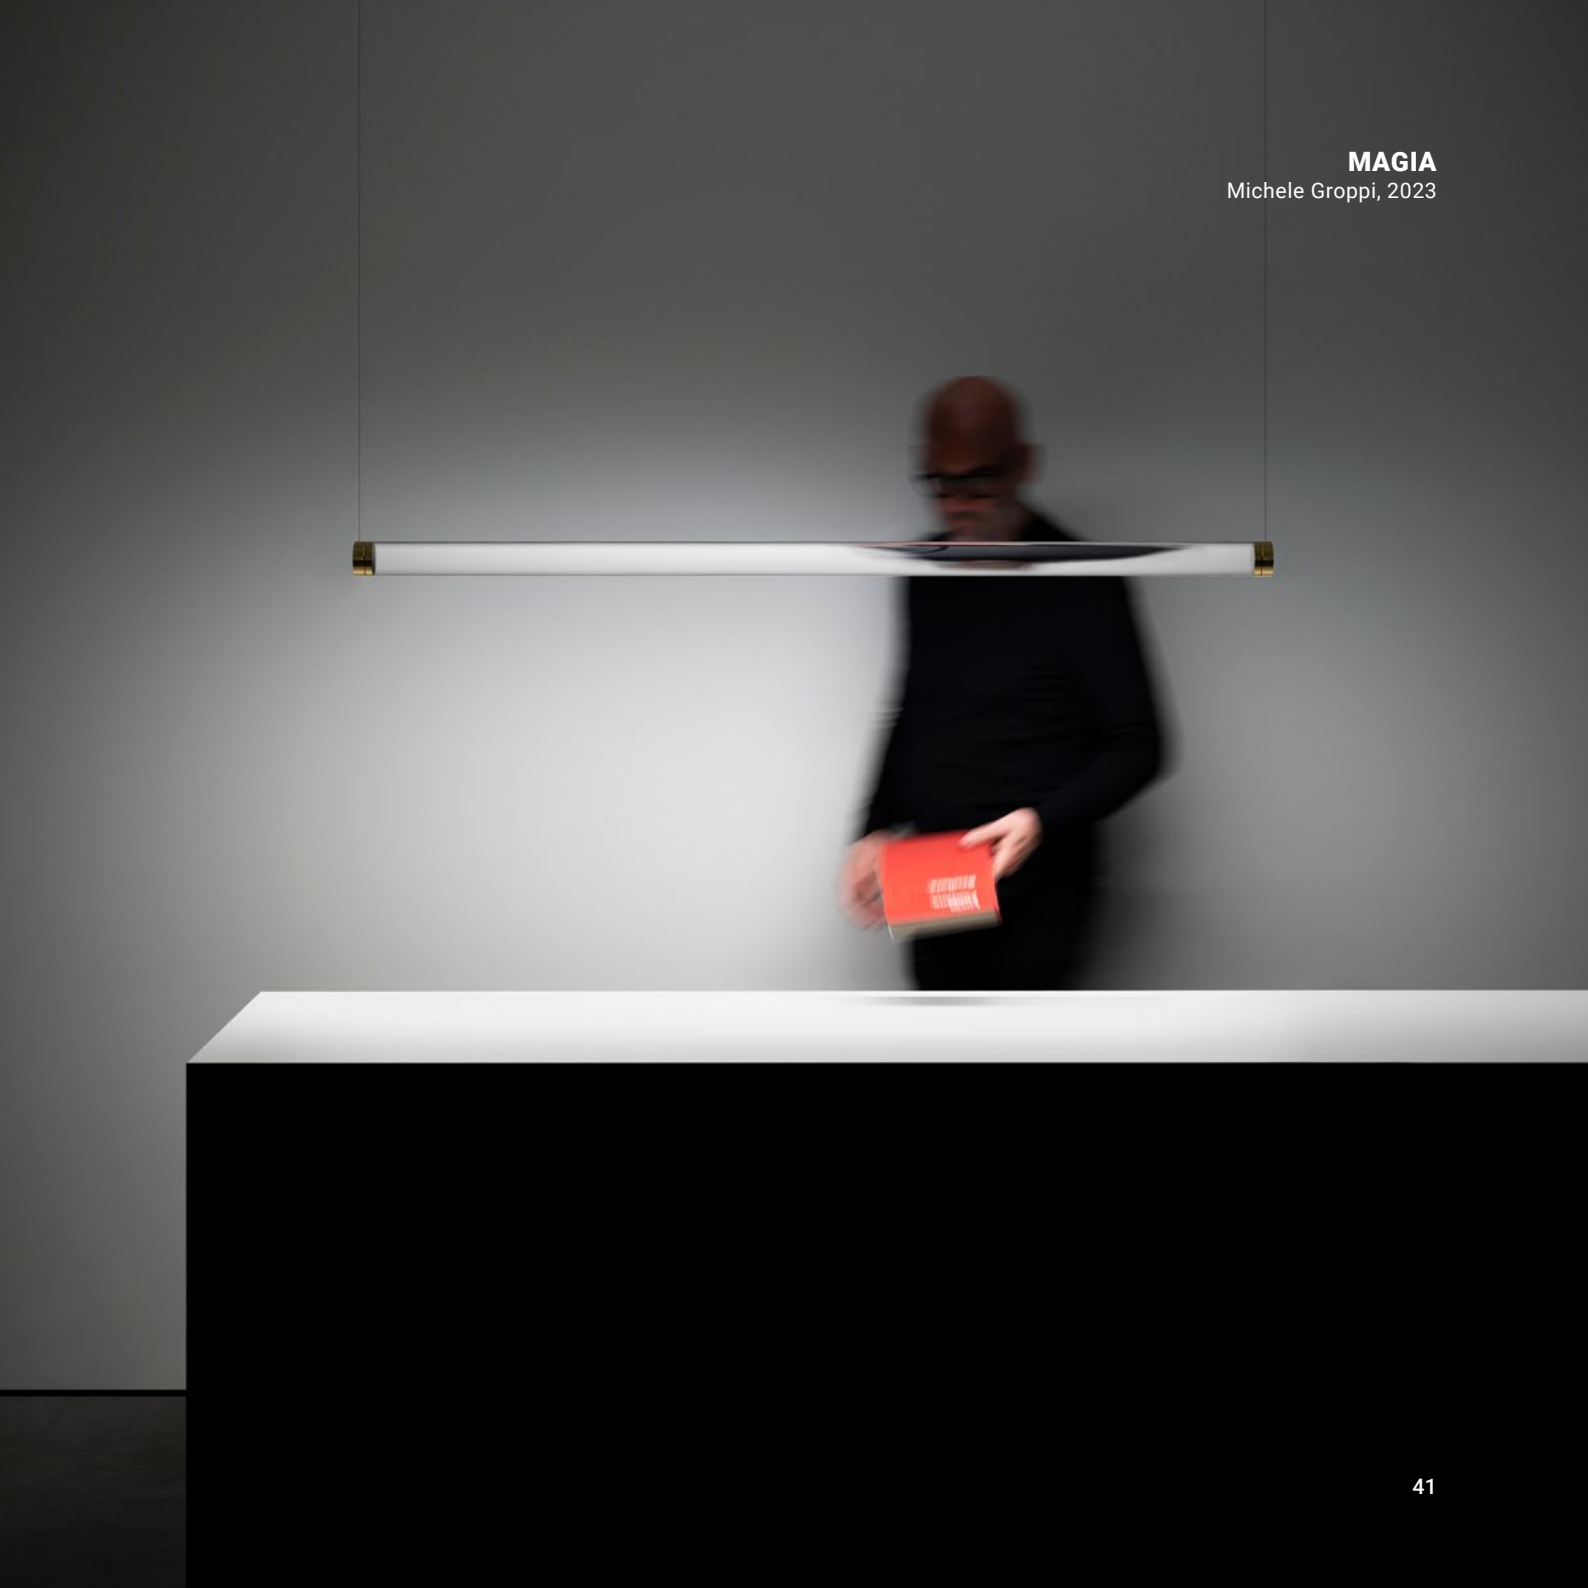

MAGIA

MAGIA 1 not available for CN market.

Finish	Polished gold Polished black chrome
Mounting	Suspension
Environment	Indoor
CCT- System flux	2700K ~ 1770 lm 3000K ~ 1950 lm
CRI	90
Configuration	Max 3 modules

MAGIA 1




Insulation class	I
Frequency	50/60 Hz
Main voltage	110-240 V
Power	22 W LED
Driver	Integrated
Dimming type	DALI - PUSH - 1-10 V - TRIAC*

MAGIA 2

Insulation class	III
Main voltage	24 V DC
Power	19 W LED
Driver	Remote
Remote dimming type	DALI - PUSH - 1-10 V - TRIAC

*TRIAC version not available for US market

CE IP20

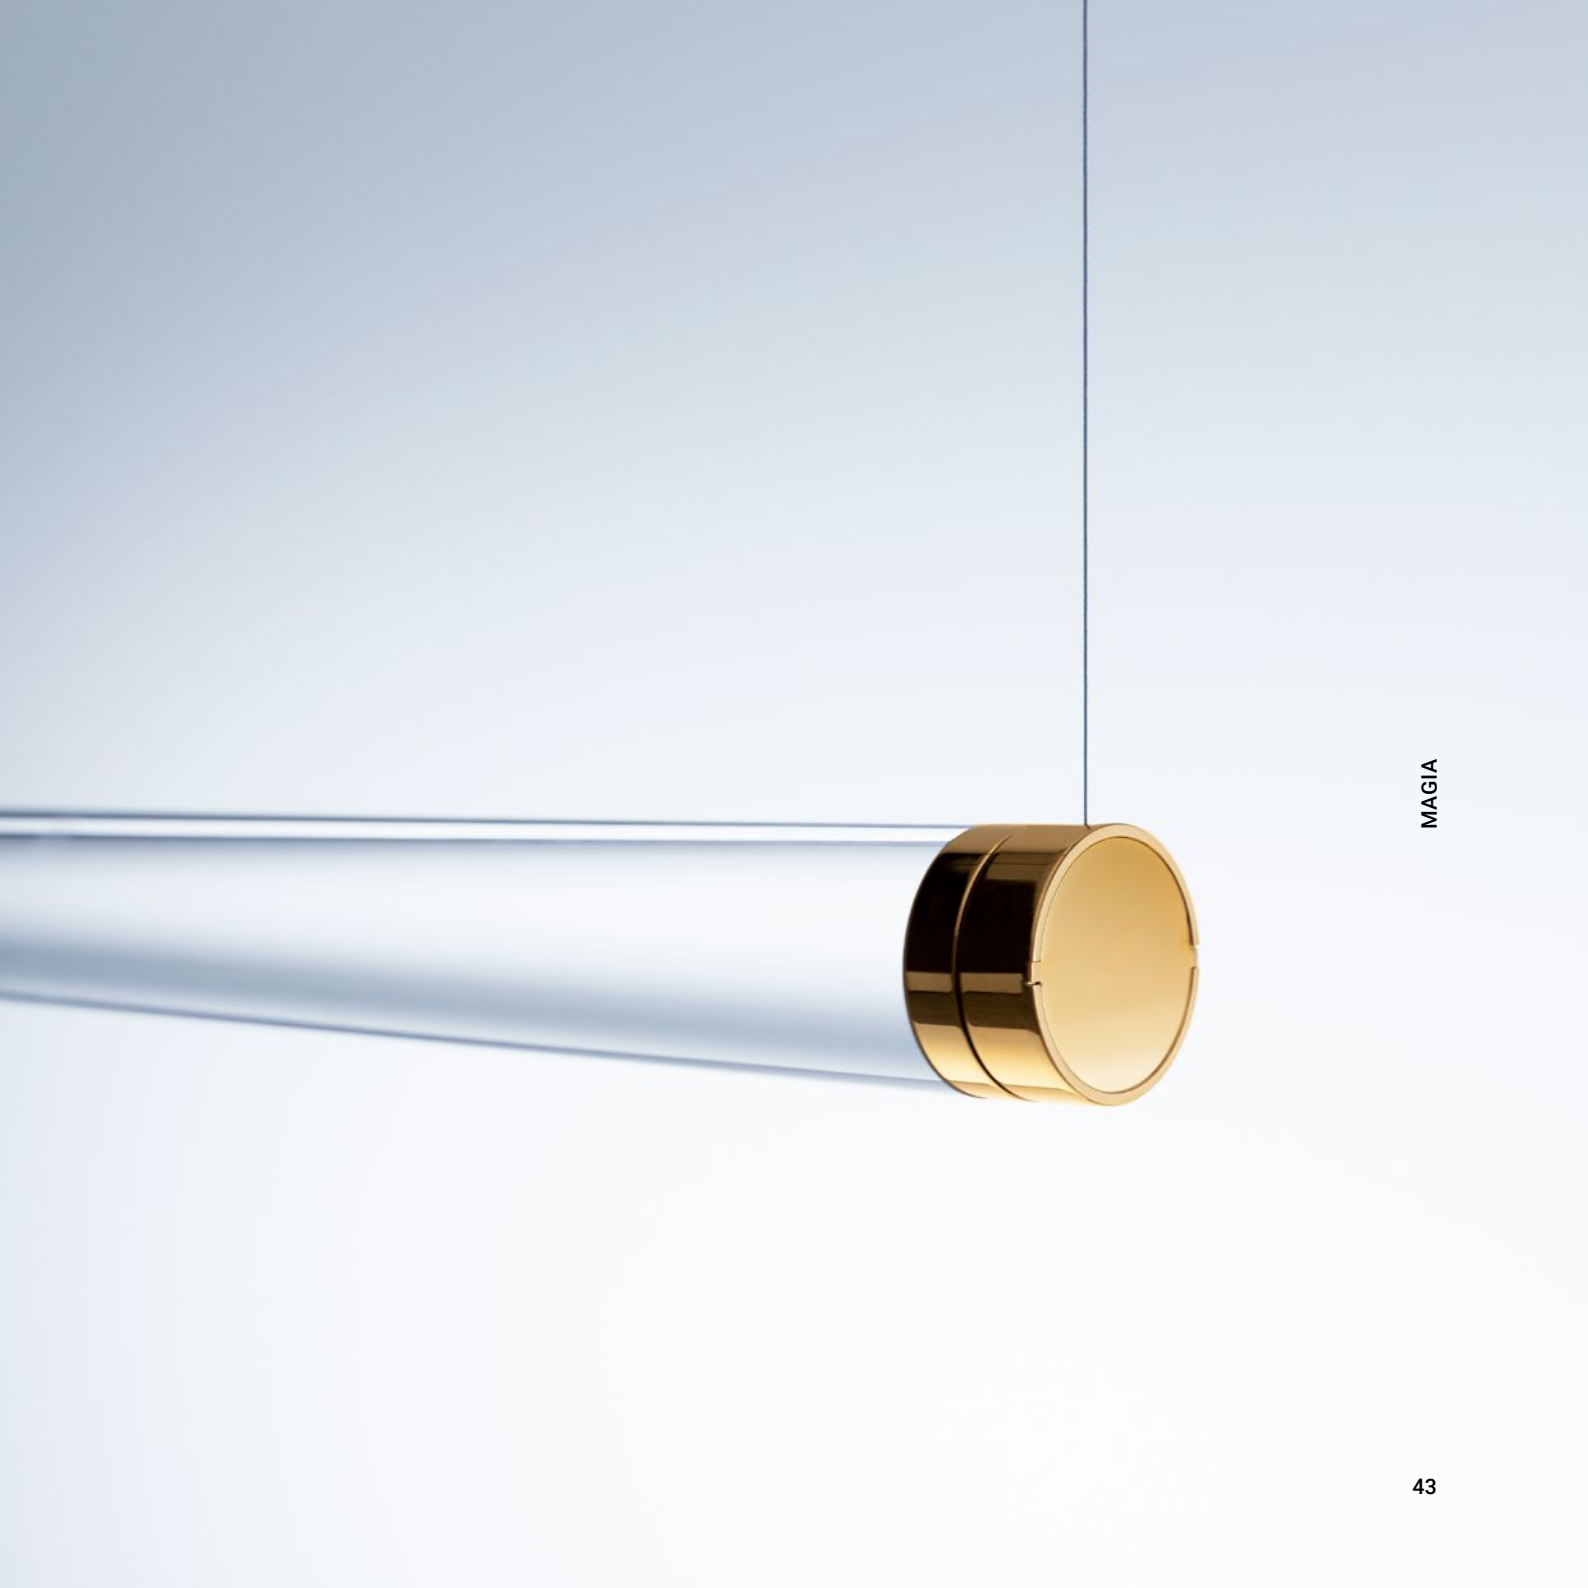

MAGIA


MAGIA

		Global code	US code	CN code
Magia 1 - Polished gold	2700K - DALI - PUSH - 1-10 V - TRIAC	1A4201900.27.05	-	-
Magia 1 - Polished gold	3000K - DALI - PUSH - 1-10 V - TRIAC	1A4201900.30.05	-	-
Magia 1 - Polished black chrome	2700K - DALI - PUSH - 1-10 V - TRIAC	1A4202800.27.05	-	-
Magia 1 - Polished black chrome	3000K - DALI - PUSH - 1-10 V - TRIAC	1A4202800.30.05	-	-
Magia 1 - Polished gold	2700K - DALI - PUSH - 1-10 V	-	1A4201903.27.07	-
Magia 1 - Polished gold	3000K - DALI - PUSH - 1-10 V	-	1A4201903.30.07	-
Magia 1 - Polished black chrome	2700K - DALI - PUSH - 1-10 V	-	1A4202803.27.07	-
Magia 1 - Polished black chrome	3000K - DALI - PUSH - 1-10 V	-	1A4202803.30.07	-
Magia 2 - Polished gold	2700K - CLIII	1A4201900.27.20	1A4201903.27.20	1A4201908.27.20
Magia 2 - Polished gold	3000K - CLIII	1A4201900.30.20	1A4201903.30.20	1A4201908.30.20
Magia 2 - Polished black chrome	2700K - CLIII	1A4202800.27.20	1A4202803.27.20	1A4202808.27.20
Magia 2 - Polished black chrome	3000K - CLIII	1A4202800.30.20	1A4202803.30.20	1A4202808.30.20


Electrical power supply		Global code	US code	CN code
Magia 2 - Driver	24 V - 80 W - IP20 - ON-OFF	1Z1120440	1Z1120440	1Z1120440
Magia 2 - Controller	DALI - PUSH - PHASE CUT - 1-10 V	1Z2170010	1Z0000034	1Z0000034

Accessories		Global code	US code	CN code
Tube - Polished gold	2700K - CLIII	1A4511900.27.20	1A4511903.27.20	1A4511908.27.20
Tube - Polished gold	3000K - CLIII	1A4511900.30.20	1A4511903.30.20	1A4511908.30.20
Tube - Polished black chrome	2700K - CLIII	1A4512800.27.20	1A4512803.27.20	1A4512808.27.20
Tube - Polished black chrome	3000K - CLIII	1A4512800.30.20	1A4512803.30.20	1A4512808.30.20
Magia 1 - Wire guide - Matt black		1A3040400.00.00	1A3040403.00.00	-
Magia 2 - Ceiling rose - Matt white		1A4650300.00.00	1A4650300.00.00	1A4650300.00.00

Possibility to instal up to 3 modules

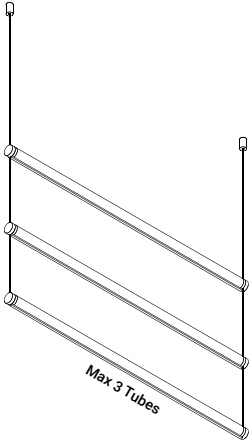

Possibility to rotate the module at 360°

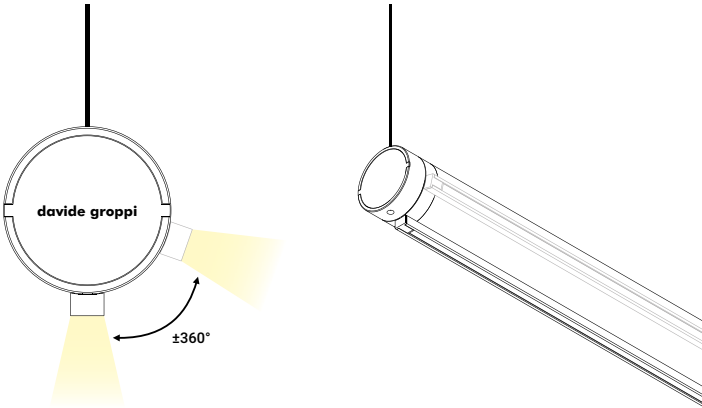

MAGIA

Une lame de lumière de 6 millimètres seulement d'épaisseur, expression d'une partie de notre pensée, celle la plus pure et la plus essentielle. La surprise d'une lampe extrêmement fine mais à la fois lumineuse, un élément de conception rationnel et fonctionnel.

A blade of light just 6 millimetres thick, the expression of that purest and most essential part of our thought. The surprise of an extremely thin, yet at the same time very bright, lamp, an element of a rational, functional project.

SOTTILE
Davide Groppi, 2023



SOTTILE

SOTTILE 1 not available for CN market.

Finish	Matt white Matt black Brushed champagne Brushed black chrome
Mounting	Suspension
Environment	Indoor
CCT- System flux	2700K ~ 1300 lm 3000K ~ 1400 lm
CRI	80

SOTTILE 1



Insulation class	I
Frequency	50/60 Hz
Main voltage	110-240 V
Power	26 W LED
Driver	Integrated
Dimming type	DALI - PUSH - 1-10 V - TRIAC*

SOTTILE 2

Insulation class	III
Main voltage	24 V DC
Power	22 W LED
Driver	Remote
Remote dimming type	DALI - PUSH - 1-10 V - TRIAC

*TRIAC version not available for US market

CE IP20



SOTTILE

SOTTILE

		Global code	US code	CN code
Sottile 1 - Matt white	2700K - DALI - PUSH - 1-10 V - TRIAC	1A4230300.27.05	-	-
Sottile 1 - Matt white	3000K - DALI - PUSH - 1-10 V - TRIAC	1A4230300.30.05	-	-
Sottile 1 - Matt black	2700K - DALI - PUSH - 1-10 V - TRIAC	1A4230400.27.05	-	-
Sottile 1 - Matt black	3000K - DALI - PUSH - 1-10 V - TRIAC	1A4230400.30.05	-	-
Sottile 1 - Brushed champagne	2700K - DALI - PUSH - 1-10 V - TRIAC	1A4232900.27.05	-	-
Sottile 1 - Brushed champagne	3000K - DALI - PUSH - 1-10 V - TRIAC	1A4232900.30.05	-	-
Sottile 1 - Brushed black chrome	2700K - DALI - PUSH - 1-10 V - TRIAC	1A4233600.27.05	-	-
Sottile 1 - Brushed black chrome	3000K - DALI - PUSH - 1-10 V - TRIAC	1A4233600.30.05	-	-
Sottile 1 - Matt white	2700K - DALI - PUSH - 1-10 V	-	1A4230303.27.07	-
Sottile 1 - Matt white	3000K - DALI - PUSH - 1-10 V	-	1A4230303.30.07	-
Sottile 1 - Matt black	2700K - DALI - PUSH - 1-10 V	-	1A4230403.27.07	-
Sottile 1 - Matt black	3000K - DALI - PUSH - 1-10 V	-	1A4230403.30.07	-
Sottile 1 - Brushed champagne	2700K - DALI - PUSH - 1-10 V	-	1A4232903.27.07	-
Sottile 1 - Brushed champagne	3000K - DALI - PUSH - 1-10 V	-	1A4232903.30.07	-
Sottile 1 - Brushed black chrome	2700K - DALI - PUSH - 1-10 V	-	1A4233603.27.07	-
Sottile 1 - Brushed black chrome	3000K - DALI - PUSH - 1-10 V	-	1A4233603.30.07	-
Sottile 2 - Matt white	2700K - CLIII	1A4230300.27.20	1A4230303.27.20	1A4230308.27.20
Sottile 2 - Matt white	3000K - CLIII	1A4230300.30.20	1A4230303.30.20	1A4230308.30.20
Sottile 2 - Matt black	2700K - CLIII	1A4230400.27.20	1A4230403.27.20	1A4230408.27.20
Sottile 2 - Matt black	3000K - CLIII	1A4230400.30.20	1A4230403.30.20	1A4230408.30.20
Sottile 2 - Brushed champagne	2700K - CLIII	1A4232900.27.20	1A4232903.27.20	1A4232908.27.20
Sottile 2 - Brushed champagne	3000K - CLIII	1A4232900.30.20	1A4232903.30.20	1A4232908.30.20
Sottile 2 - Brushed black chrome	2700K - CLIII	1A4233600.27.20	1A4233603.27.20	1A4233608.27.20
Sottile 2 - Brushed black chrome	3000K - CLIII	1A4233600.30.20	1A4233603.30.20	1A4233608.30.20
Electrical power supply		Global code	US code	CN code
Sottile 2 - Driver	24 V - 50 W - IP20 - ON-OFF	1Z1120490	1Z1120490	1Z1120490
Sottile 2 - Controller	DALI - PUSH - PHASE CUT - 1-10 V	1Z2170010	1Z0000034	1Z0000034
Accessories		Global code	US code	CN code
Sottile 2 - Ceiling rose - Matt white		1A4640300.00.00	1A4640300.00.00	1A4640300.00.00



SOTTILE

La pureté du cône suspendu renferme une petite machine de lumière qui produit simultanément de la lumière directe, indirecte et diffuse. Au-dessus de la table, Sottosopra : pure, élégante, merveilleusement efficace.

The purity of the suspended cone encases a small light machine that produces direct, indirect and diffused light at the same time. Above the table, Sottosopra: pure, elegant, wonderfully efficient.

SOTTOSOPRA
Davide Groppi, 2023



SOTTOSOPRA

Dual emission and double switch lamp.
SOTTOSOPRA 1 not available for CN market.

Finish	Matt white Matt black D-Greige
Mounting	Suspension
Environment	Indoor
CCT- System flux	2700K ~ 228 lm (down) - 1827 lm (up) 3000K ~ 245 lm (down) - 1876 lm (up)
CRI	>90 (down) - >80 (up)



SOTTOSOPRA 1

Insulation class	I
Frequency	50/60 Hz
Main voltage	110-240 V
Power	30 W LED
Driver	Integrated
Dimming type	DALI - PUSH - 1-10 V

SOTTOSOPRA 2

Insulation class	III
Main voltage	500 mA DC
Power	30 W LED
Driver	Remote power kit
Remote dimming type	DALI - PUSH - 1-10 V

CE IP20



SOTTOSOPRA

SOTTOSOPRA

		Global code	US code	CN code
Sottosopra 1 - Matt white	2700K - DALI - PUSH - 1-10 V	1A4540300.27.07	1A4540303.27.07	-
Sottosopra 1 - Matt white	3000K - DALI - PUSH - 1-10 V	1A4540300.30.07	1A4540303.30.07	-
Sottosopra 1 - Matt black	2700K - DALI - PUSH - 1-10 V	1A4540400.27.07	1A4540403.27.07	
Sottosopra 1 - Matt black	3000K - DALI - PUSH - 1-10 V	1A4540400.30.07	1A4540403.30.07	
Sottosopra 1 - D-Greige	2700K - DALI - PUSH - 1-10 V	1A4543500.27.07	1A4543503.27.07	-
Sottosopra 1 - D-Greige	3000K - DALI - PUSH - 1-10 V	1A4543500.30.07	1A4543503.30.07	-
Sottosopra 2 - Matt white	2700K - CLIII	1A4540300.27.20	1A4540303.27.20	1A4540308.27.20
Sottosopra 2 - Matt white	3000K - CLIII	1A4540300.30.20	1A4540303.30.20	1A4540308.30.20
Sottosopra 2 - Matt black	2700K - CLIII	1A4540400.27.20	1A4540403.27.20	1A4540408.27.20
Sottosopra 2 - Matt black	3000K - CLIII	1A4540400.30.20	1A4540403.30.20	1A4540408.30.20
Sottosopra 2 - D-Greige	2700K - CLIII	1A4543500.27.20	1A4543503.27.20	1A4543508.27.20
Sottosopra 2 - D-Greige	3000K - CLIII	1A4543500.30.20	1A4543503.30.20	1A4543508.30.20
Electrical power supply		Global code	US code	CN code
Sottosopra 2 - Driver	Remote power kit	1A4620000.00.07	1A4620003.00.07	1A4620008.00.07



SOTTOSOPRA

Du lustre classique en verre, nous avons sauvé les pampilles, grandes, scintillantes, suspendues dans le vide.

Une petite machine lumineuse, avec de la lumière directe et indirecte, multiplie les reflets du verre et crée ainsi un merveilleux effet de magnificence, une transposition contemporaine de Versailles.

From the classic crystal chandelier, we saved the drops, those large, sparkling drops hanging in the air.

A small light machine, with direct and indirect light, multiplies the glass reflections to create a wonderful effect of magnificence, the contemporary transposition of Versailles.

LOUIS XIV

Davide Groppi, 2023



LOUIS XIV (ricordo di un lampadario a gocce)

Dual emission and double switch lamp.
LOUIS XVI 1 not available for CN market.

Finish	Polished gold
Mounting	Suspension
Environment	Indoor
CCT- System flux	2700K ~ 228 lm (down) - 616 lm (up) 3000K ~ 245 lm (down) - 716 lm (up)
CRI	>90



LOUIS XIV 1

Insulation class	I
Frequency	50/60 Hz
Main voltage	110-240 V
Power	14 W LED
Driver	Integrated
Dimming type	DALI - PUSH - 1-10 V

LOUIS XIV 2

Insulation class	III
Main voltage	500 mA DC
Power	14 W LED
Driver	Remote power kit
Remote dimming type	DALI - PUSH - 1-10 V

CE IP20





LOUIS XIV

LOUIS XIV (ricordo di un lampadario a gocce)

		Global code	US code	CN code
Louis XIV 1 - Polished gold	2700K - DALI - PUSH - 1-10 V	1A4361900.27.07	1A4361903.27.07	1A4361908.27.07
Louis XIV 1 - Polished gold	3000K - DALI - PUSH - 1-10 V	1A4361900.30.07	1A4361903.30.07	1A4361908.30.07
Louis XIV 2 - Polished gold	2700K - CLIII	1A4361900.27.20	1A4361903.27.20	1A4361908.27.20
Louis XIV 2 - Polished gold	3000K - CLIII	1A4361900.30.20	1A4361903.30.20	1A4361908.30.20

Electrical power supply		Global code	US code	CN code
Louis XIV 2 - Driver	Remote power kit	1A4630000.00.07	1A4630003.00.07	1A4630008.00.07

Accessories		Global code	US code	CN code
Diamond - 10 drops		1A4580000.00.00	1A4580000.00.00	1A4580000.00.00

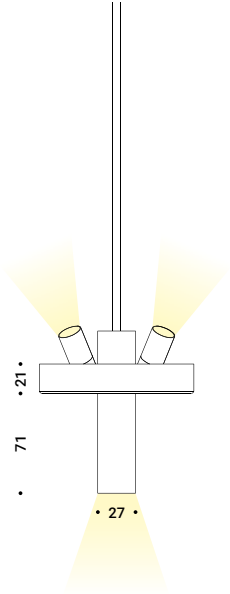

LOUIS XIV

Dix ans après la présentation de notre première lampe à pile, nous avons voulu jeter un nouveau regard sur la lumière sans fil, tout en restant uniques et innovants.

Nous avons pensé, encore une fois, de supprimer en ne recherchant que la lumière.

Le résultat est une lampe transparente, vérité et beauté.

Ten years after the presentation of our first battery lamp, we wanted to add a new idea of wireless light, remaining unique and innovative.

Once again, we decided to take away, seeking only the light.

A transparent lamp was born, truth and beauty.

VIS À VIS
Michele Groppi, 2023




VIS À VIS

Finish	Standard
Mounting	Table - Rechargeable
Environment	Indoor
CCT- System flux	2700K ~ 167 lm 3000K ~ 180 lm
CRI	>90

Insulation class	III
Main voltage	3,7 V DC
Power	2 W LED
LED current	4800 mAh
Battery life	9 hours
Battery type	Li-Poly
Charging socket	USB-C
Charger	Not included
Dimming type	Not dimmable

CE IP20



VIS À VIS

VIS À VIS

		Global code	US code	CN code
Vis à Vis	2700K - ON-OFF	1A4530000.27.00	1A4530003.27.00	1A4530008.27.00
Vis à Vis	3000K - ON-OFF	1A4530000.30.00	1A4530003.30.00	1A4530008.30.00

Accessories		Global code	US code	CN code
Power supply	2000 mA - 10 W - IP20 - ON-OFF	1Z0000088	1Z0000088	1Z0000088
USB to USB-C black cable		1Z0000070	1Z0000070	1Z0000070



Un projet d'il y a de nombreuses années, réédité aujourd'hui en version sans fil.

L'amour pour le ready-made réapparaît parfois, pour satisfaire mon désir profond de dessiner le moins possible, en prenant ce qui existe déjà.

A project from many years ago, today in a new wireless version. The love for the ready-made sometimes resurfaces, to satisfy my profound desire for designing as little as possible, taking what exists already.

POST PRANDIUM

Davide Groppi, 2023




POST PRANDIUM

Finish	Polished chrome
Mounting	Table - Rechargeable
Environment	Indoor
CCT- System flux	3000K ~ 180 lm
CRI	>90

Insulation class	III
Main voltage	3,7 V
Power	2 W LED
LED current	4800 mAh
Battery life	9 hours
Battery type	Li-Poly
Charging socket	USB-C
Charger	Not included
Dimming type	Not dimmable

CE IP20



POST PRANDIUM

POST PRANDIUM

		Global code	US code	CN code
Post Prandium - Polished chrome	3000K - ON-OFF	1A4550100.30.00	1A4550103.30.00	1A4550108.30.00
Accessories		Global code	US code	CN code
Power supply	2000 mA - 10 W - IP20 - ON-OFF	1Z0000088	1Z0000088	1Z0000088
USB to USB-C black cable		1Z0000070	1Z0000070	1Z0000070




POST PRANDIUM

Cinq crocodiles se disputent la lumière.
Je dois parfois laisser courir l'imagination sans penser à savoir si la lampe plaira ou si elle fera de la lumière, en un exercice créatif libre, où les aspects liés à la composition et au fonctionnement deviennent secondaires.
C'est ma méthode pour découvrir de nouvelles formes d'expression, qui mènent à d'agréables surprises, à des découvertes inattendues, à des souvenirs nostalgiques.
Just like a light, un hommage à une référence éternelle.

Five crocodiles compete for the light.
Sometimes I have to let my imagination run without thinking if people will like the lamp or if it will create light, in a free, creative exercise where the compositional and functional aspects become secondary.
This is my way of discovering new forms of expression, which lead to pleasant surprises, unexpected discoveries, nostalgic memories.
Just like a light, a homage to an eternal point of reference.

JUST LIKE A LIGHT
Davide Groppi, 2023


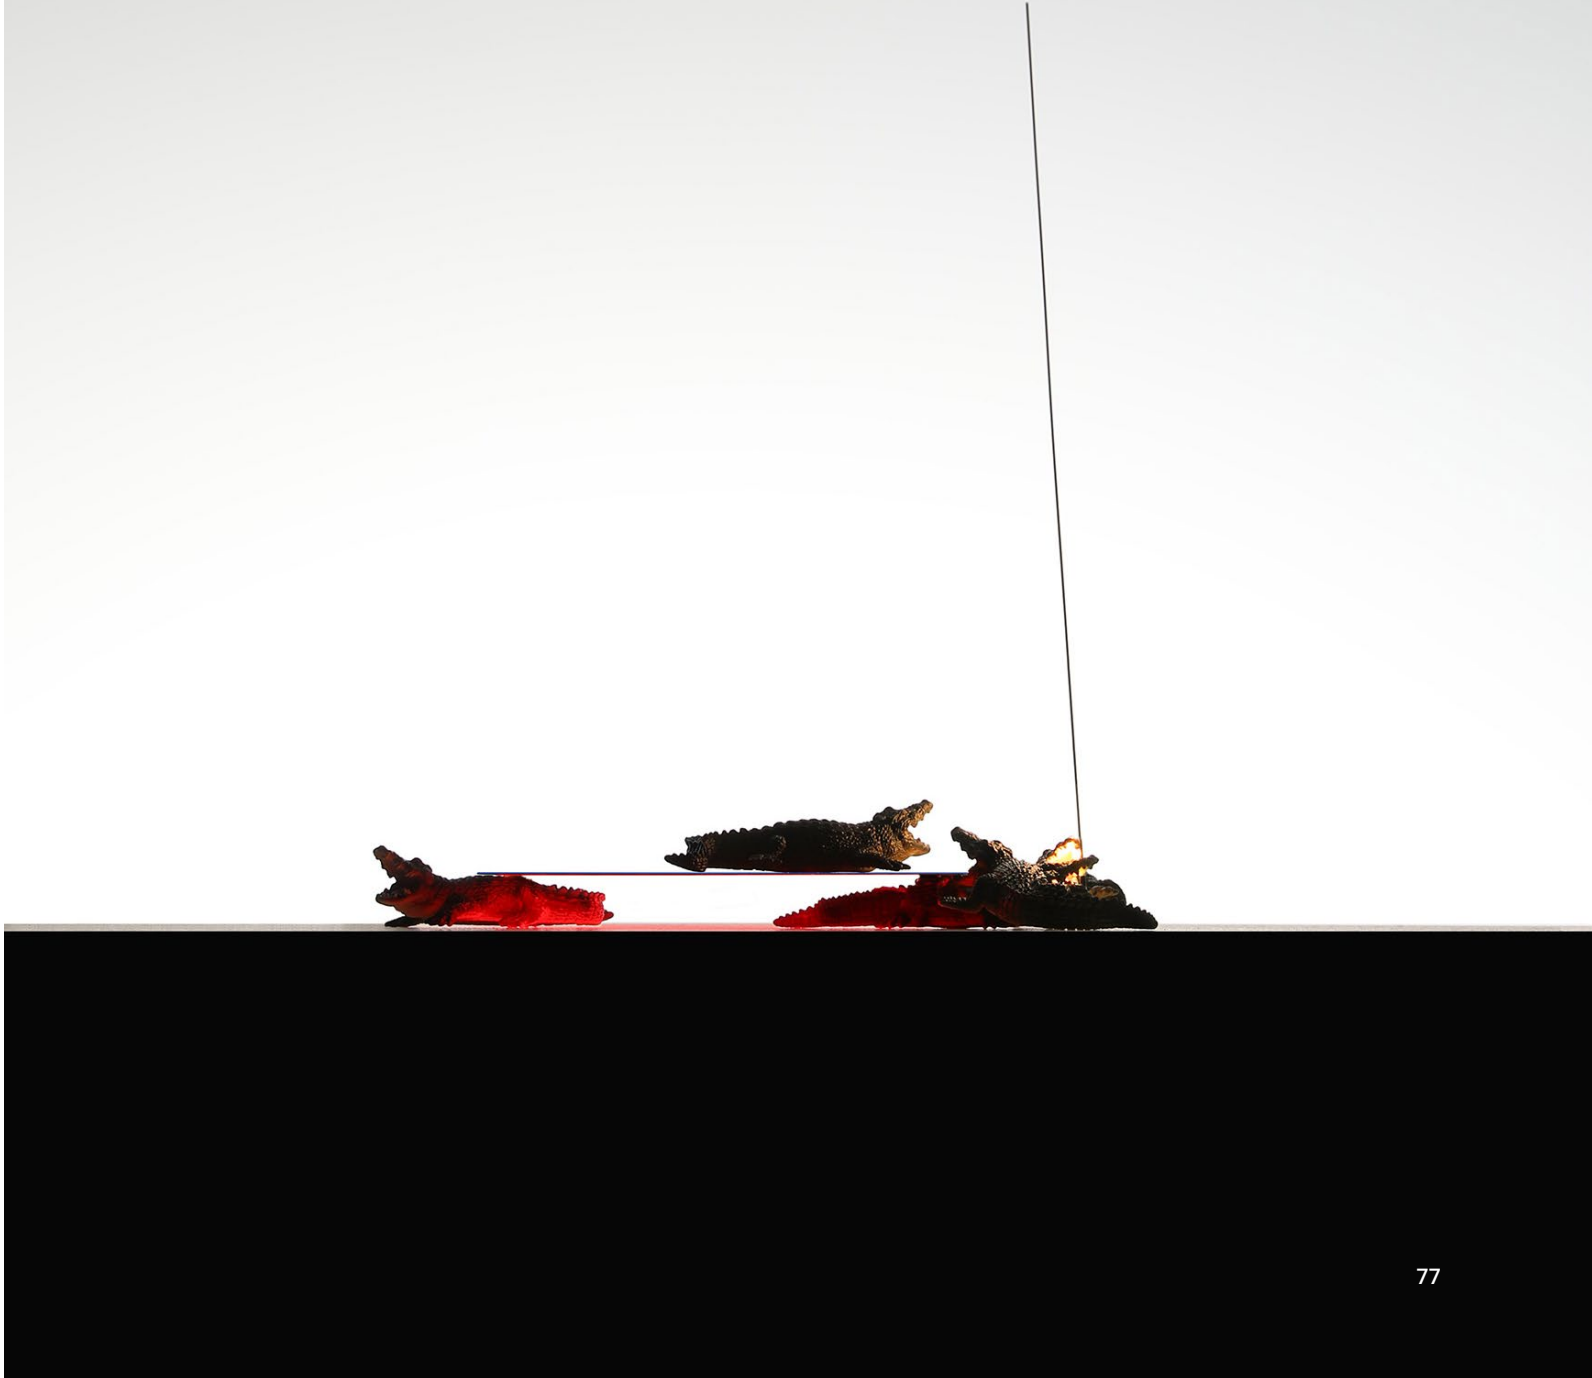


JUST LIKE A LIGHT (omaggio non dichiarato)

Lamp not available for US and CN market.

Finish	Standard
Mounting	Table
Environment	Indoor
Insulation class	III
Frequency	50/60 Hz
Main voltage	110-240 V
Driver	Indipendent
Dimming type	Dimmer on board


CE IP20

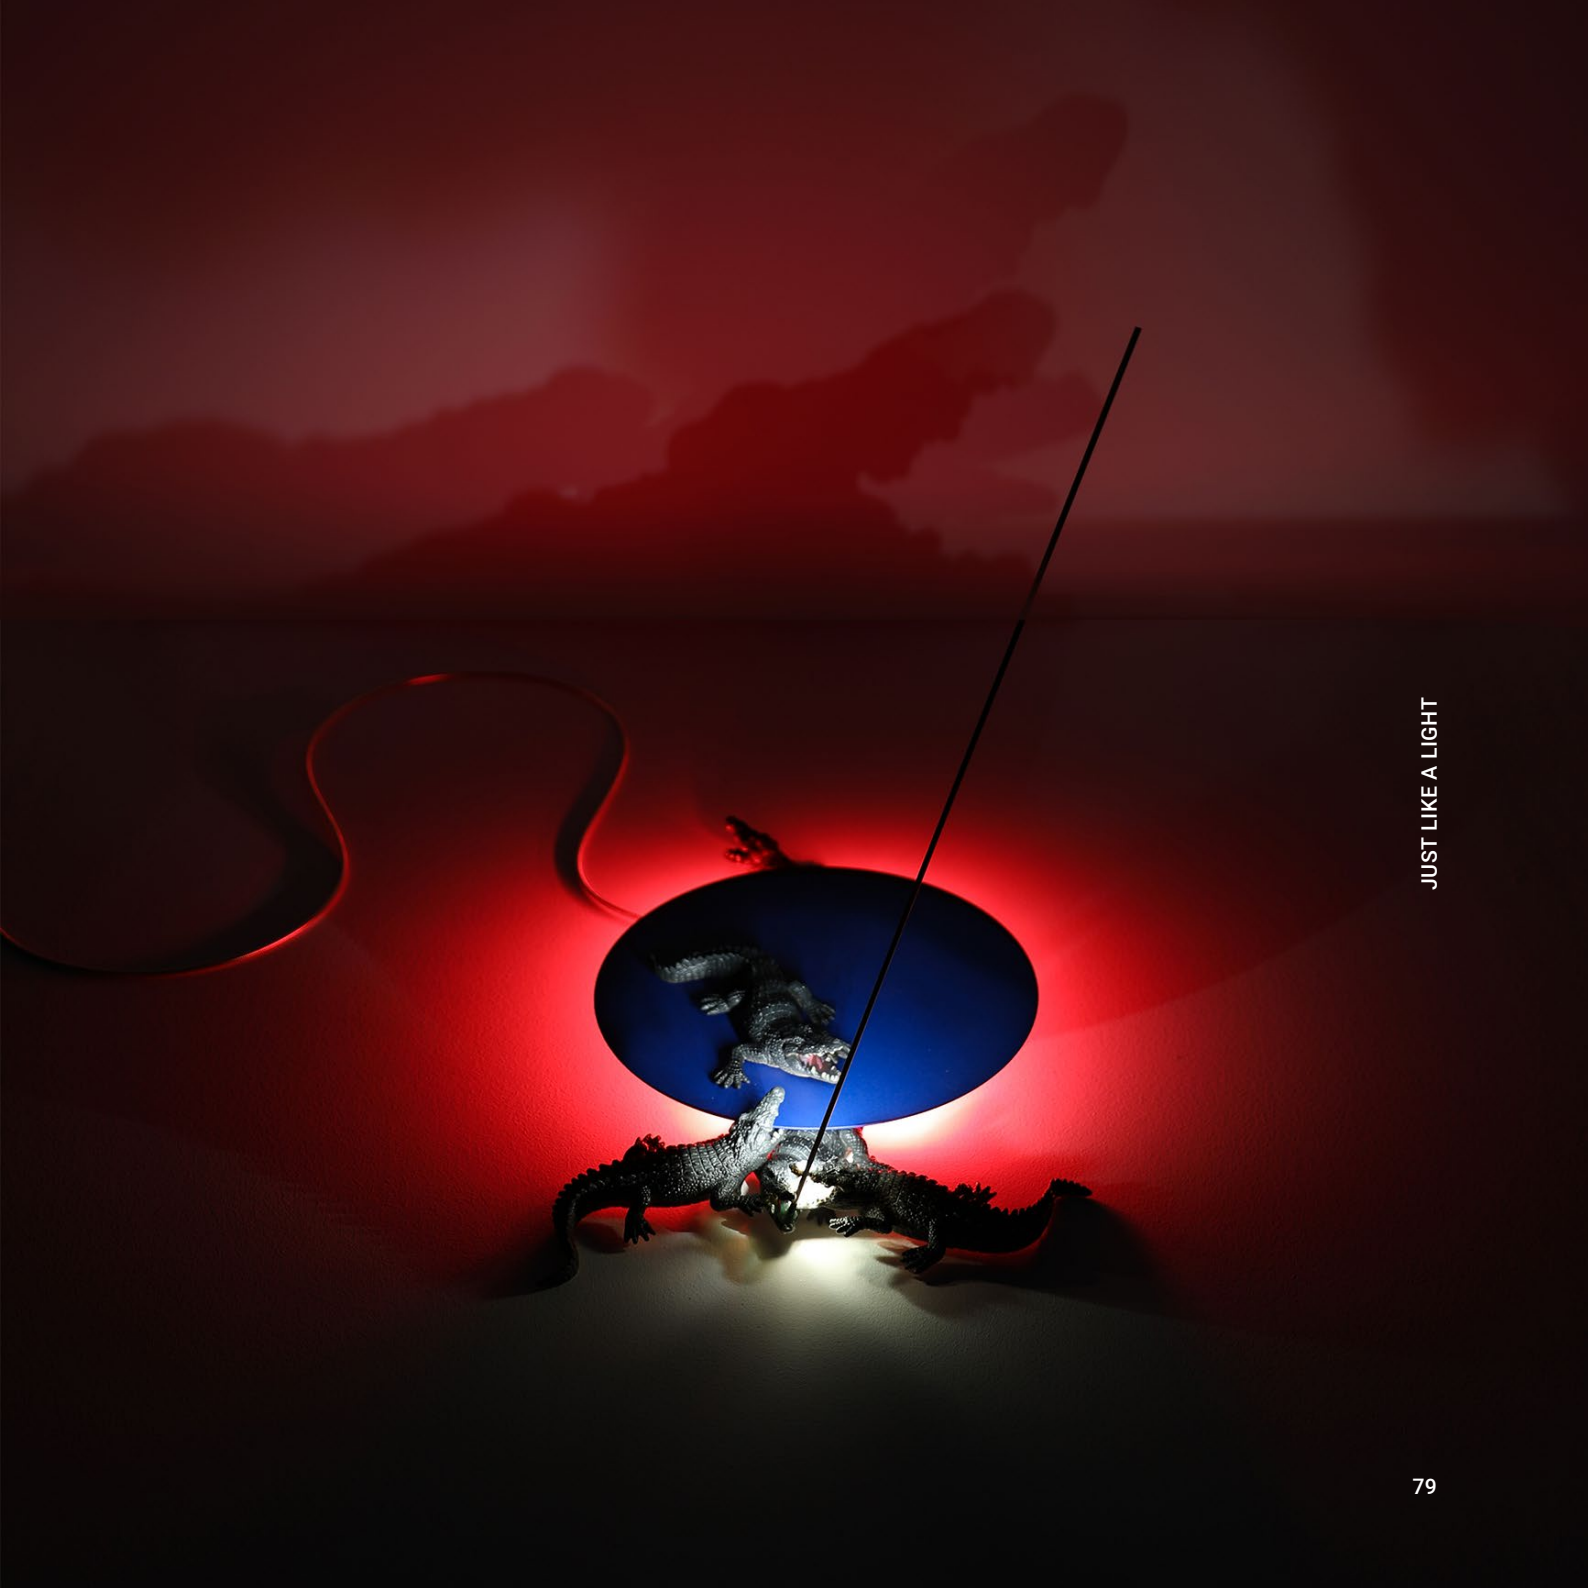

JUST LIKE A LIGHT

JUST LIKE A LIGHT (omaggio non dichiarato)

		Global code	US code	CN code
Just like a light	3000K - Dimmer on board	1A4560000.30.06	-	-

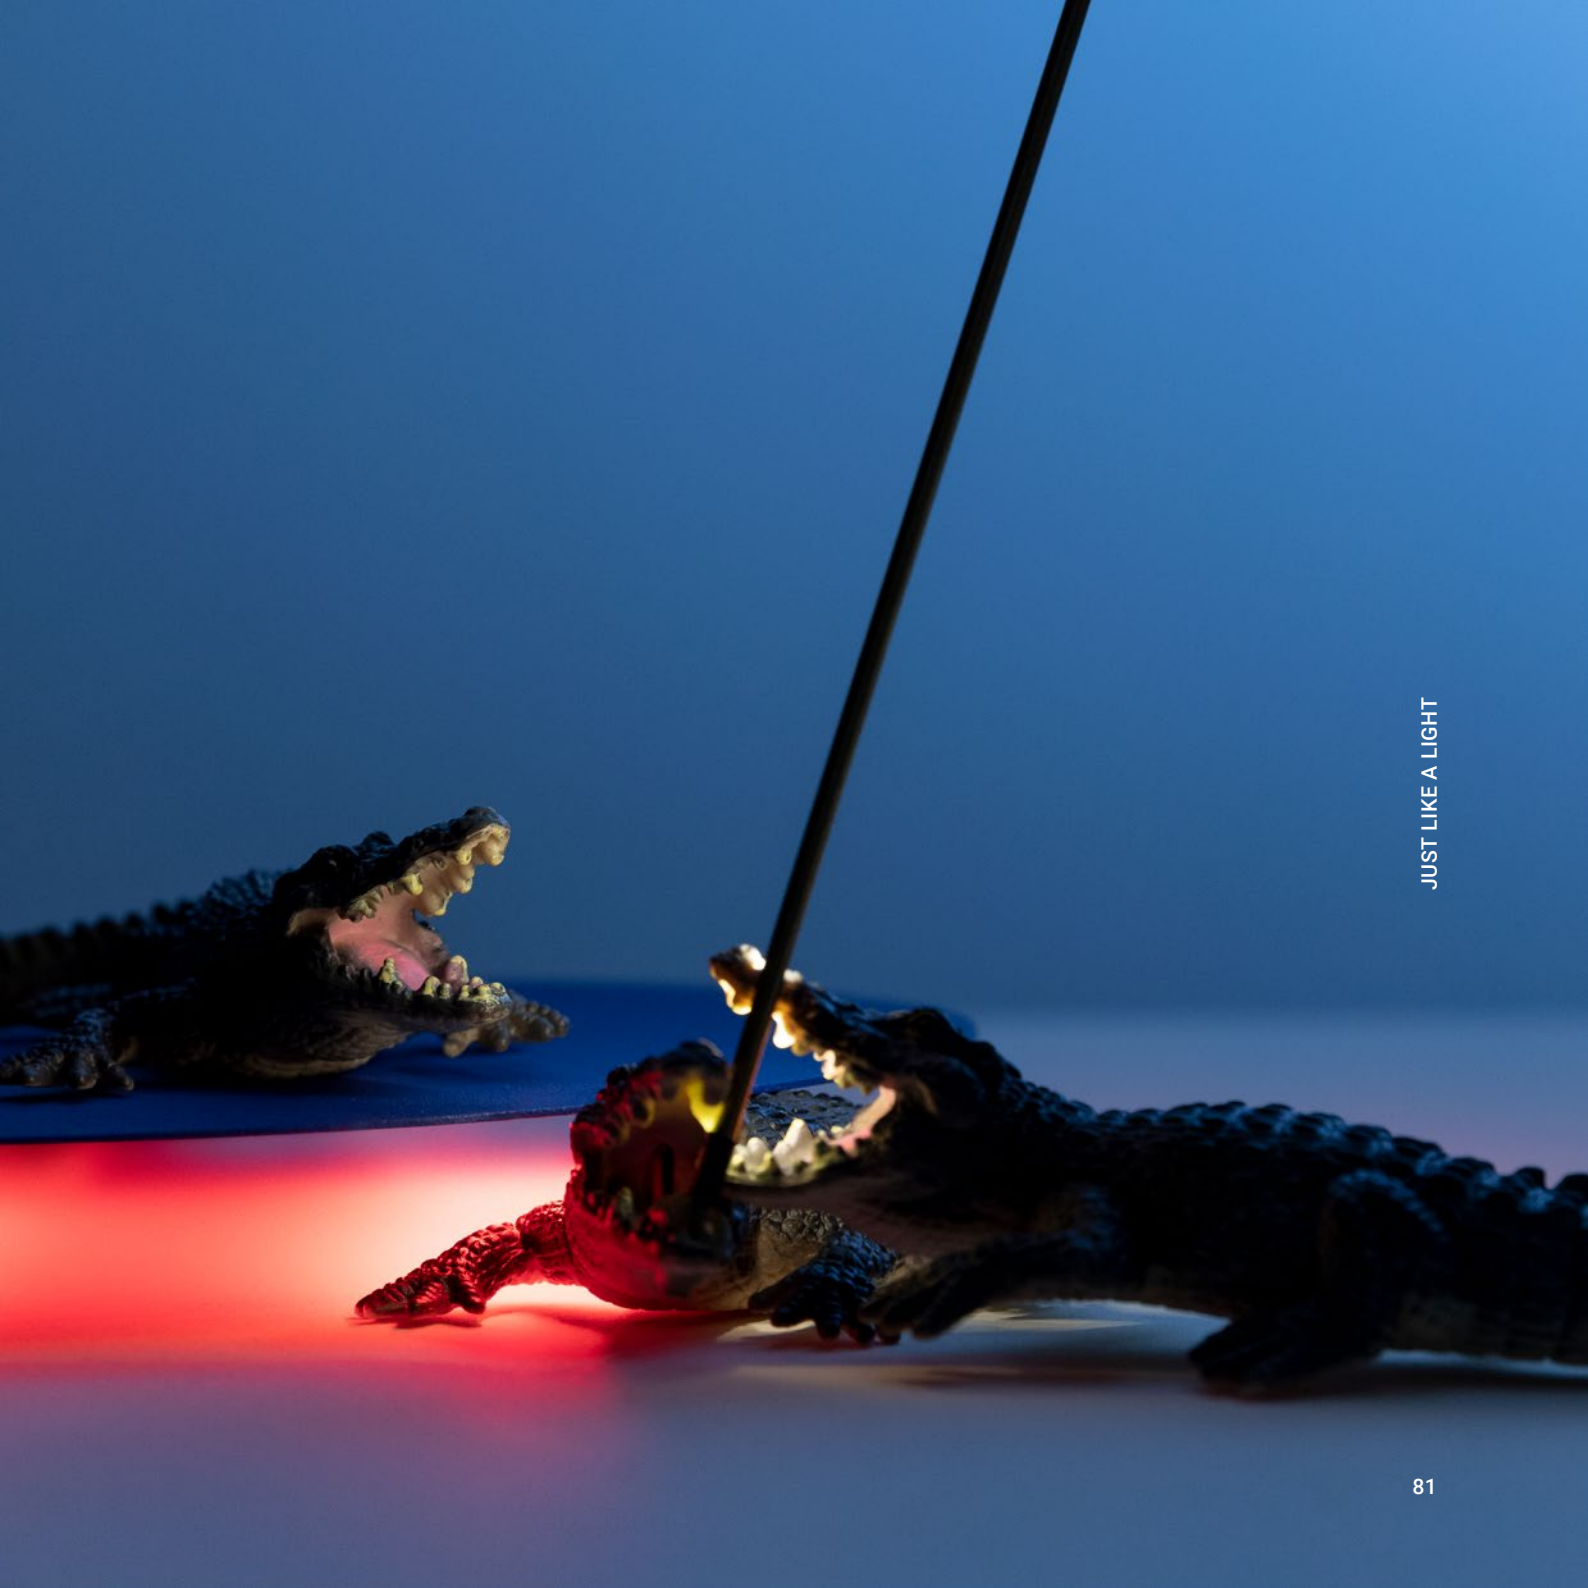

JUST LIKE A LIGHT

La nuit est toujours une source d'inspiration. Nous marchons et nous ne sommes pas seuls.

Nuit est une petite compagne de voyage qui dessine nos promenades nocturnes.

Night has always been a source of inspiration. We walk, and we are not alone. Nuit is a small travel companion that draws our night-time journeys.


NUIT

Maurici Ginés, 2023



NUIT

Finish	Matt white Gravity black Blasted blue Blasted inox
Mounting	Wall
Environment	Indoor / Outdoor
CCT- System flux	2700K ~ 45 lm 3000K ~ 50 lm
CRI	90
Insulation class	III
Main voltage	24 V DC
Power	1 W LED
Driver	Remote
Remote dimming type	Not dimmable



CE  IP65





NUIT

		Global code	US code	CN code
Nuit - Matt white	2700K - CLIII	1A1320300.27.20	1A1320303.27.20	1A1320308.27.20
Nuit - Matt white	3000K - CLIII	1A1320300.30.20	1A1320303.30.20	1A1320308.30.20
Nuit - Gravity black	2700K - CLIII	1A1322700.27.20	1A1322703.27.20	1A1322708.27.20
Nuit - Gravity black	3000K - CLIII	1A1322700.30.20	1A1322703.30.20	1A1322708.30.20
Nuit - Blasted blue	2700K - CLIII	1A1323700.27.20	1A1323703.27.20	1A1323708.27.20
Nuit - Blasted blue	3000K - CLIII	1A1323700.30.20	1A1323703.30.20	1A1323708.30.20
Nuit - Blasted inox	2700K - CLIII	1A1323800.27.20	1A1323803.27.20	1A1323808.27.20
Nuit - Blasted inox	3000K - CLIII	1A1323800.30.20	1A1323803.30.20	1A1323808.30.20

Electrical power supply		Global code	US code	CN code
Driver	24 V - 25 W - IP67 - ON-OFF	1Z1120620	1Z1120620	1Z1120620

Accessories		Global code	US code	CN code
Concrete box		1A4460000.00.00	1A4460000.00.00	1A4460000.00.00
Plaster box		1A4470000.00.00	1A4470000.00.00	1A4470000.00.00



NUIT

Nous sommes partis de l'obscurité pour révéler la lumière dans sa manifestation la plus pure et innocente.

Un petit point noir ne dévoile sa fonction que lorsque cela est nécessaire. Pour nous, le secret de la lumière ne réside pas dans la forme, ou dans certains virtuosismes productifs, mais dans le choix et dans l'adoption d'une méthode, la méthode de l'étonnement et de la mémoire.


We started with the darkness to reveal the light in its purest and most innocent manifestation.

A small black dot reveals its function only when necessary.

For us the secret of light lies not in its shape, or in some technical virtuosity, but in the choice and assumption of a method, the method of amazement and memory.

BUJO

Maurici Ginés, 2023

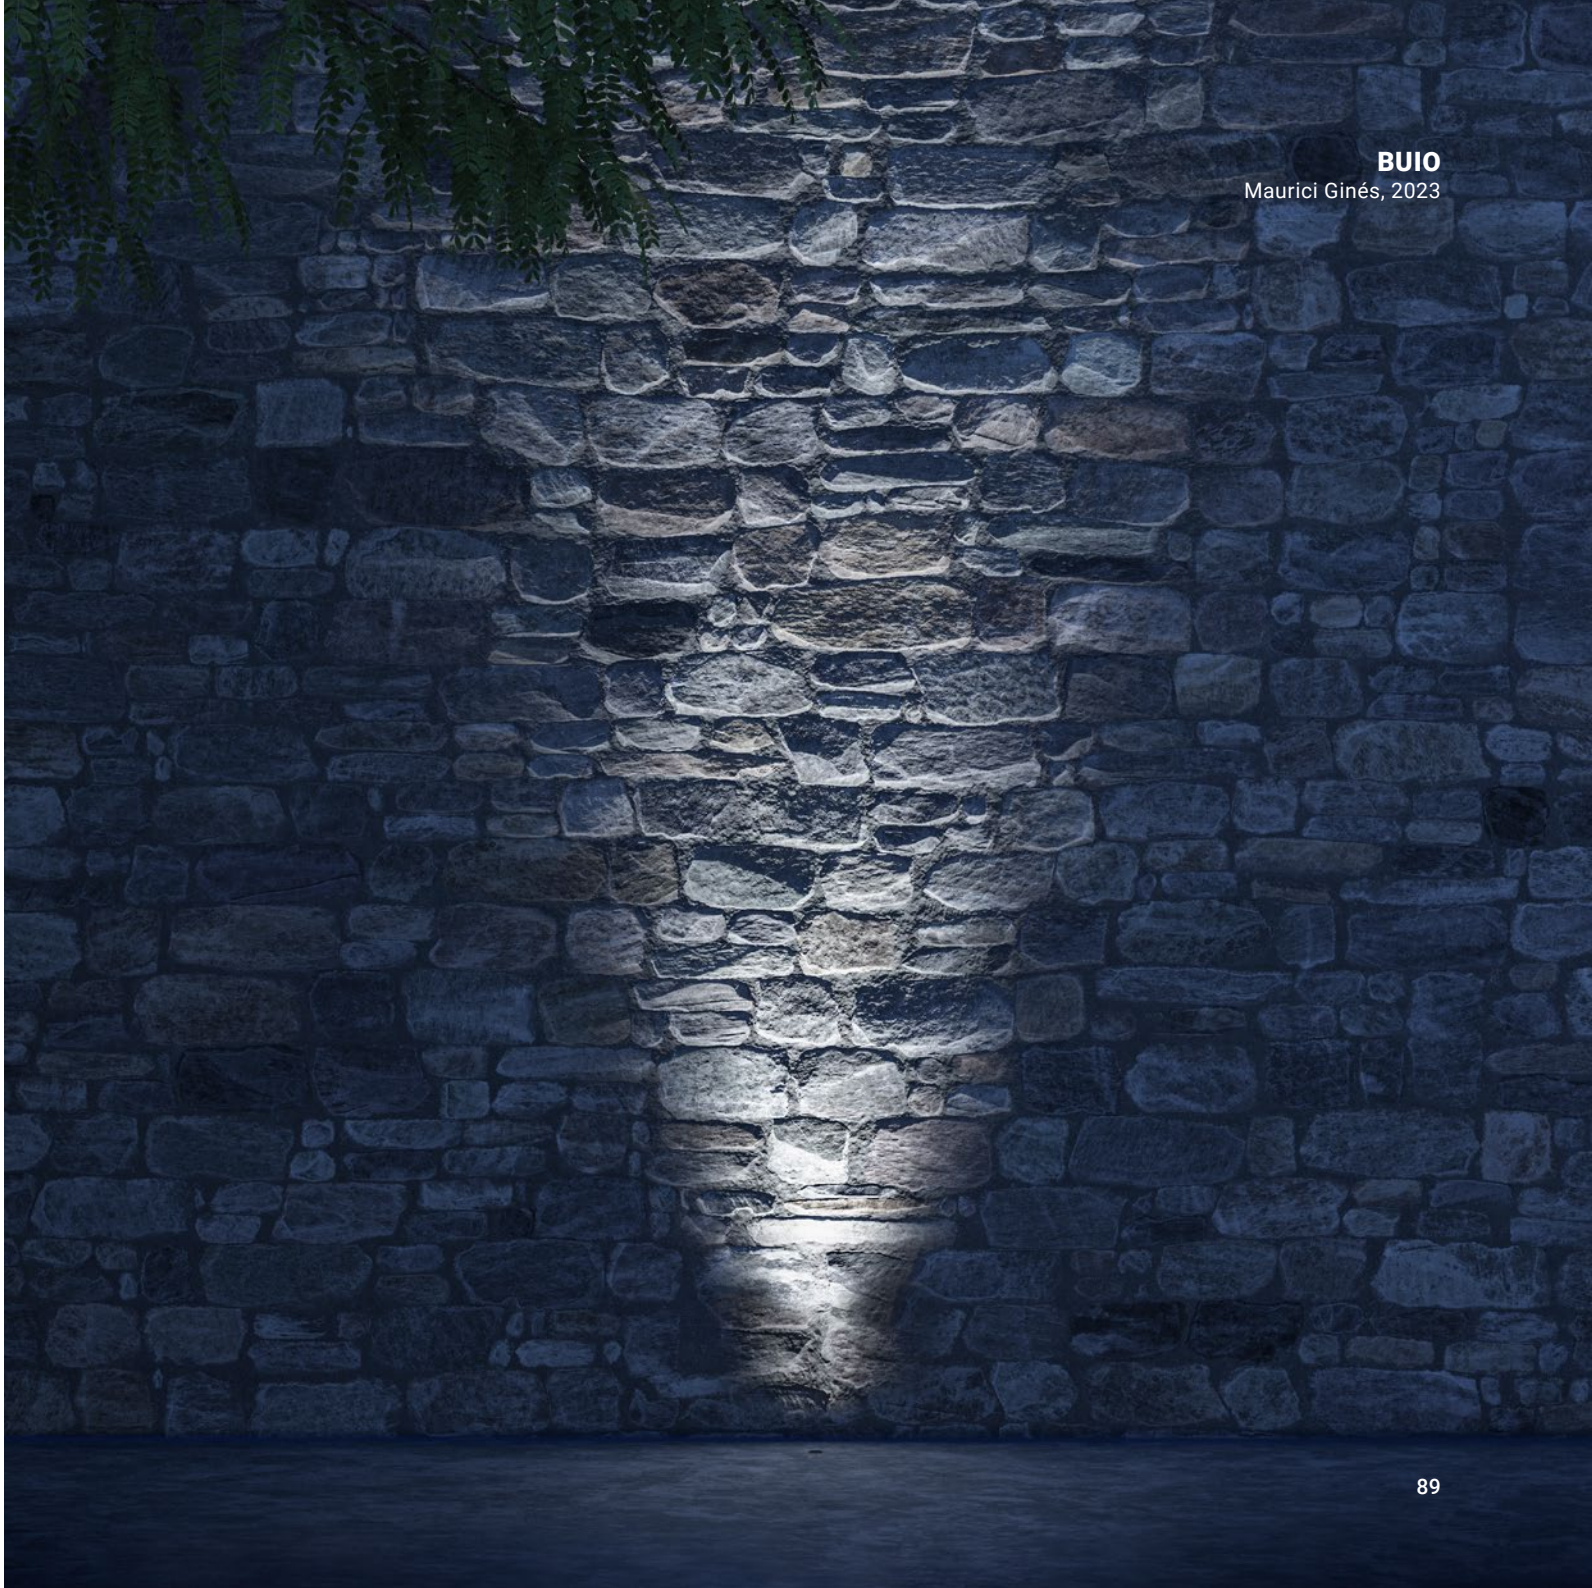

BUIO

Finish	Matt black
Mounting	Wall / Floor / Recessed
Environment	Indoor / Outdoor
CCT- System flux	2700K ~ 260 lm 3000K ~ 290 lm

CRI 90

Insulation class	III
Power	4,5 W LED
Beam	25°
LED current	24 V DC
Driver	Remote
Remote dimming type	Not dimmable

CE  IP67



BUIO

BUIO

		Global code	US code	CN code
Buio - Obscured module - Matt black	2700K - CLIII	1A4370400.27.20	1A4370403.27.20	1A4370408.27.20
Buio - Obscured module - Matt black	3000K - CLIII	1A4370400.30.20	1A4370403.30.20	1A4370408.30.20

Electrical power supply		Global code	US code	CN code
Driver	24 V - 25 W - IP67 - ON-OFF	1Z1120620	1Z1120620	1Z1120620

Accessories		Global code	US code	CN code
Installation box trim - Matt black		1A4390400.00.00	1A4390400.00.00	1A4390400.00.00
Installation box trimless - Matt black		1A4380400.00.00	1A4380400.00.00	1A4380400.00.00
Filter support and filter - Matt black	Bronze filter	1A4400400.00.00	1A4400400.00.00	1A4400400.00.00
Filter support and filter - Matt black	Gold filter	1A4410400.00.00	1A4410400.00.00	1A4410400.00.00
Snoot - Matt black		1A4420400.00.00	1A4420400.00.00	1A4420400.00.00
Wall bracket - Brushed inox		1A4431000.00.00	1A4431000.00.00	1A4431000.00.00
Ceiling rose - Matt black		1A4440400.00.00	1A4440400.00.00	1A4440400.00.00
Earth spike - Brushed inox		1A4451000.00.00	1A4451000.00.00	1A4451000.00.00


Accessories for installation


Filter support + Bronze filter	Matt black	
--------------------------------	------------	---


Filter support + Gold filter	Matt black	
------------------------------	------------	---


Snoot	Matt black	
-------	------------	---

Wall bracket	Brushed inox	
--------------	--------------	---


Ceiling rose	Matt black	
--------------	------------	---

Earth spike	Brushed inox	
-------------	--------------	--


Installation box trim	Matt black	
-----------------------	------------	---

Installation box trimless	Matt black	
---------------------------	------------	---

Installation box trim

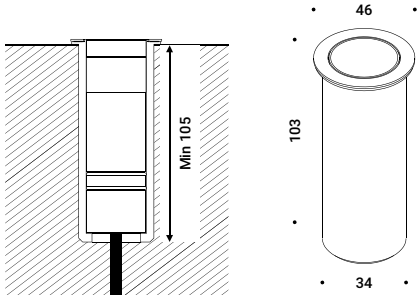

Installation box trimless

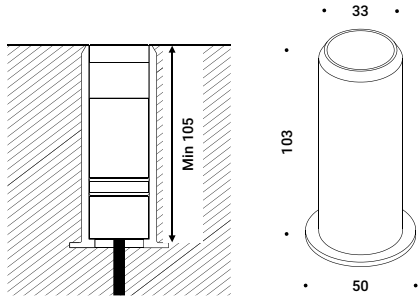

BUIO

Les ampoules abandonnées, nues, m'ont toujours ému.
Sur les murs des maisons de montagne, dans les campagnes de ma plaine.
Des travaux pas encore terminés, des lampes encore à définir, des
pensées éphémères qui deviennent poésie.

I have always been thrilled by bare, abandoned lamps.
On the walls of mountain huts, in the countryside of my plain.
Unfinished works, lamps still to be decided, ephemeral thoughts that
become poetry.

HAZARD
Davide Groppi, 2023



HAZARD


Lamp not available for US and CN market.

Finish	Standard
Mounting	Wall
Environment	Outdoor
CCT- System flux	2200K - 50 lm

CRI	80
-----	----

Insulation class	III
Main voltage	36 V DC
Power	0,6 W LED
Socket	E27
Driver	Remote

Dimming type	Not dimmable
--------------	--------------



CE  IP65



HAZARD

HAZARD

		Global code	US code	CN code
Hazard	2200K - CLIII	1A4210000.22.20	-	-
Electrical power supply		Global code	US code	CN code
Driver	36 V - 36 W - IP67 - ON-OFF	1Z1120590	-	-



HAZARD



2023.05-B

davidegroppi.com

Davide Groppi srl
Via Belizzi 20 / 22
29122 Piacenza - Italia
Ph. +39.0523.571590
info@davidegroppi.com

Davide Groppi srl © 2023
Company subject to the direction and coordination of Italian Design Brands spa