

VIBIA

How to request
the drawing for
PLUSMINUS




HOW TO FILL THE FORM (example)

COMPLETE THE FORM FOR EVERY COMPOSITION

1. Attach a sketch of the composition with its measurement
2. Include the desire luminaires in the form
3. Tick the required belt finish box
4. Tick the required control in combination with the electrical connection

1.

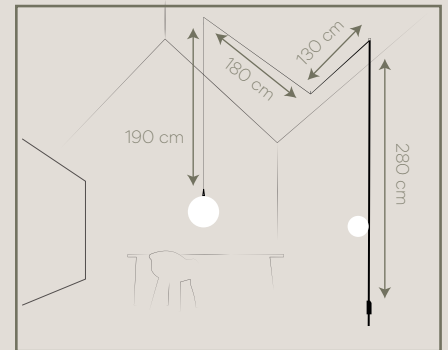

2. LUMINAIRES

SPHERE



		Qty. Blue	Qty. Terra Red	Qty. Black	Qty. Green	Qty. White grey
Ø 20 cm	2700 K	1				
	3000 K					
	3500 K					
Ø 30 cm	2700 K					
	3000 K	1				
	3500 K					

3. BELT FINISH




Black

☐


Blue

☐


Terra Red

☒


Green

☐

4. CONTROL

ELECTRICAL CONNECTION

	Surface 25 - 240 W	Built-in 25 - 240 W	Remote 25 - 240 W	Plug Max 60W	Wire connector Optional
On / Off	☐	☐	☐	☐	☐
Push Switch	—	—	—	☐	—
Push Simultaneous	☐	☐	☐	—	☐
1-10V Simultaneous	☐	☐	☐	—	☐
DALI Simultaneous	☐	☐	☐	—	☐
Casambi Simultaneous	☐	☐	☐	—	☐
Casambi integrated on each individual luminaire (P2P)	☐	☐	☐	☐	☐

START FILLING THE FORM

Indicate the exact number of luminaires desired

SPHERE



		Qty. Blue	Qty. Terra Red	Qty. Black	Qty. Green	Qty. White grey
Ø 20 cm	2700 K					
	3000 K					
	3500 K					
Ø 30 cm	2700 K					
	3000 K					
	3500 K					

SEMISPHERE



		Qty. Blue	Qty. Terra Red	Qty. Black	Qty. Green	Qty. White grey
Ø 20 cm	2700 K					
	3000 K					
	3500 K					
Ø 30 cm	2700 K					
	3000 K					
	3500 K					

CONE



		Qty. Blue	Qty. Terra Red	Qty. Black	Qty. Green	Qty. White grey
Ø 60 cm	2700 K					
	3000 K					
	3500 K					
Ø 80 cm	2700 K					
	3000 K					
	3500 K					

LINEAR DIFFUSER




		Qty. Blue	Qty. Terra Red	Qty. Black	Qty. Green	Qty. White grey
102 cm	2700 K					
	3000 K					
	3500 K					
202 cm	2700 K					
	3000 K					
	3500 K					

SPOTLIGHT



		Qty. Blue	Qty. Terra Red	Qty. Black	Qty. Green	Qty. White grey
12°	2700 K					
	3000 K					
	3500 K					
24°	2700 K					
	3000 K					
	3500 K					
55°	2700 K					
	3000 K					
	3500 K					
DIRECTED DIFFUSION	2700 K					
	3000 K					
	3500 K					

LINEAR LOW UGR HIGH-COMFORT

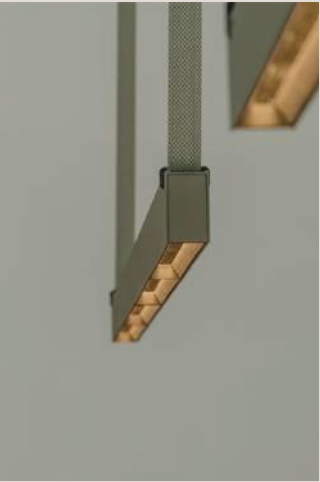

		Qty. Blue	Qty. Terra Red	Qty. Black	Qty. Green	Qty. White grey
26.8 cm	2700 K					
	3000 K					
	3500 K					
52.5 cm	2700 K					
	3000 K					
	3500 K					
103.7 cm	2700 K					
	3000 K					
	3500 K					

LINEAR LOW LIGHT UGR HIGH-EFFICENCY



		Qty. Blue	Qty. Terra Red	Qty. Black	Qty. Green	Qty. White grey
26.8 cm	2700 K					
	3000 K					
	3500 K					
52.5 cm	2700 K					
	3000 K					
	3500 K					
103.7 cm	2700 K					
	3000 K					
	3500 K					

BELT FINISH

Tick the required belt finish box



Black

☐

Blue

☐

Terra Red

☐

Green

☐

CONTROL | ELECTRICAL CONNECTION

Tick the required control in combination with the electrical connection

	Surface 25 - 240 W	Built-in 25 - 240 W	Remote 25 - 240 W	Plug Max 60W	Wire connector Optional
On / Off	☐	☐	☐	☐	☐
Push Switch	☐	☐	☐	☐	☐
Push Simultaneous	☐	☐	☐	☐	☐
1-10V Simultaneous	☐	☐	☐	☐	☐
DALI Simultaneous	☐	☐	☐	☐	☐
Casambi Simultaneous	☐	☐	☐	☐	☐
Casambi integrated on each individual luminaire (P2P)	☐	☐	☐	☐	☐